
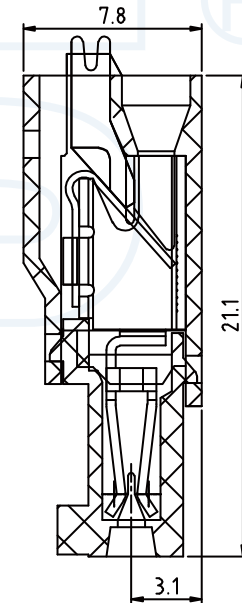
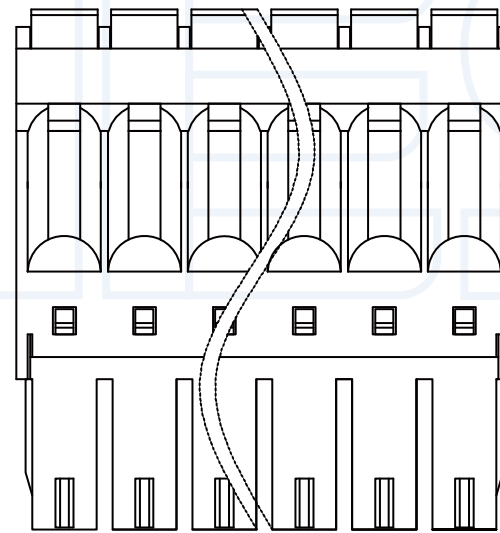


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing: PA66 UL94V-0
 端子: 黄铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电压: 300V AC/DC .
 Voltage Rating: 300V AC/DC.
 额定电流: 12 AMP.(AWG #16-24) .
 Raring Current: 12 AMP.(AWG #16-24) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 耐电压: 2500V AC/MINUTE
 Withstanding Voltage: 2500V AC/MINUTE
 温度范围: -40度至+105度
 Temperature Range: -40°C to +105°C

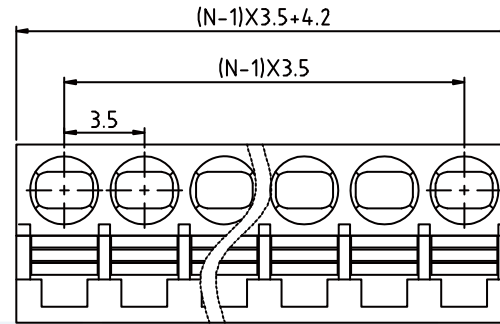

2p to 6p with wedge, above 7p without wedge(including 7p)

N=Number of contacts

ORDERING INFORMATION

JX 35- XX F S S1 B GD

- SERLES NO 35:3.5mm
- NVO.OF PINS
- JX=TERMINAL Per Row BLOCKS 02-24P
- TYPE
- F=FEMALE
- M=MALE
- P=PIERCE
- CONTACT PLATING
- FULL OF GOLD SEMI-GOLD
- S1=ORDINARY TIN PLATED
- S2=MATTE TIN PLATED
- S3=TIN-PLATED HIGH-TEMPERATURE
- CONTACTL SHAPE
- S:STRAIGHT
- R:Right Angle
- WT:Right Angle SMT
- INSULATOR MATERIAL
- A:PA46
- B:PA66
- C:PA9T
- D:LCP
- PACKING
- A:PE Bag
- B:TUBE
- C:TRAY
- D:BOX
- COLOUR
- B:BLACK
- L:BLUE
- G:GREE

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

527-3.5mm 绿色端子 母座 (F73-J)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

JX35-XXFSS1BGD

DRAWING NO:

1 2 3 4 5 6 7 8 9