

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)





胶芯: PA66 UL94V-0
 Housing: PA66 UL94V-0
 端子: 黄铜
 Contact: Phosphor bronze

2-特性 (characteristics):

额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC.
 额定电流: 15 AMP.(AWG #16-22) .
 Rating Current: 15 AMP.(AWG #16-22) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 耐电压: 2500V AC/MINUTE
 Withstanding Voltage: 2500V AC/MINUTE
 温度范围: -40度至+105度
 Temperature Range: -40°C to +105°C

ORDERING INFORMATION

JX762- XX M S S1 B BD

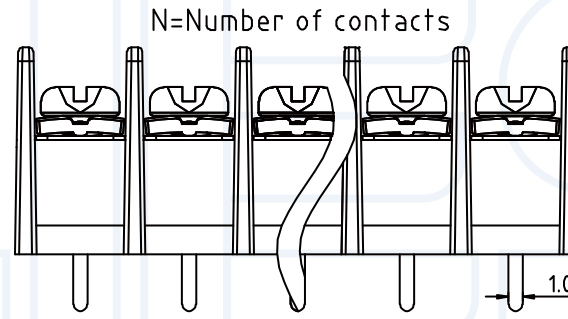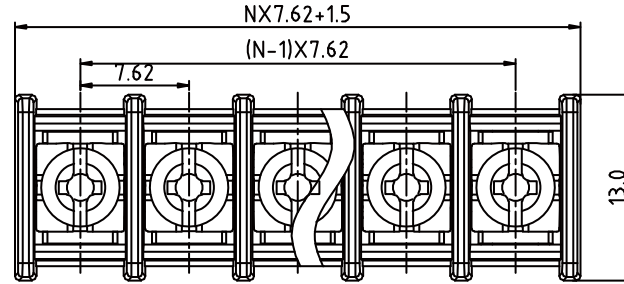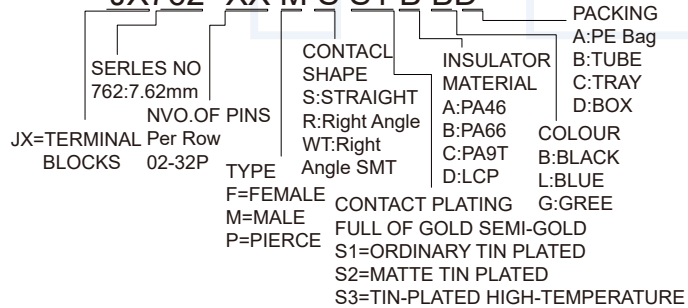

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 537-7.62mm 黑色端子 公座180度 (U131)

DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: JX762-XXMSS1BBD

DRAWING NO: