

| | | | | | | | |
|-------|--------|-----|-------|-------------|----------|------|------|
| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |



Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
Contact: Brass/0.8u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL

2-特性 (characteristics):

额定电流: 2AMP
Raring Current: 2 AMP .
接触阻抗: 20mΩ MAX.
Contact Resistance: 20mΩ MAX .
绝缘阻抗: 1000MΩMIN.
Insulating Resistance: 1000MΩMIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40度至+105度
Temperture Range: -40°Cto +105°C

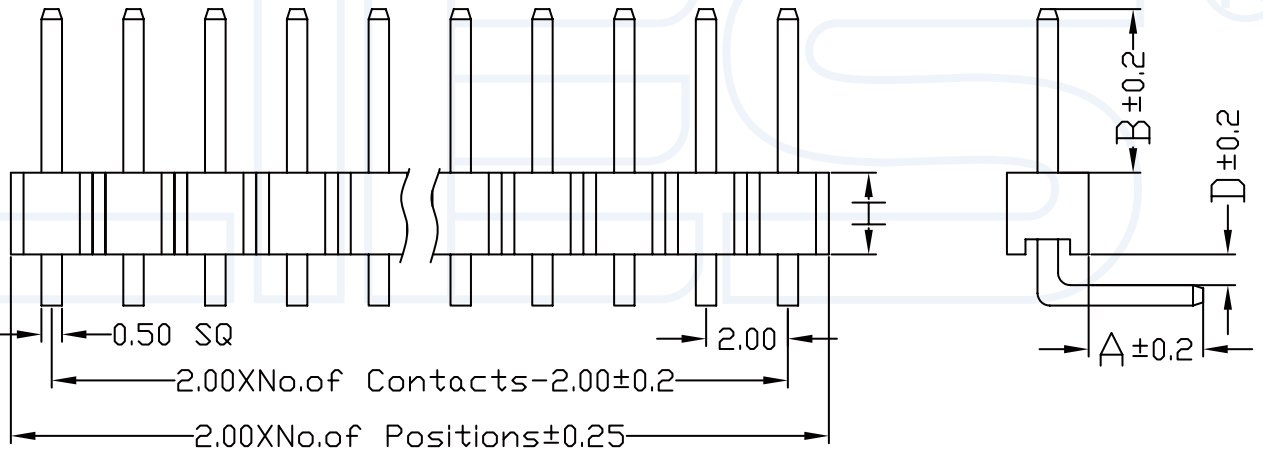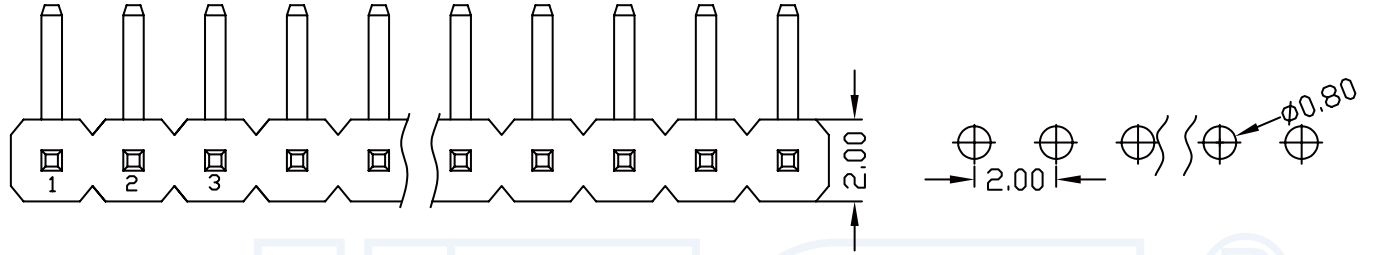

ORDERING INFORMATION

15XX-11 XX XX X R XXX X 1

| | | |
|---|---|--|
| NO.OF PINS PER ROW 02-40P | INSULATOR MATERIAL A:PBT B:PA6T C:PA9T D:LCP | PACKING A:PE Bag B:TOPE&REED C:TUBE D:TUBE+CAP E:TRAY |
| HEIGHT OF HOUSING 10:1.0mm 15:1.5mm 20:2.0mm | CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE | LENGTH OF TERMINAL |

| Dimension antitheses list | | | | | | | |
|---------------------------|-----|-----|-----|-----|-----|---|------|
| ITEM | A | B | H | | | D | |
| Standard | 2.8 | 4.0 | 1.0 | 1.5 | 2.0 | 0 | 0.75 |
| Alternate | | | | | | | |

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 37-2.0mm 单排排针 单塑90度

DATE 2018-02-18

| | | | | |
|-----------|-------|---------|-----------|----------|
| PROJECTON | REV A | UNIT mm | SCALE 1:1 | PAGE 1/1 |
|-----------|-------|---------|-----------|----------|

PART NO: 15XX-11XXXXXRXXXX1

DRAWING NO: