
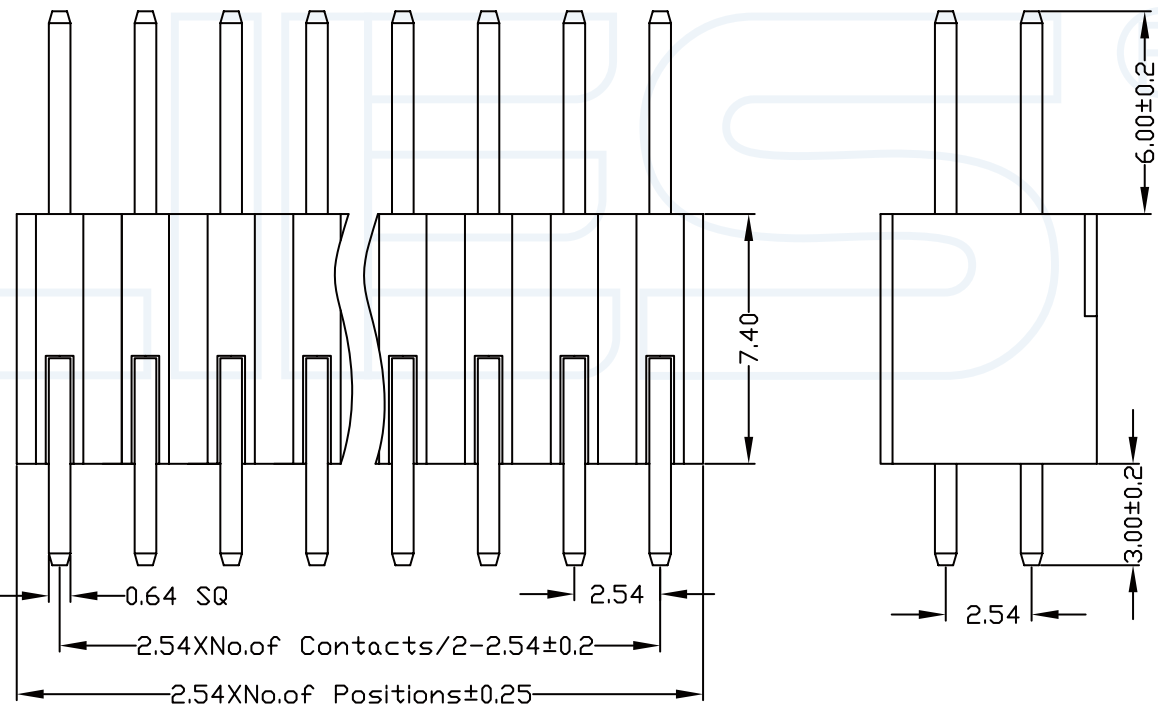


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国防
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL
- 2-特性 (characteristics):
 额定电流: 3 AMP
 Raring Current: 3 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°Cto +105°C

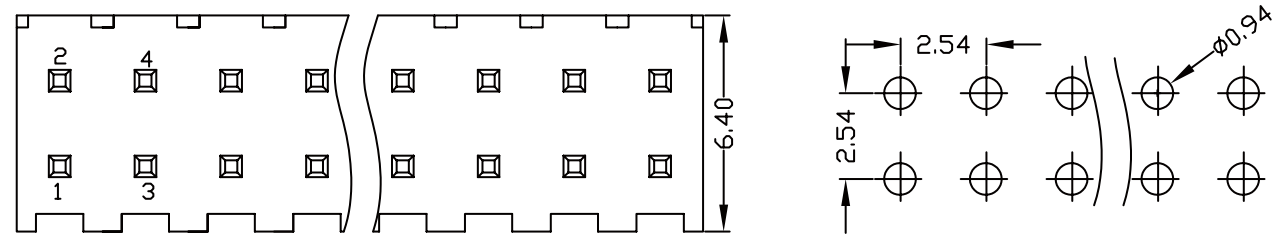

ORDERING INFORMATION

1674-12 XX XX X S 164 X 1

- | | | |
|-----------------------------------|--|--|
| NO.OF PINS
PER ROW
02-40P | INSULATOR
MATERIAL
A:PBT
B:PA6T
C:PA9T
D:LCP | PACKING
A:PE Bag
B:TOPE&REED
C:TUBE
D:TUBE+CAP
E:TRAY |
| HEIGHT OF
HOUSING
74:7.40mm | CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8u"
... ..
A9=30u" B9=30u"
S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE | LENGTH
OF
TERMINAL |

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 78-2.54mm 双排排针 单塑180度 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: 1674-12XXXXXS164X1 DRAWING NO: