

1 2 3 4 5 6 7 8 9

| ANGLE | ± 5°   | REV | LOCAS | DESCRIPTION | DESIGN   | DATE | 卫国峰  |
|-------|--------|-----|-------|-------------|----------|------|------|
| X.XXX | ± 0.05 | 01  |       |             | DRAWN    | DATE | 尚伟   |
| X.XX  | ± 0.15 | 02  |       |             | CHECKED  | DATE | 吴汉学  |
| X.X   | ± 0.25 | 03  |       |             | AUDITED  | DATE | 龚劲松  |
| X     | ± 0.50 | 04  |       |             | APPROVED | DATE | eric |


**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

**2-特性 (characteristics):**

额定电流: 3 AMP  
 Raring Current: 3 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperture Range: -40°Cto +105°C

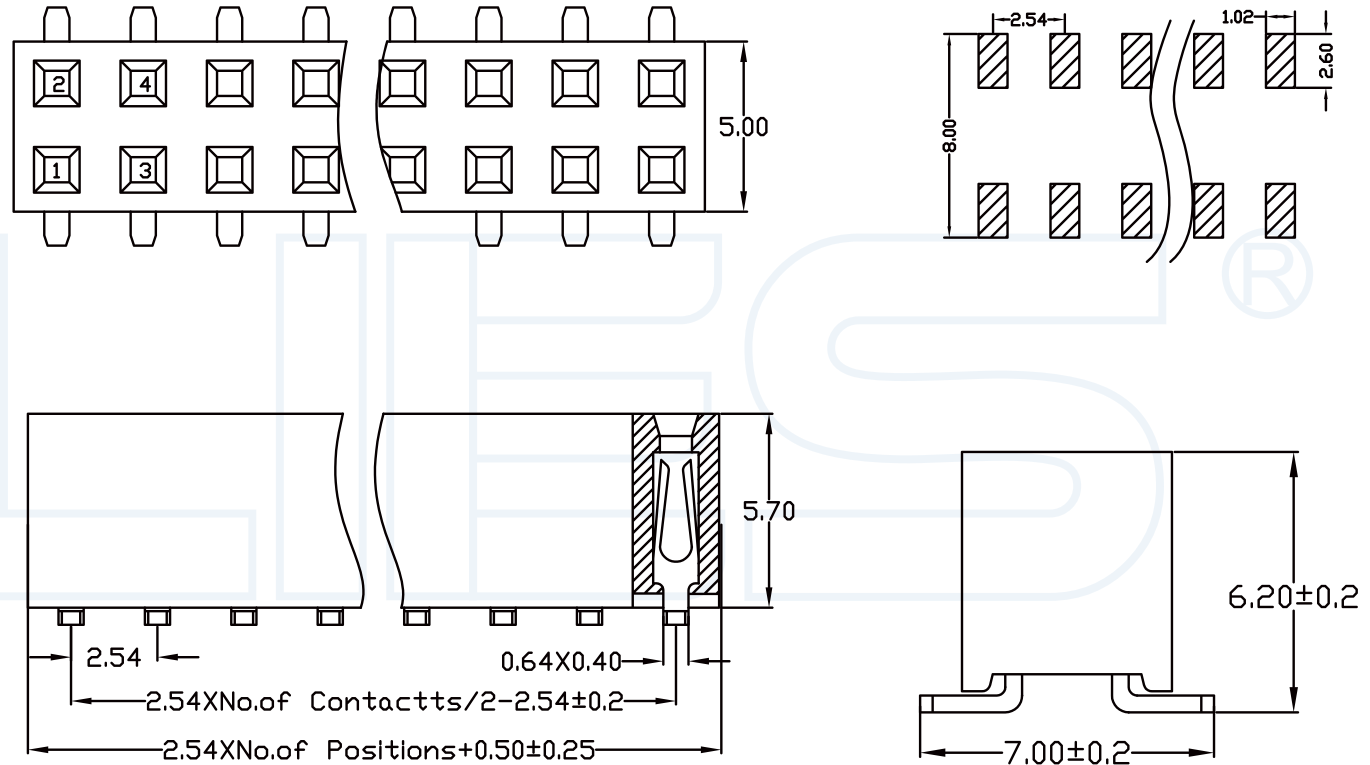

**ORDERING INFORMATION**

**2657-12 XX XX X MY X 1**

|   |  |  |
|---|--|--|
| NO.OF PINS<br>PER ROW<br>02-40P   | INSULATOR<br>MATERIAL<br>B:PA6T<br>C:PA9T<br>D:LCP | PACKING<br>A:PE Bag<br>B:TOPE&REED<br>C:TUBE<br>D:TUBE+CAP<br>E:TRAY |
| CONTACT PLATING<br>FULL OF GOLD SEMI-GOLD<br>A0=0.8u" B0=0.8u"                  |  |  |
| ....<br>A9=30u" B9=30U"   |  |  |
| S1=ORDINARY TIN PLATED<br>S2=MATTE TIN PLATED<br>S3=TIN-PLATED HIGH-TEMPERATURE |  |  |

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

141-2.54mm 双排排母 Y端 SMT

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

2657-12XXXXXXMYX1

DRAWING NO:

1 2 3 4 5 6 7 8 9