

| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
|-------|--------|-----|-------|-------------|----------|------|------|
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
Contact: Brass/0.8u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL


2-特性 (characteristics):

额定电流: 3 AMP
Raring Current: 3 AMP .
接触阻抗: 20mΩ MAX.
Contact Resistance: 20mΩ MAX .
绝缘阻抗: 1000MΩMIN.
Insulating Resistance: 1000MΩMIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40度至+105度
Temperature Range: -40°Cto +105°C

ORDERING INFORMATION

2659-12 XX XX X RU X 1

| | | |
|--|--|--|
| NO.OF PINS PER ROW 02-40P | INSULATOR MATERIAL B:PA6T C:PA9T D:LCP | PACKING A:PE Bag B:TOPE&REED C:TUBE D:TUBE+CAP E:TRAY |
| CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" | ... | ... |
| A9=30u" B9=30U" | S1=ORDINARY TIN PLATED | S2=MATTE TIN PLATED |
| | S3=TIN-PLATED HIGH-TEMPERATURE | |

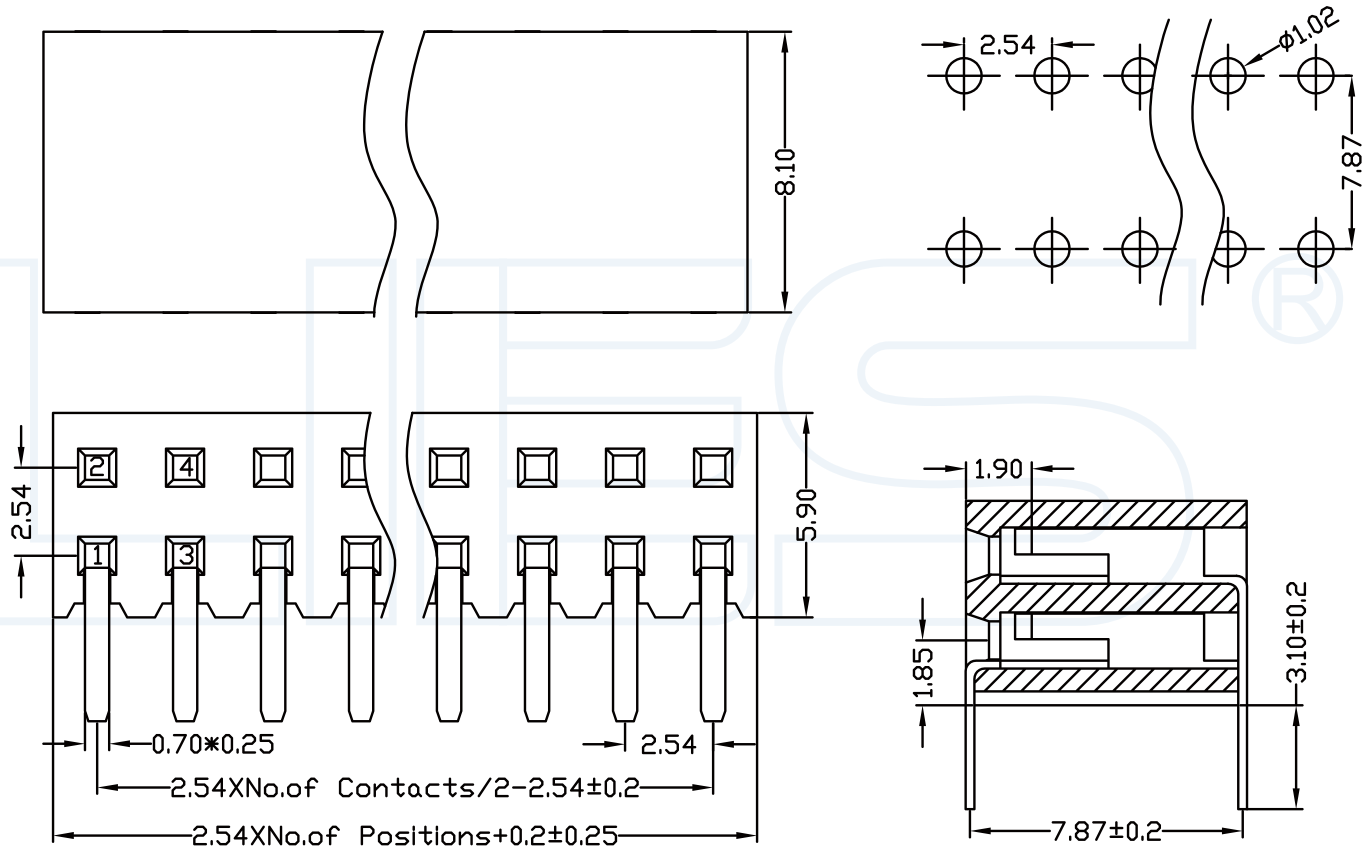

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

142-2.54mm 双排排母 U端 侧插90度

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

2659-12XXXXXRUX1

DRAWING NO:

1

2

3

4

5

6

7

8

9