


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL

2-特性 (characteristics):
 额定电流: 1 AMP
 Raring Current: 1 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperture Range: -40°Cto +105°C

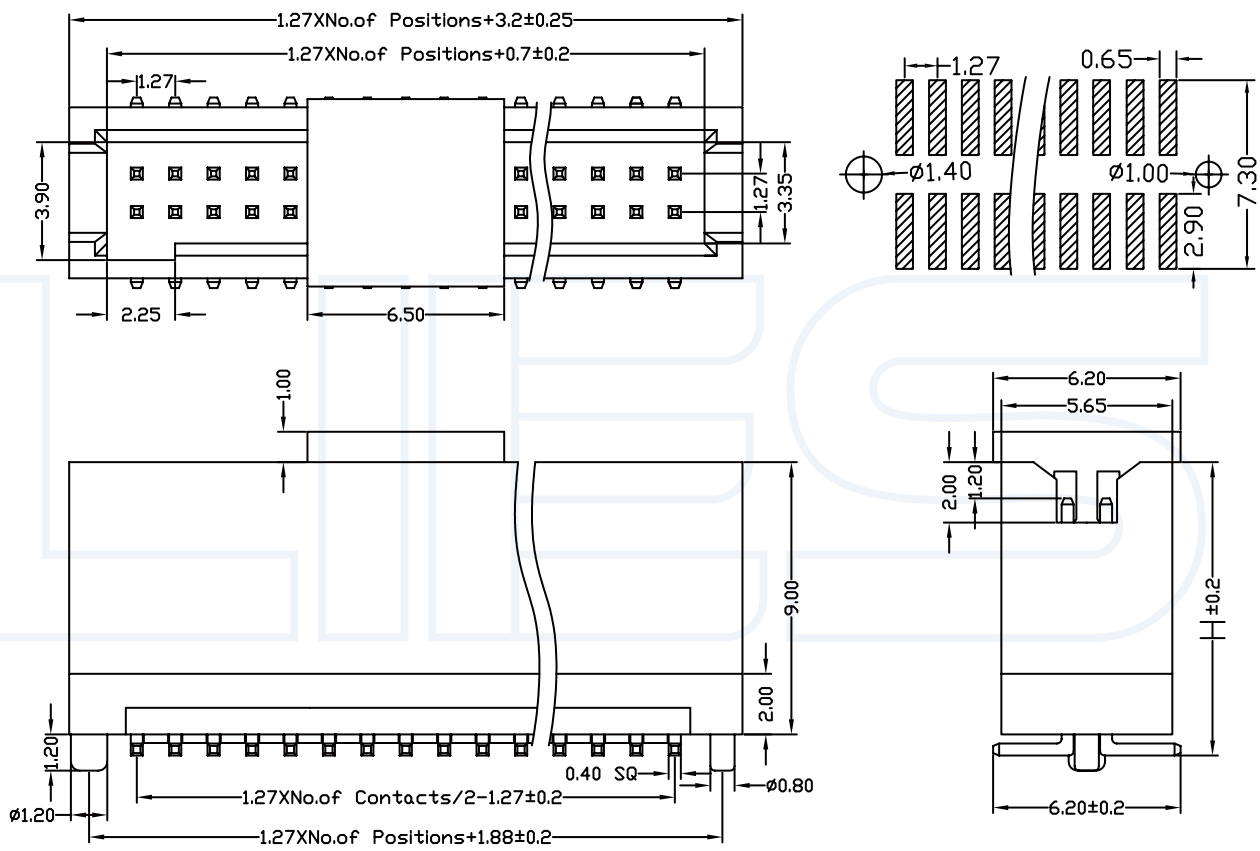

ITEM	DIM*H*
1	9.50
2	9.90
3	10.10
4	10.90
5	11.20
6	11.50
7	11.70
8	12.00
9	12.70
10	14.60
11	15.70
12	16.10
13	17.8

ORDERING INFORMATION
3390-2 XX XX X MX X 1

NO.OF PINS PER ROW: 06-100P
 INSULATOR MATERIAL: A:PE Bag, B:PA6T, C:PA9T, D:LCP
 PACKING: A:PE Bag, B:TOPE&REED, C:TUBE, D:TUBE+CAP, E:TRAY
 HEIGHT OF HOUSING: 95:9.5mm
 CONTACT PLATING: FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"
 A9=30u" B9=30U"
 S1=ORDINARY TIN PLATED
 S2=MATTE TIN PLATED
 S3=TIN-PLATED HIGH-TEMPERATURE

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 181-1.27mm 简易牛角 双塑加高型 SMT

DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: 3390-2XXXXXMXX1 DRAWING NO:

1 2 3 4 5 6 7 8 9