

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国防
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric



**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**


胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色  
Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black  
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
Contact: Brass/0.8u"MIN GOLD PLATING  
OVER ALL 30u"MIN NICKEL UNDERPLATING  
OVER ALL

**2-特性 (characteristics):**

额定电流: 3 AMP  
Raring Current: 3 AMP .  
接触阻抗: 20mΩ MAX.  
Contact Resistance: 20mΩ MAX .  
绝缘阻抗: 1000MΩMIN.  
Insulating Resistance: 1000MΩMIN.  
耐电压: AC 500V.  
Withstanding Voltage: AC 500V.  
温度范围: -40度至+105度  
Temperature Range: -40°Cto +105°C

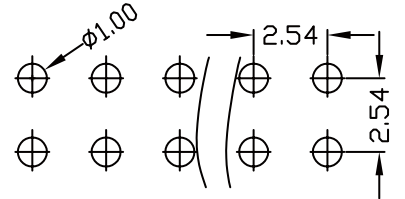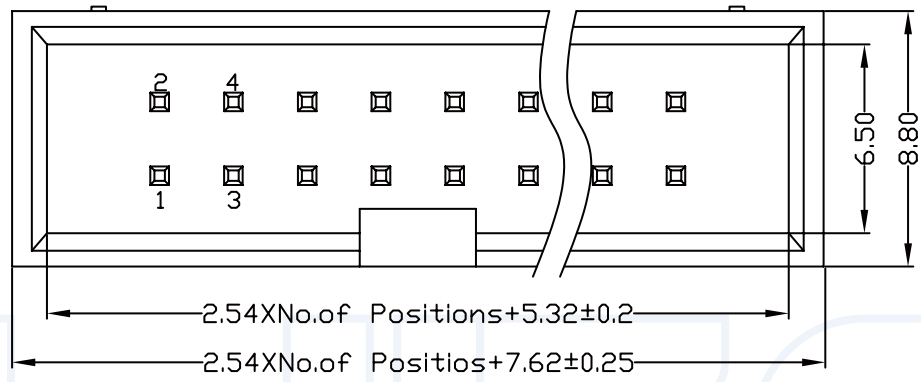

L	
6P~ 8P	10P~ 64P
4.00	4.4

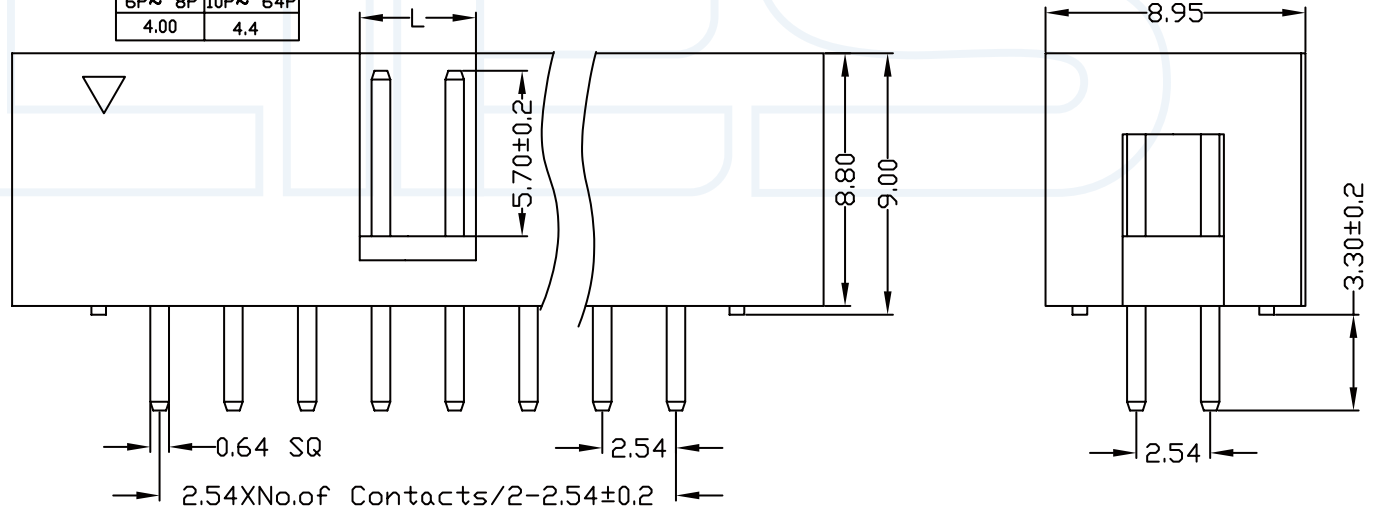

**ORDERING INFORMATION**

**3690-2 XX XX X SX X 1**

NO. OF PINS PER ROW 06-64P	INSULATOR MATERIAL B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: TOPE&REED C: TUBE D: TUBE+CAP E: TRAY
HEIGHT OF HOUSING 100: 10mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8u" ..... A9=30u" B9=30u" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel: 0769-85381995 / Fax: 0769-85493987 / Email: ylies@ylies.cn / Web: www.ylies.cn

TITLE: 195-2.54mm 简易牛角 180度 DATE: 2018-02-18

PROJECTON: REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1 PART NO: 3690-1XXXXXSXX1 DRAWING NO: