
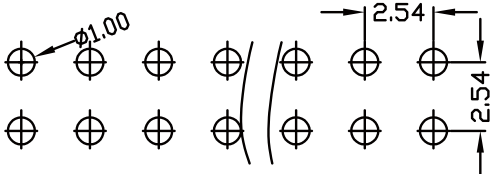


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫
X.XXX	± 0.05	01			DRAWN	DATE	尚
X.XX	± 0.15	02			CHECKED	DATE	吴
X.X	± 0.25	03			AUDITED	DATE	龚
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
 Housing:PA6T/PBT+30%G.F UL94V-0,Color:Black
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL
 2-特性 (characteristics):
 额定电流: 3 AMP
 Raring Current:3 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance:20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance:1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage:AC 500V.
 温度范围: -40度至+105度
 Temperture Range: -40°Cto +105°C

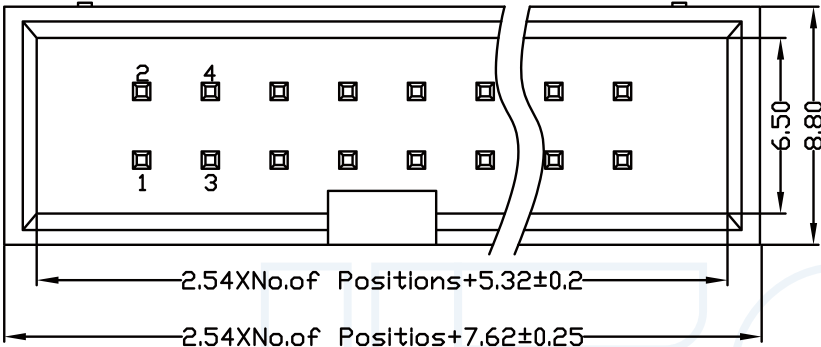

ORDERING INFORMATION

3690-2 XX XX X RX X 1



NO.OF PINS
PER ROW
06-64P

INSULATOR
MATERIAL
A:PE Bag
B:PA6T
C:PA9T
D:LCP

PACKING
A:PE Bag
B:TOPE&REED
C:TUBE
D:TUBE+CAP
E:TRAY

HEIGHT OF
HOUSING
90:9.0mm

CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8U"
... ..
A9=30u" B9=30U"
S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE

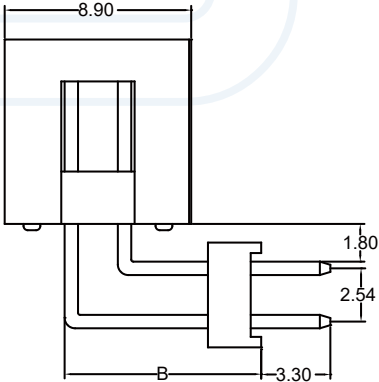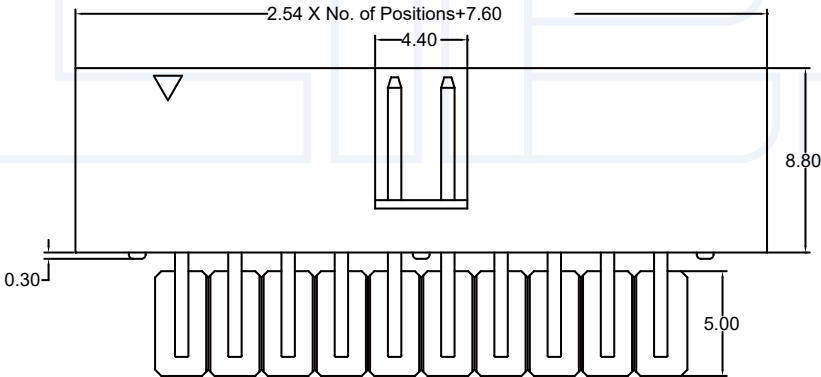

YLIES® 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON  REV A UNIT mm SCALE 1:1 PAGE 1/1

TITLE

199-2.54mm 简易牛角 加塑胶90度

DATE

2018-02-18

PART NO:

3690-2XXXXXXRXX1

DRAWING NO:

1 2 3 4 5 6 7 8 9