

| ANGLE | ± 5°   | REV | LOCAS | DESCRIPTION | DESIGN   | DATE | 卫国峰  |
|-------|--------|-----|-------|-------------|----------|------|------|
| X.XXX | ± 0.05 | 01  |       |             | DRAWN    | DATE | 尚伟   |
| X.XX  | ± 0.15 | 02  |       |             | CHECKED  | DATE | 吴汉学  |
| X.X   | ± 0.25 | 03  |       |             | AUDITED  | DATE | 龚劲松  |
| X     | ± 0.50 | 04  |       |             | APPROVED | DATE | eric |



### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)

胶芯: PA6T/LCP+30%G.F UL94V-0, 颜色: 黑色  
Housing: PA6T/LCP+30%G.F UL94V-0, Color: Black  
四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
Contact: Brass/0.8u"MIN GOLD PLATING  
OVER ALL 30u"MIN NICKEL UNDERPLATING  
OVER ALL

#### 2-特性 (characteristics):

额定电流: 2 AMP  
Raring Current: 2 AMP .  
接触阻抗: 20mΩ MAX.  
Contact Resistance: 20mΩ MAX .  
绝缘阻抗: 1000MΩMIN.  
Insulating Resistance: 1000MΩMIN.  
耐电压: AC 500V.  
Withstanding Voltage: AC 500V.  
温度范围: -40度至+105度  
Temperature Range: -40°Cto +105°C

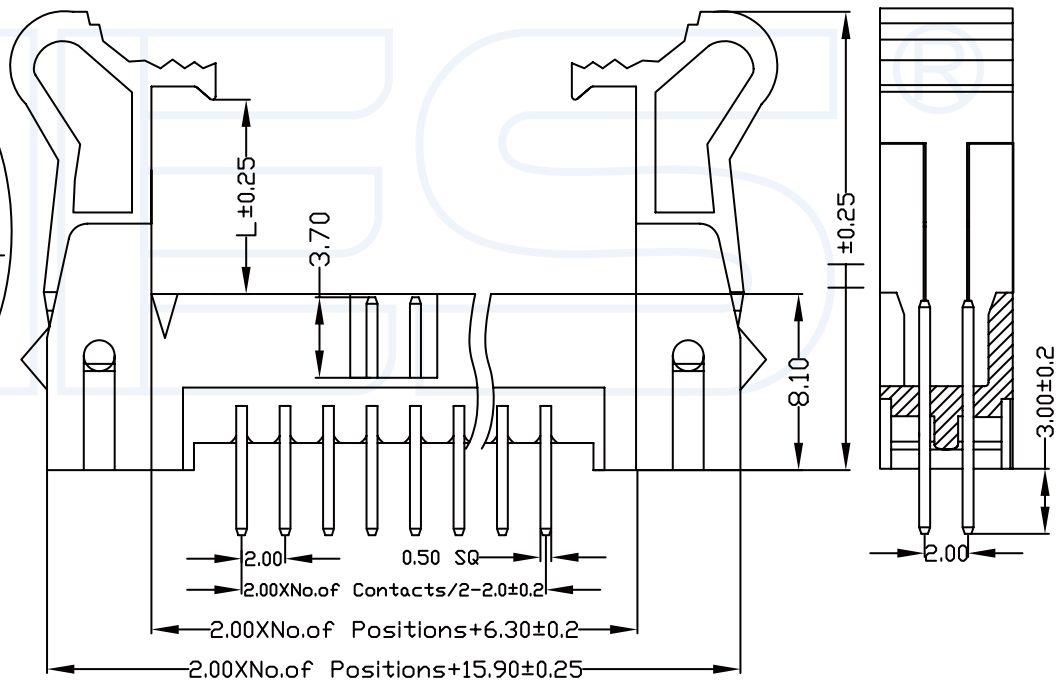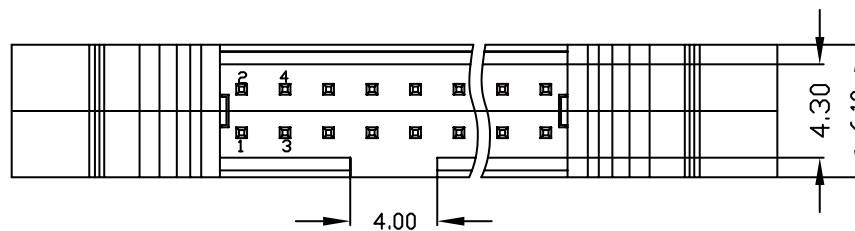

### ORDERING INFORMATION

**4501-1 XX XX X SX X 1**


NO.OF PINS  
PER ROW  
06-64P

INSULATOR  
MATERIAL  
B:PA6T  
C:PA9T  
D:LCP

PACKING Short Latch  
A:PE Bag  
B:TOPE&REED  
C:TUBE  
D:TUBE+CAP  
E:TRAY

CONTACT PLATING  
FULL OF GOLD SEMI-GOLD  
A0=0.8u" B0=0.8U"

.....  
A9=30u" B9=30U"  
S1=ORDINARY TIN PLATED  
S2=MATTE TIN PLATED  
S3=TIN-PLATED HIGH-TEMPERATURE

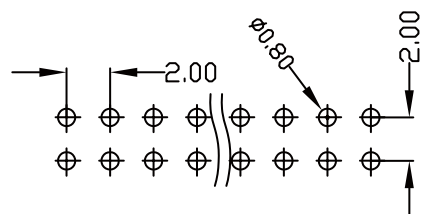

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

206-2.00mm 牛角180度

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

4501-1XXXXXSXX1

DRAWING NO:

1

2

3

4

5

6

7

8

9