

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)

胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PBT+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

#### 2-特性 (characteristics):



额定电流: 3 AMP  
 Raring Current: 3 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperture Range: -40°Cto +105°C

#### ORDERING INFORMATION

**66R- XX 2 36 XX A S N 1**

NO.OF PINS  
 PER ROW  
 04-20P

CONTACT PLATING  
 FULL OF GOLD SEMI-GOLD  
 A0=0.8u" B0=0.8u"  
 .... ..  
 A9=30u" B9=30u"  
 S1=ORDINARY TIN PLATED  
 S2=MATTE TIN PLATED  
 S3=TIN-PLATED HIGH-TEMPERATURE

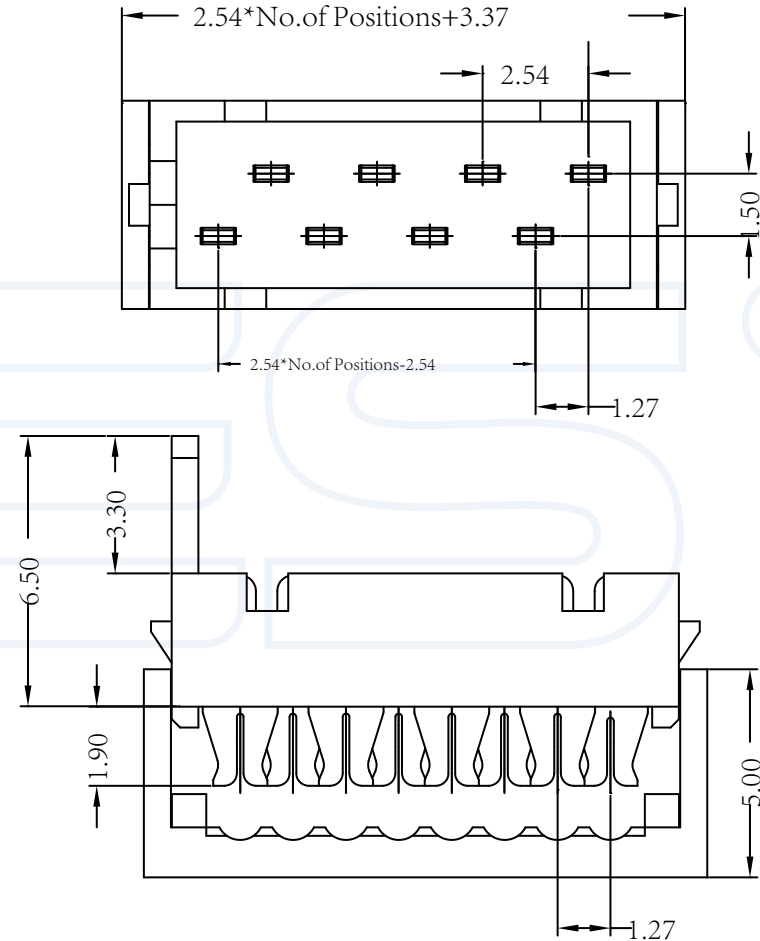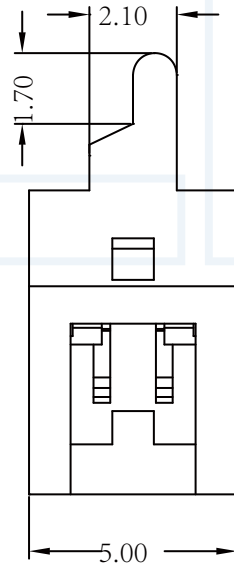

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

228-线端 IDC 两件式 180度无耳

DATE

2018-02-18

PROJECTON



REV

UNIT

SCALE

PAGE

PART NO:

66R-XX236XXASN1

DRAWING NO:

1 2 3 4 5 6 7 8 9