

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T/LCP UL94V-0, 颜色: 黑色
 Housing: PA9T/LCP UL94V-0, Color: Black
 四方针: 磷铜/镍底30u"MIN/表面镀金3u"MIN
 Contact: Brass/3u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL

2-特性 (characteristics):

额定电流: 0.5 AMP
 Raring Current: 0.5 AMP .
 接触阻抗: 30mΩ MAX.
 Contact Resistance: 30mΩ MAX .
 绝缘阻抗: 500MΩMIN.
 Insulating Resistance: 500MΩMIN.
 耐电压: AC 200V.
 Withstanding Voltage: AC 200V.
 温度范围: -30度至+80度
 Temperture Range: -30°Cto +80°C


ORDERING INFORMATION

BT08-M XX A0 A M C1

TYPE	NO:OF PINS	INSULATOR
F:FEMALE	PER ROW	MATERIAL
M:MALE	20-60P	A:PA9T
		B:LCP

CONTACT PLATING
 FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"

 A9=30u" B9=30U"
 S1=ORDINARY TIN PLATED
 S2=MATTE TIN PLATED
 S3=TIN-PLATED HIGH-TEMPERATURE

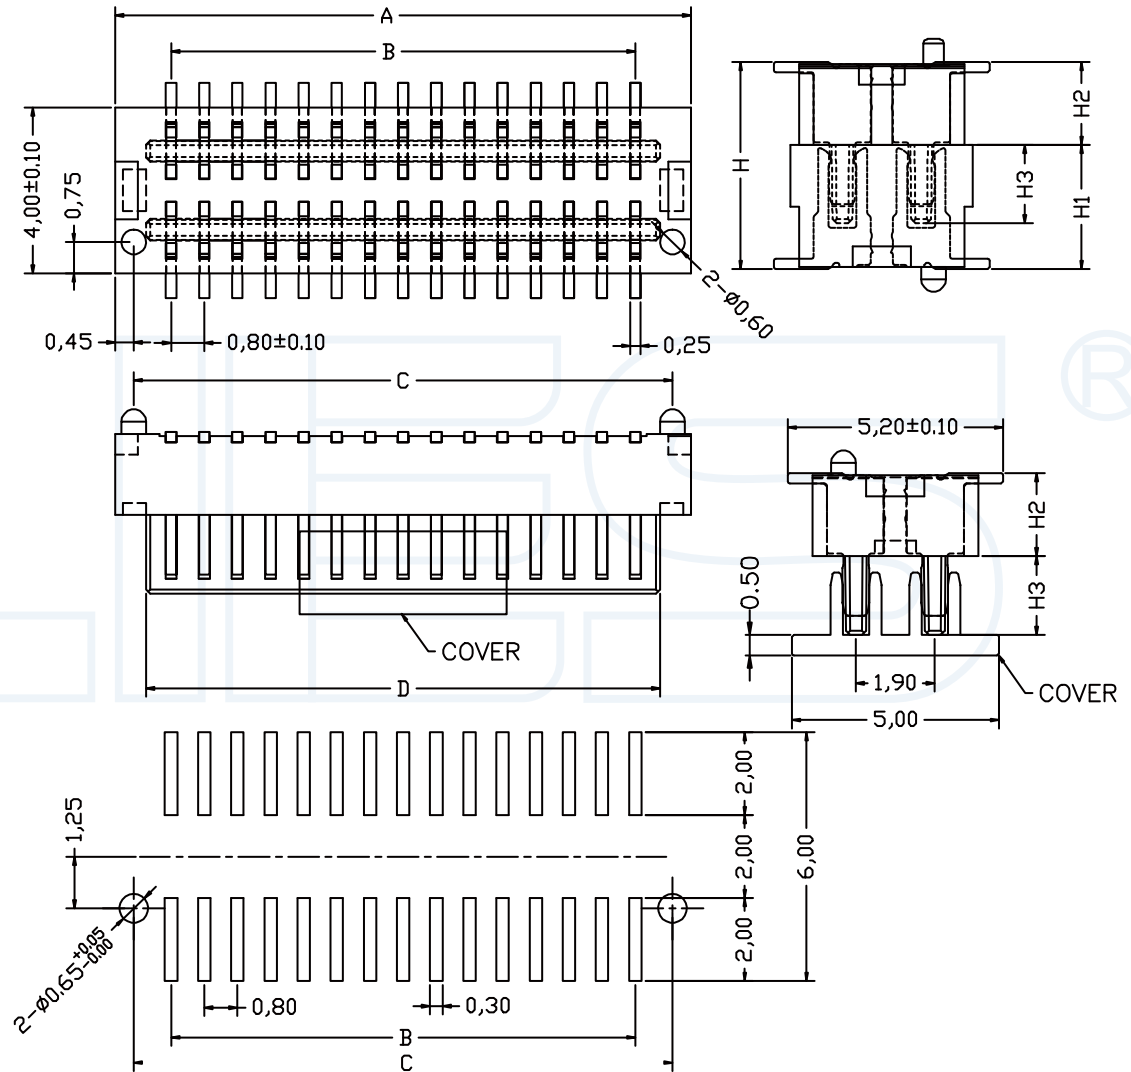

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE: 233-0.80mm 板对板 公座双槽 DATE: 2018-02-18

PART NO: BT08-MXXA0AMC1 DRAWING NO: