

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T/LCP UL94V-0, 颜色: 黑色
Housing: PA9T/LCP UL94V-0, Color: Black
四方针: 磷铜/镍底30u"MIN/表面镀金3u"MIN
Contact: Brass/3u"MIN GOLD PLATING
OVER ALL 30u"MIN NICKEL UNDERPLATING
OVER ALL

2-特性 (characteristics):


额定电流: 0.5 AMP
Raring Current: 0.5 AMP .
接触阻抗: 30mΩ MAX.
Contact Resistance: 30mΩ MAX .
绝缘阻抗: 500MΩMIN.
Insulating Resistance: 500MΩMIN.
耐电压: AC 200V.
Withstanding Voltage: AC 200V.
温度范围: -30度至+80度
Temperature Range: -30°C to +80°C

ORDERING INFORMATION

BT08- F XX A0 A M C1

TYPE	NO:OF PINS	INSULATOR
F:FEMALE	PER ROW	MATERIAL
M:MALE	20-60P	A:PA9T
		B:LCP

CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8U"
.....
A9=30u" B9=30U"
S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE

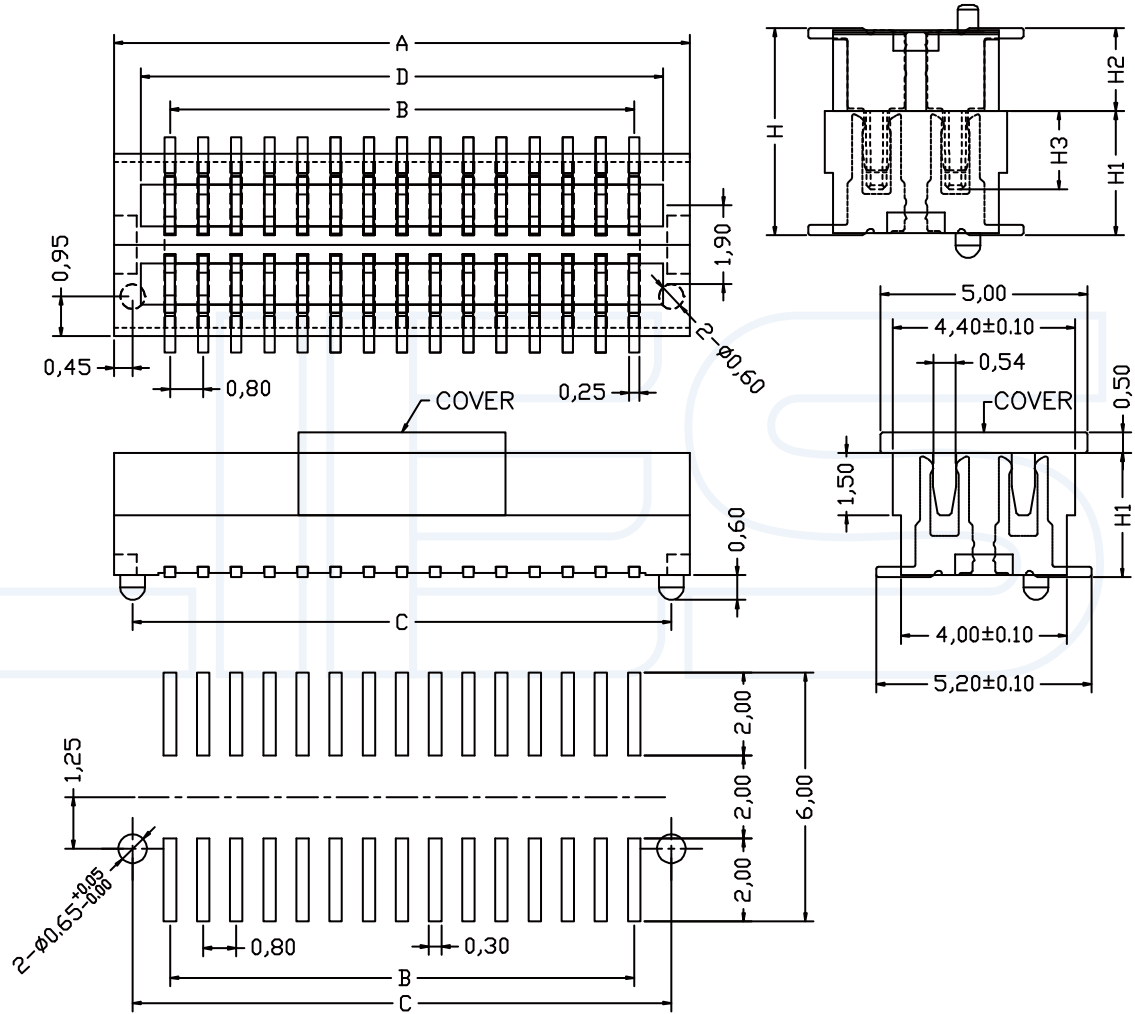

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

234-0.80mm 板对板 母座双槽

DATE

2018-02-18

PROJECTON



REV

UNIT

SCALE

PAGE

PART NO:

BT08-FXXA0AMC1

DRAWING NO: