

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)




胶芯: PBT+30%G. UL94V-0, 颜色: 黑色
 Housing: PPS+30%G. UL94V-0, Color: Black
 端子: 黄铜
 Contact: Brass CuZn 36Pb3 (C3600)
 相配针: ϕ 0.41mm
 Connecting Pin: ϕ 0.41mm

2-特性 (characteristics):

额定电流: 1.0 AMP
 Raring Current: 1.0AMP .
 接触阻抗: 10mΩ MAX.
 Contact Resistance: 10mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Dielectric strength: Min 1000V RMS

ORDERING INFORMATION

R1430-2 XX X X X S 100 1

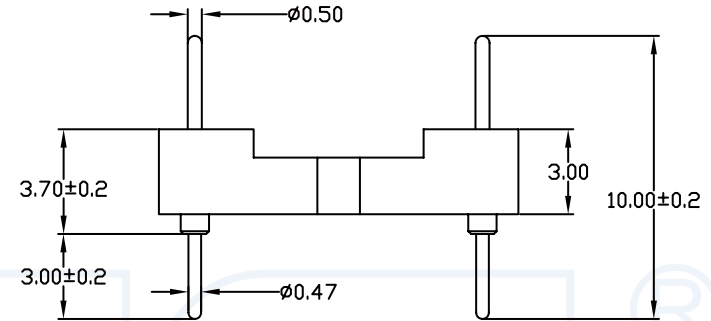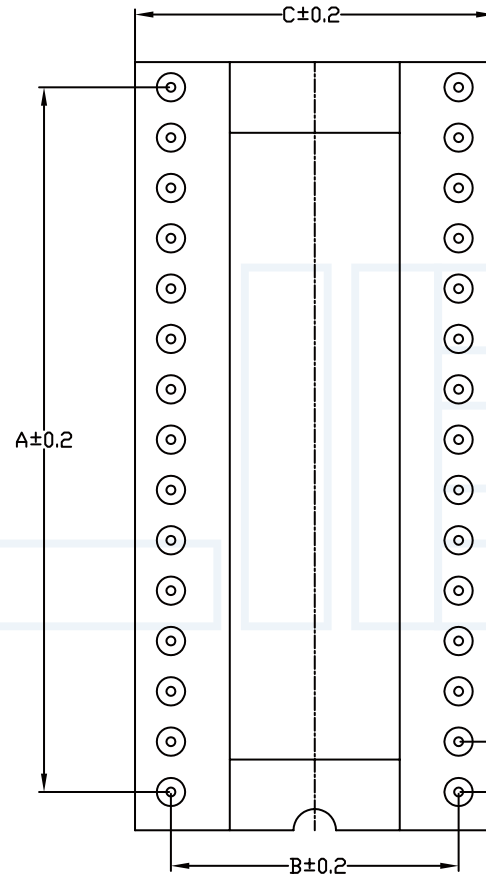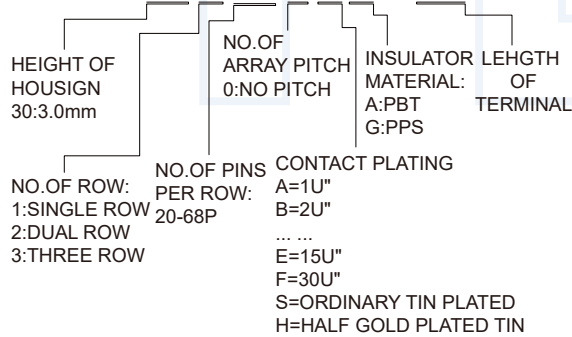

See page 33	No. of Positions	A	B	C
fig. 1	24	21.8	10.16	12.7
fig. 2	28	25.2	10.16	12.7
fig. 3	30	27.0	10.16	12.7
fig. 4	32	28.8	10.16	12.7
fig. 5	48	43.1	10.16	12.7
fig. 6	20	18.1	15.24	17.64
fig. 7	24	21.7	15.24	17.64
fig. 8	28	25.2	15.24	17.64
fig. 9	40	35.8	15.24	17.64
fig. 10	42	37.7	15.24	17.64
fig. 11	48	43.1	15.24	17.64
fig. 12	52	46.7	15.24	17.64
fig. 13	56	50.2	15.24	17.64
fig. 14	64	57.3	15.24	17.64
fig. 15	68	60.9	15.24	17.64
fig. 16	64	57.3	19.05	21.45

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 241-1.778mm 双排 圆孔排针 IC座 180度

DATE 2018-02-18

PROJECTON **REV** A **UNIT** mm **SCALE** 1:1 **PAGE** 1/1

PART NO: R1430-2XXXXXS100C1

DRAWING NO:

1 2 3 4 5 6 7 8 9