

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PPS+30%G. UL94V-0, 颜色: 黑色
Housing: PPS+30%G. UL94V-0, Color: Black
端子: 黄铜

Contact: Brass CuZn 36Pb3 (C3600)

相配针: $\phi 0.47\text{mm}$

Connecting Pin: $\phi 0.47\text{mm}$

2-特性 (characteristics):

额定电流: 3.00 AMP

Raring Current: 3.00 AMP .

接触阻抗: 10m Ω MAX.


Contact Resistance: 10m Ω MAX .

绝缘阻抗: 1000M Ω MIN.


Insulating Resistance: 1000M Ω MIN.

ORDERING INFORMATION

R1619-X XX X X G S XXX 1

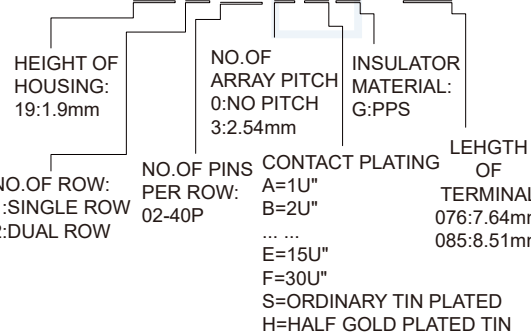


Stright pin connector ultralow
profile height1.9mm::solder tail
single row
Availability from:2 to 40 contacts
Standard number of contacts 20, 32,
and 40

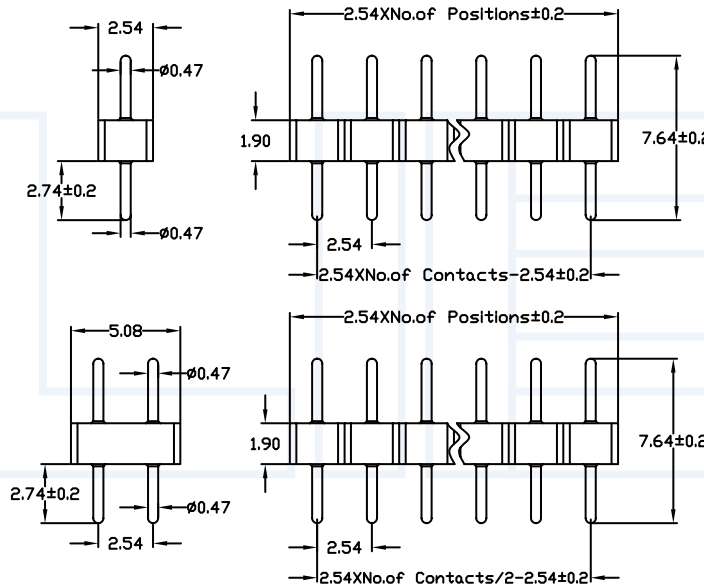

Stright pin connector ultralow
profile height2.16mm::solder tail
single row
Availability from:2 to 40 contacts
Standard number of contacts 20, 32,
and 40

Stright pin connector ultralow
profile height1.9mm:solder tail
double row
Availability from:4 to 80 contacts
Standard number of contacts 20, 56
and 72

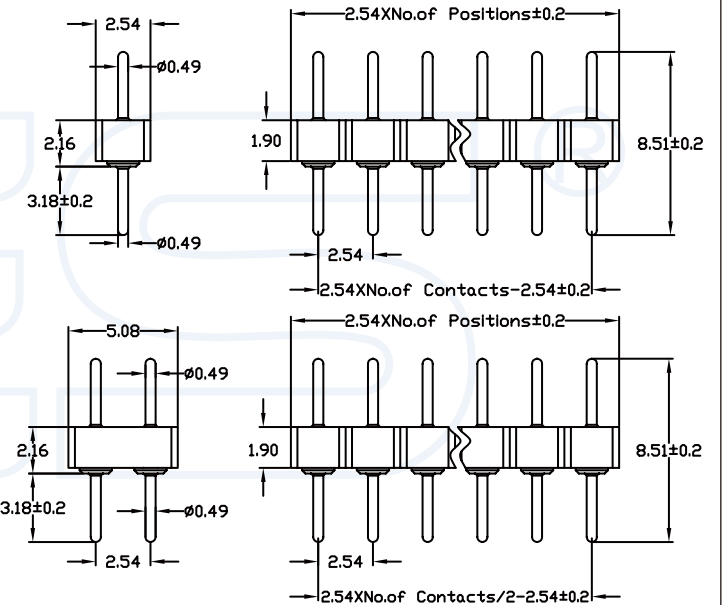

Stright pin connector ultralow
profile height2.16mm:solder tail
double row
Availability from:4 to 80 contacts
Standard number of contacts 20, 56
and 72

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON		REV	UNIT	SCALE	PAGE
		A	mm	1:1	1/1

TITLE

251-2.54mm 圆孔排针 180度

DATE

2018-02-18

PART NO:

R1619-XXXXXGSXXX1

DRAWING NO: