

1 2 3 4 5 6 7 8 9


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

Insulator:Black glass filled polyester
 PPS-GF30-FR
 Fiammability:UL94V-0
 Sleeve:Brass CuZn 36Pb3(36000)
 Contact clip(4 finger):Beryllium copper(C17200)
 Mating pin:Ø0.70 to 0.90mm or 0.635mmSQ
 Forces:(polished steel gauge Ø0.76mm)
 Insertion:1.2 N typ
 Withdrawal:0.6 N typ
 Mechancial life:min 500 cycles
 Rated current:3.0Amp
 Contact resistance:Max 10mΩ
 Dielectric resistance:Min 1000V RMS

Stright socket connector:solder tail
 single row
 Availability from:2 to 50 contacts
 Standard number of contacts 25 and
 50

Stright socket connector:solder tail
 double row
 Availability from:4 to 100 contacts
 Standard number of contacts 50 and
 100

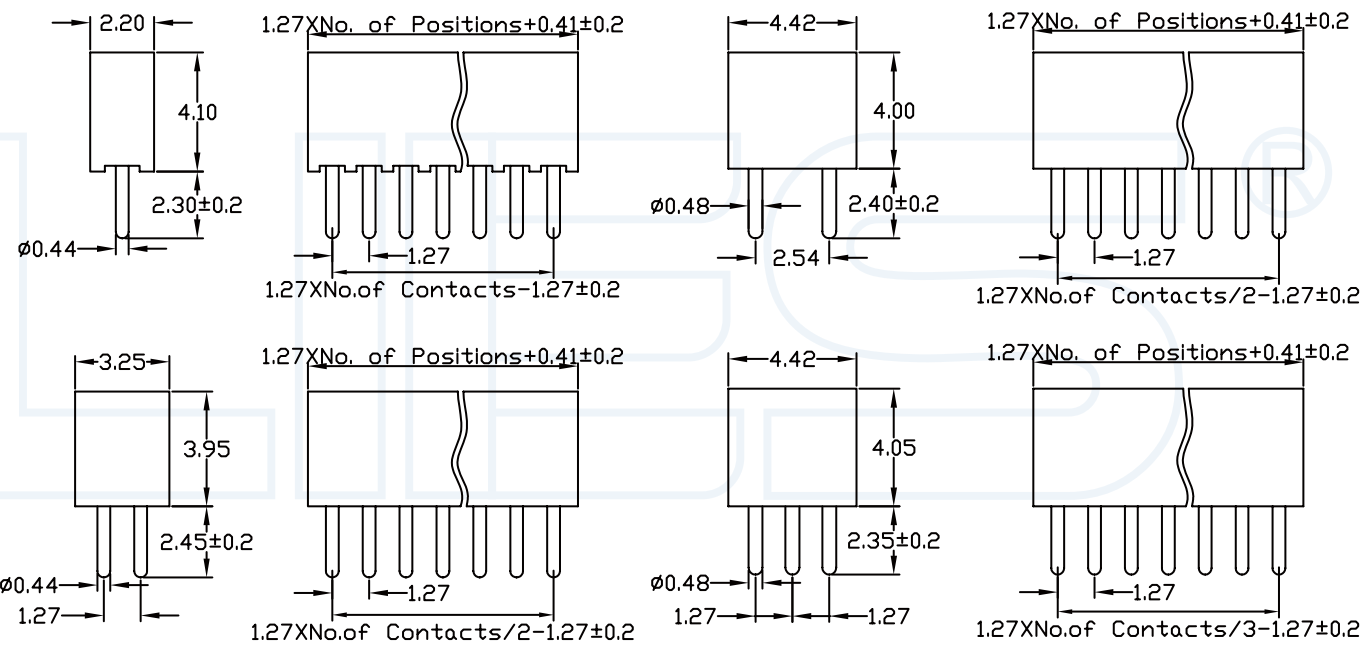

ORDERING INFORMATION

R23XX-X XX X XG S 064 1

HEIGHT OF HOUSING: 39:3.9mm 40:4.0mm 41:4.1mm	NO.OF ARRAY PITCH 0:NO PITCH 1:1.27 3:2.54	INSULATOR MATERIAL: G:PPS
NO.OF ROWS: 1:SINGLE ROW 2:DUAL ROW 3:THREE ROW	NO.OF PINS PER ROW: 02-50P	CONTACT PLATING A=1U" B=2U" E=15U" F=30U" S=ORDINARY TIN PLATED H=HALF GOLD PLATED TIN
		LENGTH OF TERMINAL

Stright socket connector:solder tail
 double row with 2.54mm rowto row
 distance
 Availability from:4 to 100 contacts
 Standard number of contacts 100

Stright socket connector:solder tail
 triple row
 Availability from:6 to 150 contacts
 Standard number of contacts 150

东莞市瑞翔精密连接器有限公司 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn	TITLE	263-1.27mm 圆孔排母 180度			DATE	2018-02-18			
	PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	R23XX-XXXXXGS0641	DRAWING NO:	
	A	mm	1:1	1/1					

1 2 3 4 5 6 7 8 9