

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric



**Specifications/备注 (Remark)**

Insulator:Black glass filled polyester  
 PPS-GF30-FR  
 Fiammability:UL94V-0  
 Sleeve:Brass CuZn 36Pb3(36000)  
 Contact clip(4 finger):Beryllium copper(C17200)  
 Mating pin:Ø0.70 to 0.90mm or 0.635mmSQ  
 Forces:(polished steel gauge Ø0.76mm)  
 Insertion:1.2 N typ  
 Withdrawal:0.6 N typ  
 Mechancial life:min 500 cycles  
 Rated current:3.0Amp  
 Contact resistance:Max 10mΩ  
 Dielectric resistance:Min 1000V RMS

**ORDERING INFORMATION**  
**R2528-X XX X XG S XXX 1**



HEIGHT OF HOUSING: 28:2.8mm  
 NO.OF ARRAY PITCH: 0:NO PITCH 2:2.0mm  
 INSULATOR MATERIAL: G:PPS  
 NO.OF ROWS: 1:SINGLE ROW 2:DUAL ROW  
 NO.OF PINS PER ROW: 02-40P  
 CONTACT PLATING LENGTH OF TERMINAL:  
 A=1U" 094:9.4mm  
 B=2U" 112:11.2mm  
 ... .. 147:14.7mm  
 E=15U"  
 F=30U"  
 S=ORDINARY TIN PLATED  
 H=HALF GOLD PLATED TIN

Stright socket connector heght  
 6.2mm:solder tail,doule row  
 Availability from:2 to 40 contacts  
 Standard number of contacts 40

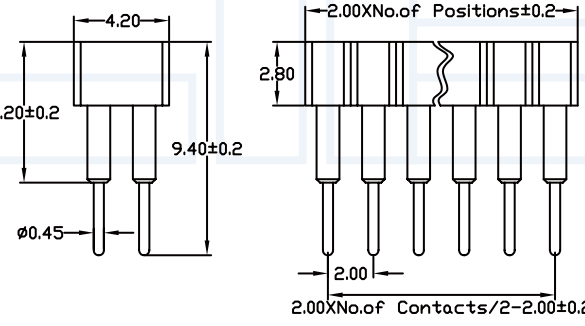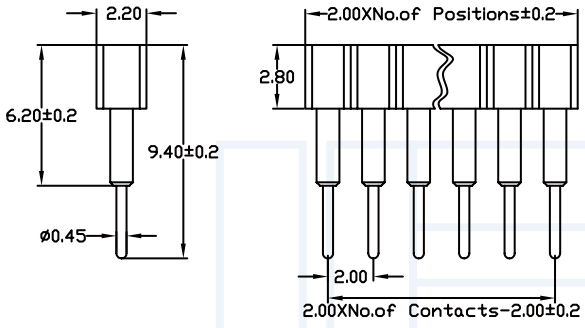

Stright socket connector leight  
 3.2mm:solder tail,single row  
 Availability from:1 to 40 contacts  
 Standard number of contacts 40

Stright socket connector heght  
 6.2mm:solder tail,doule row  
 Availability from:2 to 80 contacts  
 Standard number of contacts 80

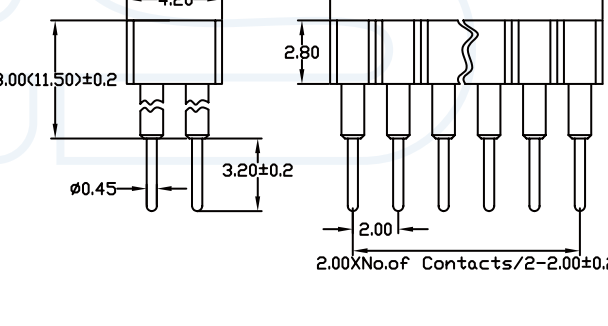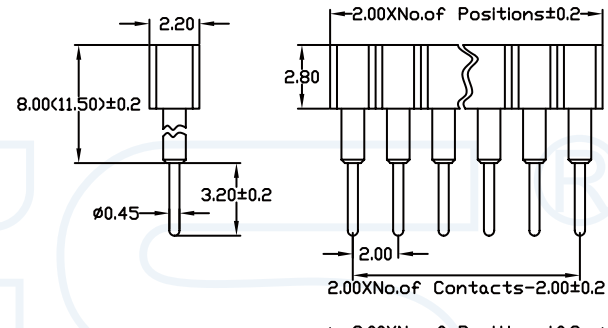

Stright socket connector leight  
 3.2mm:solder tail,single row  
 Availability from:2 to 80 contacts  
 Standard number of contacts 80

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 269-2.0mm 圆孔排母 180度 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R2528-XXXXXGXXXX1 DRAWING NO:

1 2 3 4 5 6 7 8 9