


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

Insulator:Black glass filled polyester
 PPS-GF30-FR
 Fiammability:UL94V-0
 Sleeve:Brass CuZn 36Pb3(36000)
 Contact clip(4 finger):Beryllium copper(C17200)
 Mating pin:Ø0.70 to 0.90mm or 0.635mmSQ
 Forces:(polished steel gauge Ø0.76mm)
 Insertion:1.2 N typ
 Withdrawal:0.6 N typ
 Mechancial life:min 500 cycles
 Rated current:3.0Amp
 Contact resistance:Max 10mΩ
 Dielectric resistance:Min 1000V RMS

Stright socket connector ultralow
 profile height2.4mm:solder tail
 single row
 Availability from:2 to 40 contacts
 Standard number of contacts 20, 32and
 40

Stright socket connectorultralow
 profile height2.4mm:solder tail
 double row
 Availability from:4 to 80 contacts
 Standard number of contacts 20, 56 and
 72

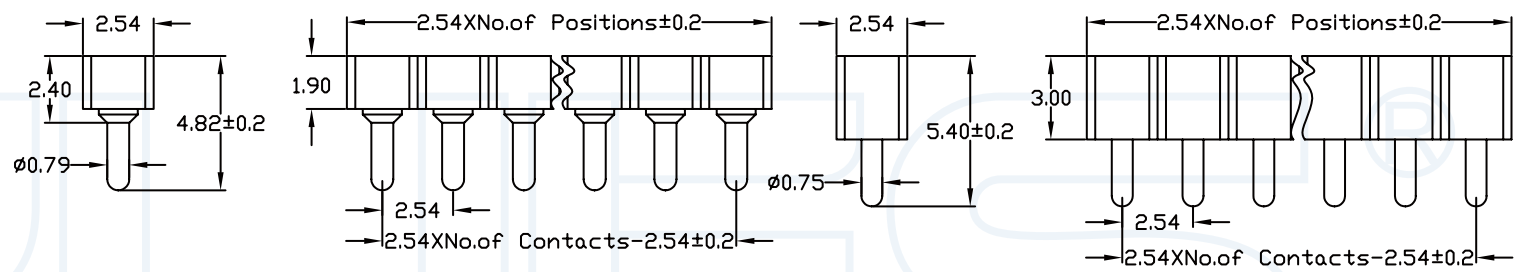

ORDERING INFORMATION R26XX-X XX X XG S XXX 1

HEIGHT OF HOUSING:
 19:1.9mm
 30:3.0mm

NO.OF ARRAY PITCH
 0:NO PITCH
 2:2.0mm


INSULATOR MATERIAL:
 G:PPS

NO.OF ROW:
 1:SINGLE ROW
 2:DUAL ROW

NO.OF PINS PER ROW:
 02-40P

CONTACT PLATING LENGTH OF TERMINAL
 A=1U"
 B=2U"

 E=15U"
 F=30U"
 S=ORDINARY TIN PLATED
 H=HALF GOLD PLATED TIN

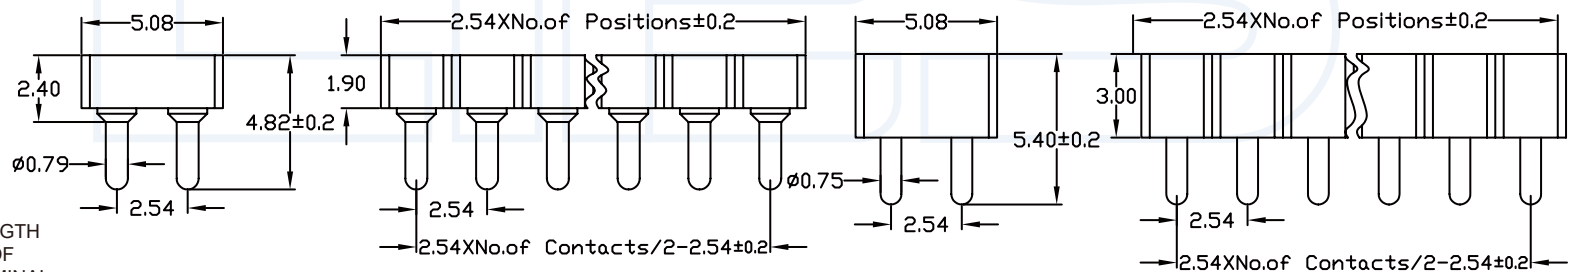

Stright socket connector ultralow
 profile height3mm:solder tail
 single row
 Availability from:1to 80 contacts
 Standard number of contacts 5, 6,
 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30,
 32 and 40

Stright socket connectorultralow
 profile height3.0mm:solder tail
 double row
 Availability from:2 to 80 contacts
 Standard number of contacts 20, 56, 60,
 and 72

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 272-2.54mm圆孔排母 180度 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R26XX-XXXXXGSXXX1 DRAWING NO: