

1 2 3 4 5 6 7 8 9


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

Insulator:Black glass filled polyester
 PPS-GF30-FR
 Fiammability:UL94V-0
 Sleeve:Brass CuZn 36Pb3(36000)
 Contact clip(4 finger):Beryllium copper(C17200)
 Mating pin:Ø0.70 to 0.90mm or 0.635mmSQ
 Forces:(polished steel gauge Ø0.76mm)
 Insertion:1.2 N typ
 Withdrawal:0.6 N typ
 Mechancial life:min 500 cycles
 Rated current:3.0Amp
 Contact resistance:Max 10mΩ
 Dielectric resistance:Min 1000V RMS

Right socket connector:solder tail
 single row
 Availability from:2 to 40 contacts
 Standard number of contacts 20, 25,
 32 and 40

Right socket connector:solder tail
 double row
 Availability from:4 to 80 contacts
 Standard number of contacts 20, 40,
 56, 60 and 72

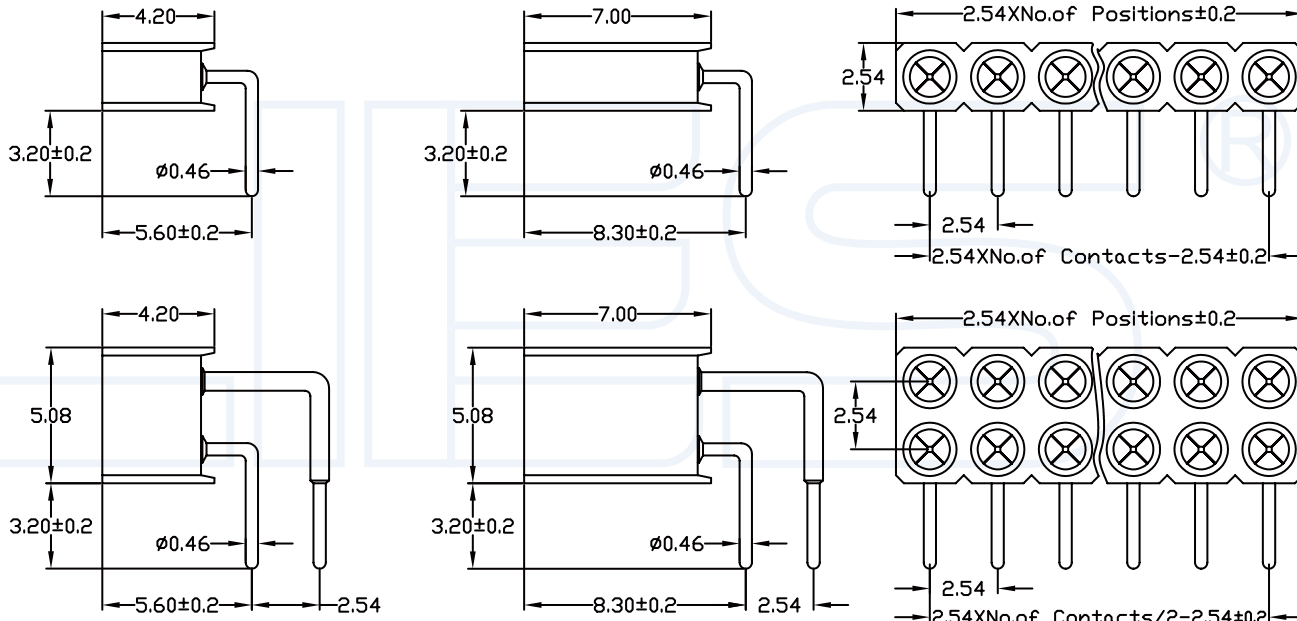

ORDERING INFORMATION
R26XX-X XX X X G R XXX1

HEIGHT OF HOUSING:
 42:4.2mm
 70:7.0mm

NO.OF ARRAY PITCH
 0:NO PITCH
 3:2.54mm

LENGTH OF TERMINAL
 098:9.80mm
 124:12.4mm

NO.OF ROW:
 1:SINGLE ROW PER ROW:
 2:DUAL ROW

NO.OF PINS
 01-40P

CONTACT PLATING
 A=1U"
 B=2U"

 E=15U"
 F=30U"
 S=ORDINARY TIN PLATED
 H=HALF GOLD PLATED TIN

Right socket connector:solder tail
 single row
 Availability from:2 to 40 contacts
 Standard number of contacts 20, 25,
 32 and 40

Right socket connector:solder tail
 double row
 Availability from:4 to 80 contacts
 Standard number of contacts 20, 40,
 56, 60 and 72

东莞市瑞翔精密连接器有限公司 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn	TITLE	280-2.54mm 圆孔排母 90度			DATE	2018-02-18		
	PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	R26XX-XXXXXGRXXX1	DRAWING NO:

1 2 3 4 5 6 7 8 9