


1 2 3 4 5 6 7 8 9

| ANGLE | ± 5°   | REV | LOCAS | DESCRIPTION | DESIGN   | DATE | 卫国峰  |
|-------|--------|-----|-------|-------------|----------|------|------|
| X.XXX | ± 0.05 | 01  |       |             | DRAWN    | DATE | 尚伟   |
| X.XX  | ± 0.15 | 02  |       |             | CHECKED  | DATE | 吴汉学  |
| X.X   | ± 0.25 | 03  |       |             | AUDITED  | DATE | 龚劲松  |
| X     | ± 0.50 | 04  |       |             | APPROVED | DATE | eric |

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色  
 Housing:PA6T+30%G. UL94V-0,Color:Black  
 端子: 黄铜  
 Contact: Brass


2-特性 (characteristics):  
 额定电流: 1.00 AMP  
 Raring Current:1.00 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance:20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance:1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage:AC 500V.  
 温度范围: -40度至+105度  
 Temperture Range: -40°Cto +105°C

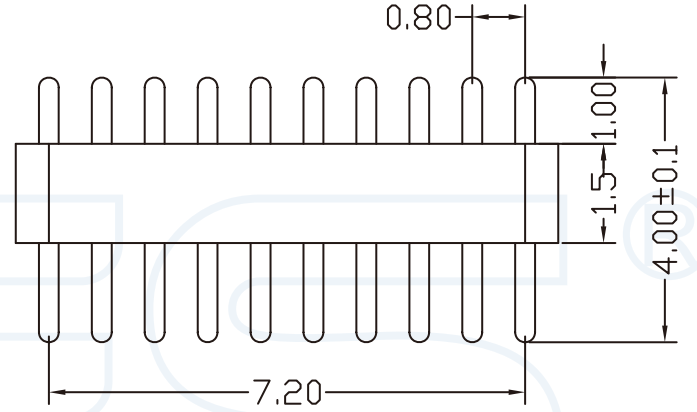

**ORDERING INFORMATION**  
**R1115-1 10 0 AC S 040 1**

CONTACT PLATING  
 A=1U"  
 B=2U"  
 ... ..  
 E=15U"  
 F=30U"  
 S=ORDINARY TIN PLATED  
 H=HALF GOLD PLATED TIN

INSULATOR MATERIAL  
 B:PA6T  
 C:PA9T  
 D:LCP

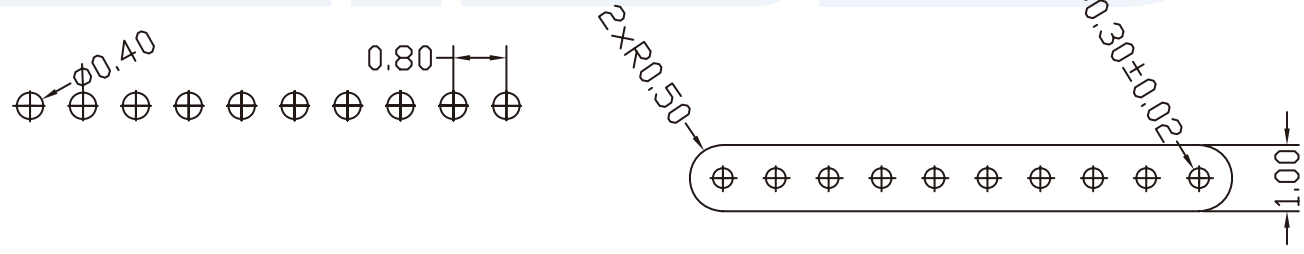

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 292-0.8mm 光纤连接器  
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: R1115-1100ACS0401 DRAWING NO:

1 2 3 4 5 6 7 8 9