



1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色  
 Housing: PA6T+30%G. UL94V-0, Color: Black  
 端子: 黄铜  
 Contact: Brass

2-特性 (characteristics):  
 额定电流: 1.00 AMP  
 Rating Current: 1.00 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperature Range: -40°C to +105°C

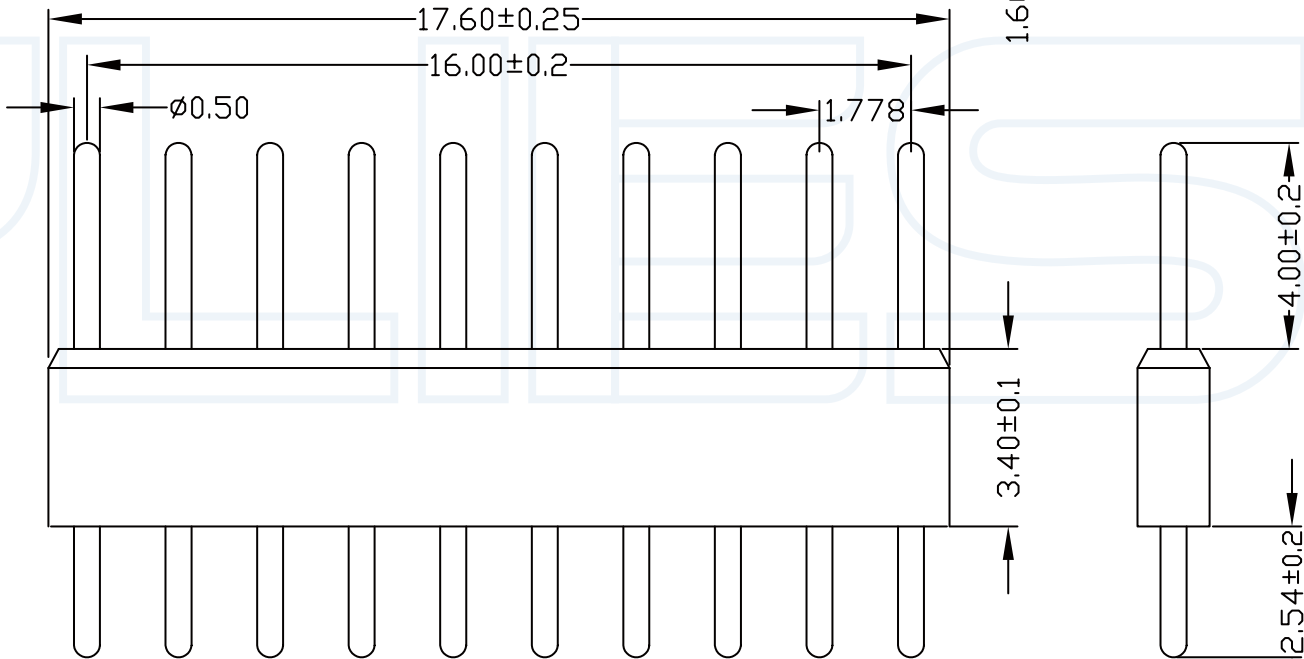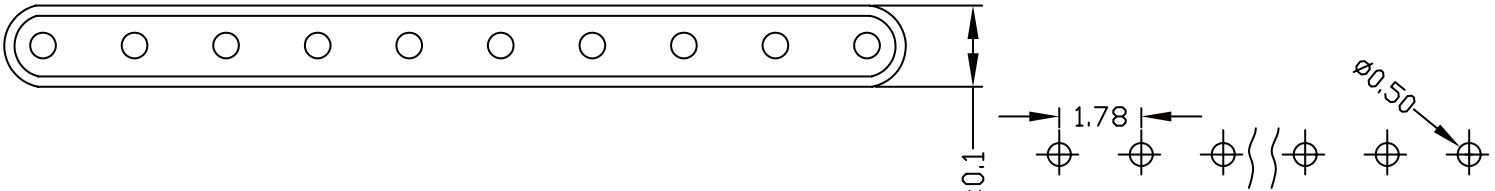

**ORDERING INFORMATION**  
**R14XX-1 10 0 XX S 099 1**

HEIGHT OF HOUSING:  
 34:3.4mm  
 40:4.05mm

CONTACT PLATING  
 A=1U"  
 B=2U"  
 ...  
 E=15U"  
 F=30U"  
 S=ORDINARY TIN PLATED  
 H=HALF GOLD PLATED TIN

INSULATOR MATERIAL  
 B:PA6T  
 C:PA9T  
 D:LCP

<b>东莞市瑞翔精密连接器有限公司</b> DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn	TITLE	297-1.778mm 光纤连接器			DATE	2018-02-18			
	PROJECTON	REV	UNIT	SCALE	PAGE	PART NO:	R14XX-1100XXS0991	DRAWING NO:	
	A	mm	1:1	1/1					

1 2 3 4 5 6 7 8 9