


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色
 Housing: PA6T+30%G. UL94V-0, Color: Black
 端子: 黄铜
 Contact: Brass
- 2-特性 (characteristics):
 额定电流: 1.00 AMP
 Raring Current: 1.00 AMP .
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX .
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperture Range: -40°Cto +105°C

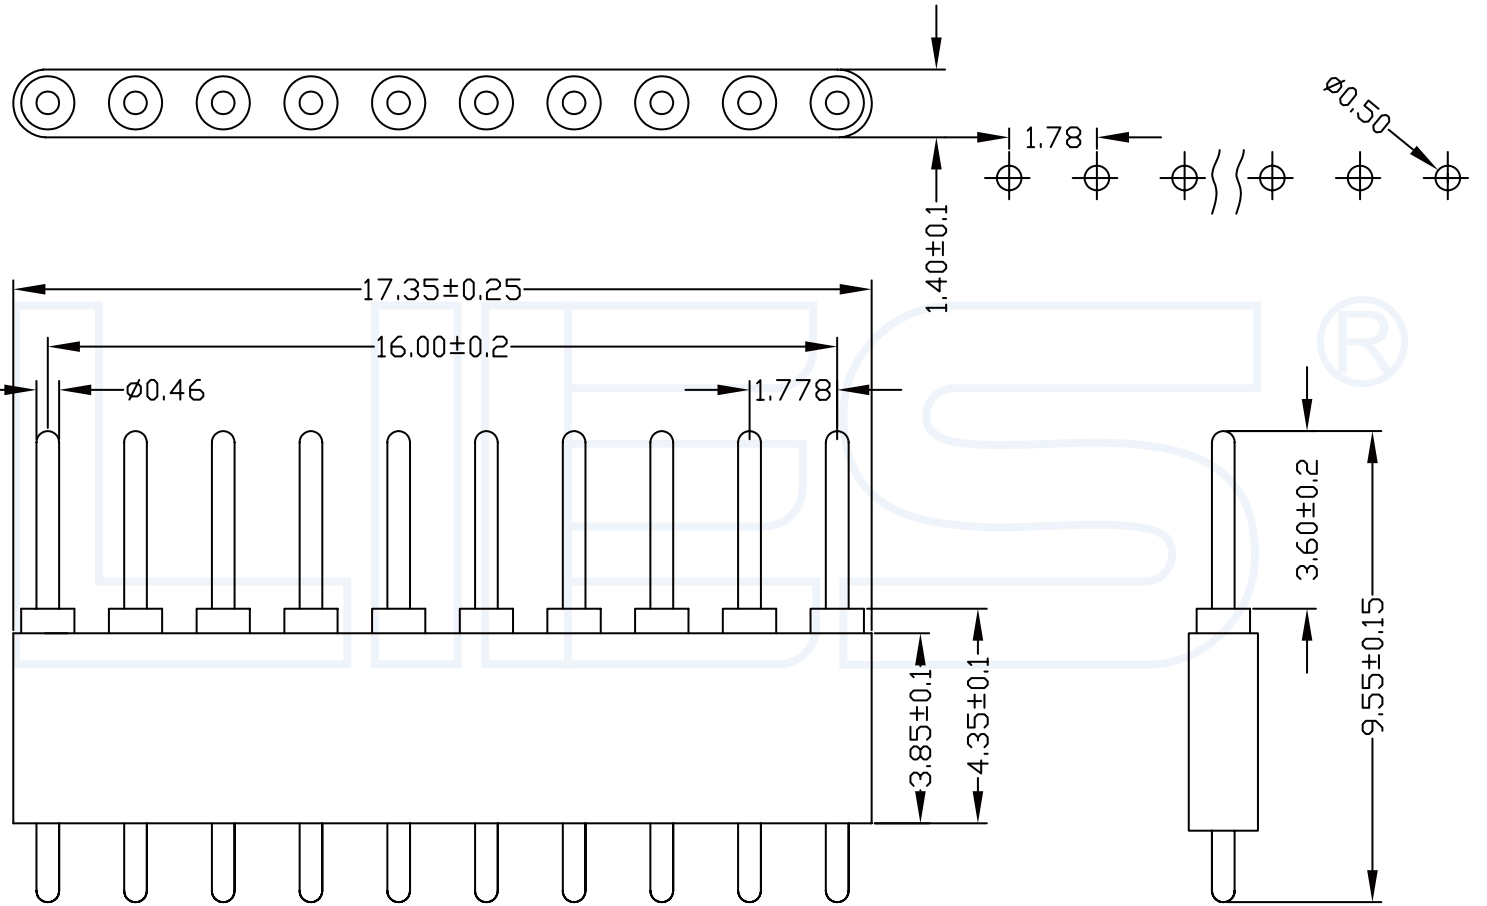

ORDERING INFORMATION
R1435-1 10 0 XX S 095 1

- | | |
|------------------------|--------------------|
| CONTACT PLATING | INSULATOR MATERIAL |
| A=1U" | B:PA6T |
| B=2U" | C:PA9T |
| | D:LCP |
| E=15U" | |
| F=30U" | |
| S=ORDINARY TIN PLATED | |
| H=HALF GOLD PLATED TIN | |

YLIES® 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

299-1.778mm 光纤连接器

DATE

2018-02-18

PROJECTON



REV A

UNIT mm

SCALE 1:1

PAGE 1/1

PART NO:

R1435-1100XXS0951

DRAWING NO:

1 2 3 4 5 6 7 8 9