
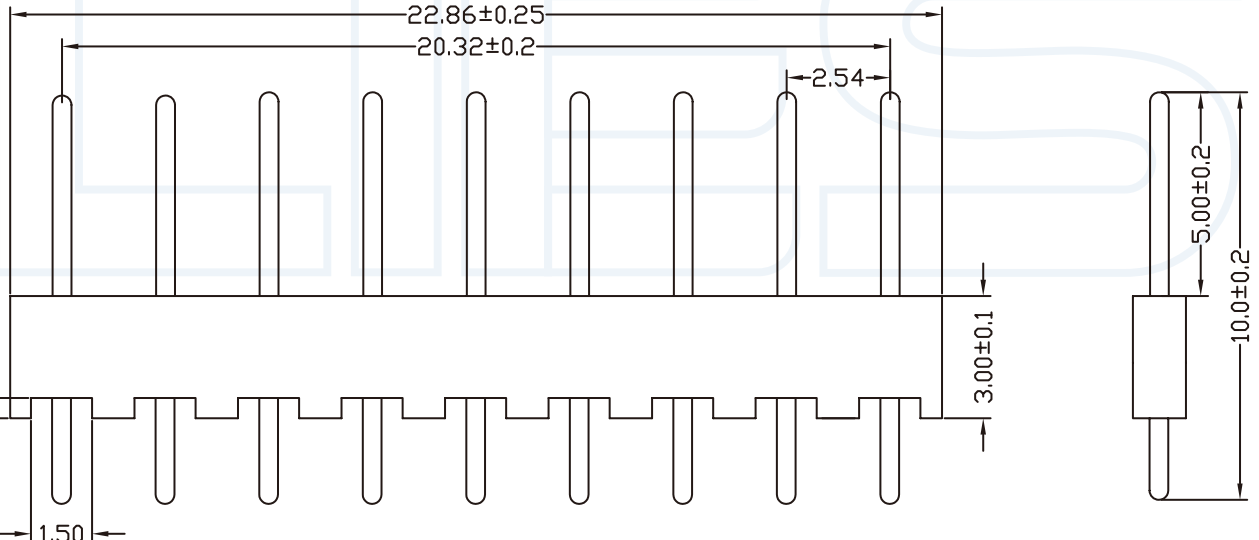


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA6T+30%G. UL94V-0, 颜色: 黑色  
 Housing: PA6T+30%G. UL94V-0, Color: Black  
 端子: 黄铜  
 Contact: Brass

2-特性 (characteristics):  
 额定电流: 3.00 AMP  
 Raring Current: 3.00 AMP .  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX .  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperture Range: -40°Cto +105°C

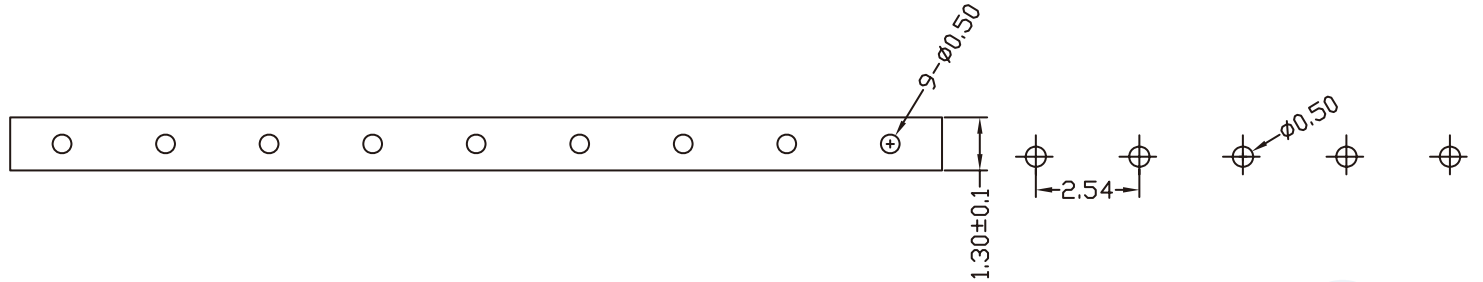

**ORDERING INFORMATION**  
**R1630-1 09 0 X X S 100 1**

HEIGHT OF HOUSING: 30:3.0mm

NO.OF PINS PER ROW: 01-40P

NO.OF ARRAY PITCH  
 0:NO PITCH  
 4:7.62mm  
 5:10.16mm  
 7:22.86mm

INSULATOR MATERIAL  
 A:PBT  
 B:PA6T

CONTACT PLATING  
 A=1U"  
 B=2U"  
 ...  
 E=15U"  
 F=30U"  
 S=ORDINARY TIN PLATED  
 H=HALF GOLD PLATED TIN

LENGTH OF TERMINAL

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 300-2.54mm 光纤连接器

DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: R1630-1090XXS1001

DRAWING NO: