

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP UL94V-0
Housing: LCP UL94V-0
端子: 磷青铜

Contact: Phosphor bronze


2-特性 (characteristics):

额定电压: 30V AC/DC .
Voltage Rating: 30V AC/DC .
额定电流: 0.2 AMP AC/DC .
Raring Current: 0.2 AMP AC/DC .
接触阻抗: 30mΩ MAX.
Contact Resistance: 30mΩ MAX .
绝缘阻抗: 100MΩMIN.
Insulating Resistance: 100MΩMIN.
耐电压: 200V AC/MINUTE
Withstanding Voltage: 200V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 06-08 P X X

NO.OF PINS Per Row 02-11P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 06:0.6mm	TYPE F=FEMALE M=MALE P=PIERCE	

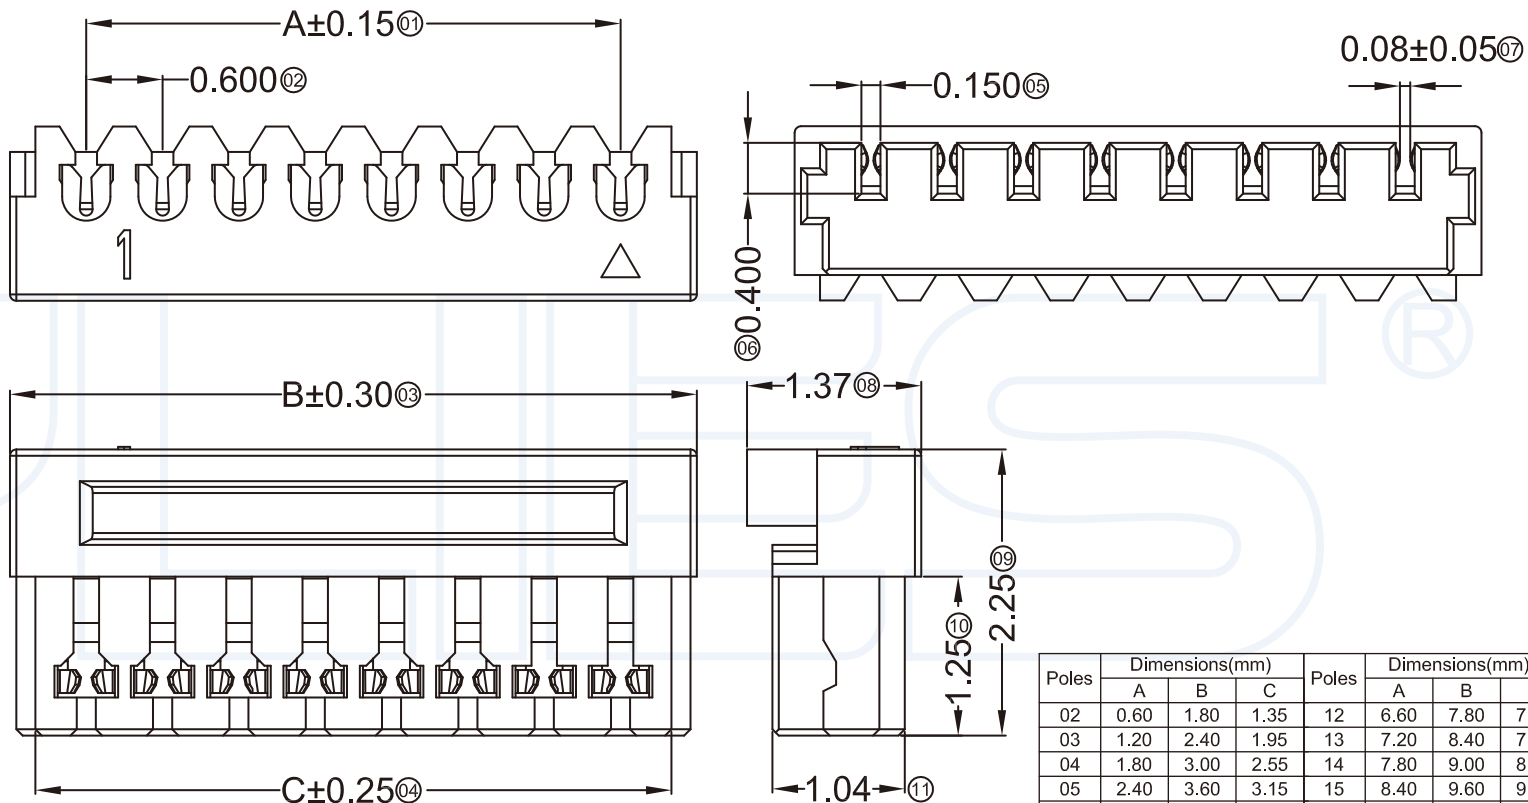

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.60	1.80	1.35	12	6.60	7.80	7.35
03	1.20	2.40	1.95	13	7.20	8.40	7.95
04	1.80	3.00	2.55	14	7.80	9.00	8.55
05	2.40	3.60	3.15	15	8.40	9.60	9.15
06	3.00	4.20	3.75	16	9.00	10.20	9.75
07	3.60	4.80	4.35	17	9.60	10.80	10.35
08	4.20	5.40	4.95	18	10.20	11.40	10.95
09	4.80	6.00	5.55	19	10.80	12.00	11.55
10	5.40	6.60	6.15	20	11.40	12.60	12.15
11	6.00	7.20	6.75	22	12.60	13.20	12.75

0600HI-XX-LPHF	LCP UL94V-0 Halogen Free(Black)	AWG#36/AWG#34	0.29mm(Max)	Phosphor Bronze	Tin-Plated	0600W
0600HI-XXG-LPHF	LCP UL94V-0 Halogen Free(Black)				Gold-Flash	
PART NO	Material	Wire Range	Insulation O.D.	Material(Terminal)	Finish(Terminal)	Mates With SWB Wafer

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

324-0.6mm 刺破式插座

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

H06-08PXX

DRAWING NO:

1

2

3

4

5

6

7

8

9