

1 2 3 4 5 6 7 8 9

| | | | | | | | |
|-------|--------|-----|-------|-------------|----------|------|------|
| ANGLE | ± 5° | REV | LOCAS | DESCRIPTION | DESIGN | DATE | 卫国峰 |
| X.XXX | ± 0.05 | 01 | | | DRAWN | DATE | 尚伟 |
| X.XX | ± 0.15 | 02 | | | CHECKED | DATE | 吴汉学 |
| X.X | ± 0.25 | 03 | | | AUDITED | DATE | 龚劲松 |
| X | ± 0.50 | 04 | | | APPROVED | DATE | eric |

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: LCP UL94V-0
 Housing:LCP UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电压: 125V AC/DC .
 Voltage Rating:125V AC/DC .
 额定电流: 1 AMP AC/DC .
 Raring Current:1 AMP AC/DC .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX .
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance:≥100MΩMIN.
 耐电压: 250V AC/MINUTE
 Withstanding Voltage:250V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

ORDERING INFORMATION


T08- XX X X

TERMINAL
 M:MALE
 F:FEMALE

SERLES NO
 080:0.8mm PACKING QTY

CONTACT PLATING
 FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"

 A9=30u" B9=30U"
 S1=ORDINARY TIN PLATED
 S2=MATTE TIN PLATED
 S3=TIN-PLATED HIGH-TEMPERATURE

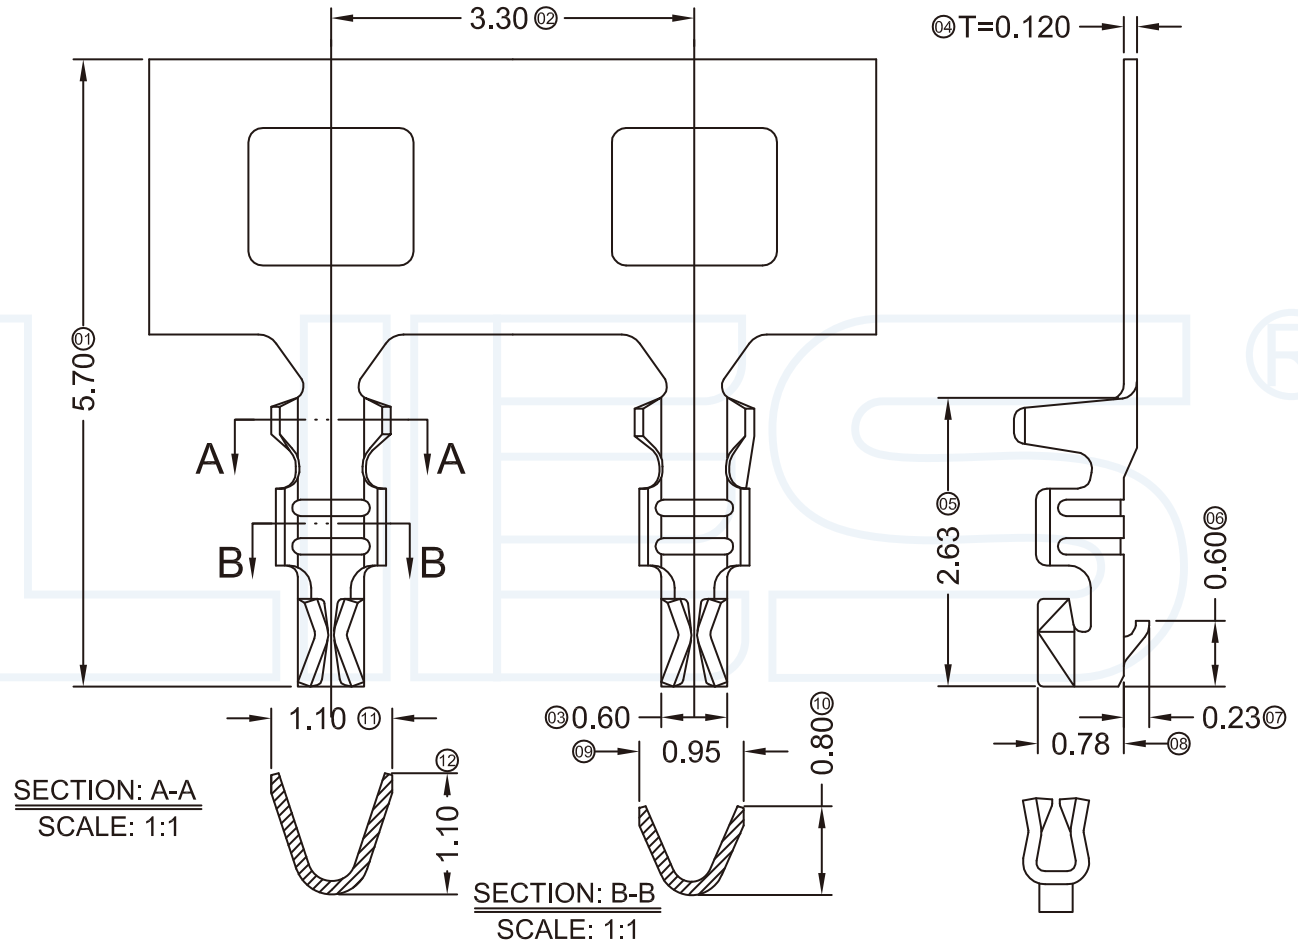

| | | | | | |
|-----------|-----------------|------------|-----------------|--|---------------------|
| 0800T-PSN | Phosphor Bronze | AWG#32 | 0.60mm(Max) | Stamping Before Plating:30u" Min Ni;70u"Sn Min | 0800H |
| PART NO | Material | Wire Range | Insulation O.D. | Finish | Used In SWB Housing |

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 328-0.80mm 端子 DATE: 2018-02-18

PROJECTON REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1 PART NO: T08-S1MC DRAWING NO:

1 2 3 4 5 6 7 8 9