

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP UL94V-0
Housing:LCP UL94V-0
端子: 磷青铜
Contact: Phosphor bronze


2-特性 (characteristics):

额定电压: 30V AC/DC .
Voltage Rating:30V AC/DC .
额定电流: 0.2 AMP AC/DC .
Raring Current:0.2 AMP AC/DC .
接触阻抗: 30mΩ MAX.
Contact Resistance:30mΩ MAX .
绝缘阻抗: 100MΩMIN.
Insulating Resistance:100MΩMIN.
耐电压: 200V AC/MINUTE
Withstanding Voltage:200V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 08-05 P X X

NO.OF PINS Per Row 02-11P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 08:0.8mm	TYPE F=FEMALE M=MALE P=PIERCE	

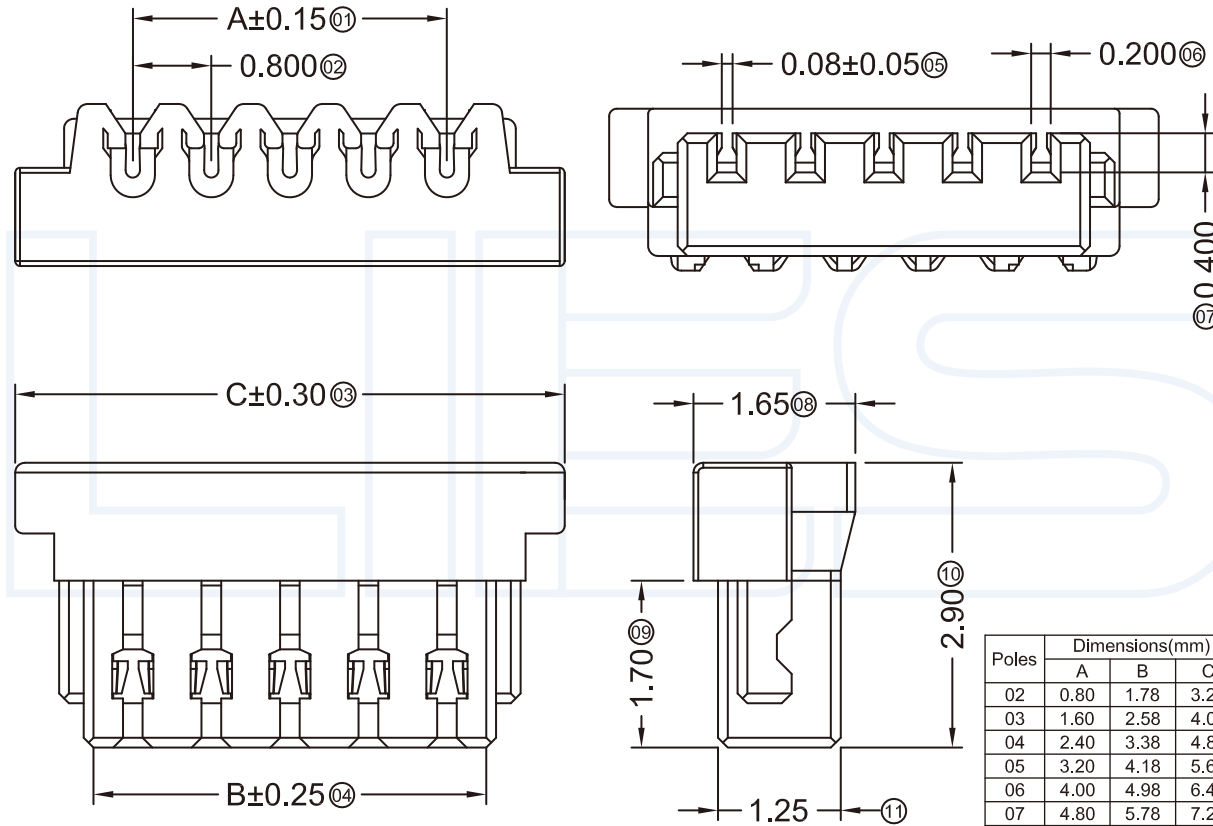

0800HI-XXEG-N0HF	PA66 UL 94V-0 Halogen Free	AWG#32-34	0.38mm(Max)	Phosphor Bronze	Gold-Flash	0800W
PART NO	Material	Wire Range	Insulation O.D.	Material(Terminal)	Finish(Terminal)	Mates With SWB Wafer

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

330-0.8mm 刺破式插座

DATE

2018-02-18

PROJECTON



REV

UNIT

SCALE

PAGE

PART NO:

H08-05PXX

DRAWING NO: