
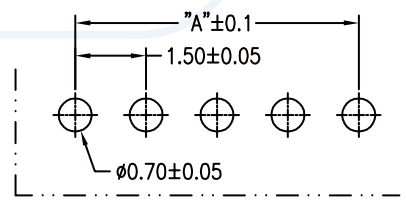
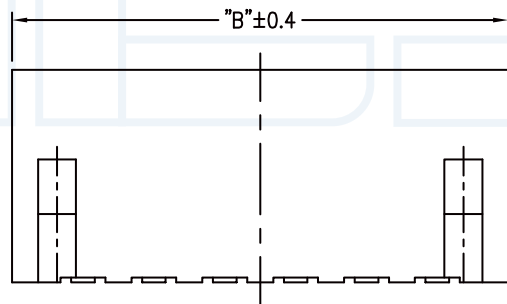
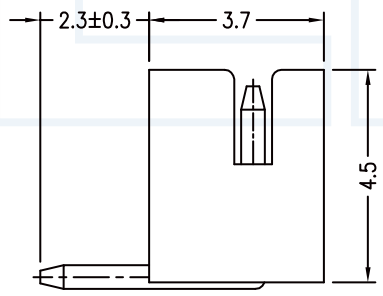


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA46 UL94V-0
 Housing:PA46 UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating:50V AC/DC .
 额定电流: 1 AMP (AWG #26-32) .
 Raring Current:1 AMP (AWG #26-32) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance:≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage:500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

Poles	DIM.A	DIM.B
2P	1.5	4.5
3P	3.0	6.0
4P	4.5	7.5
5P	6.0	9.0
6P	7.5	10.5
7P	9.0	12.0
8P	10.5	13.5
9P	12.0	15.0
10P	13.5	16.5
11P	15.0	18.0
12P	16.5	19.5
13P	18.0	21.0
14P	19.5	22.5
15P	21.0	24.0
16P	22.5	25.5

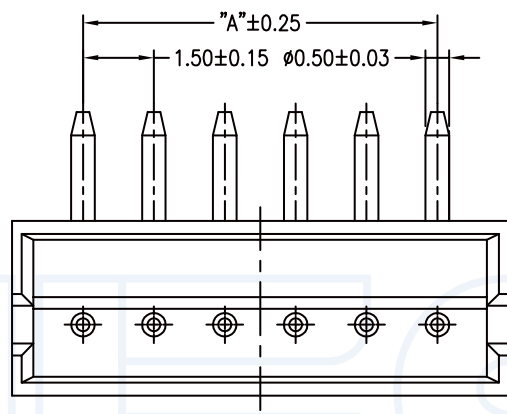

ORDERING INFORMATION

W15-XX XX X XX X

- | | | |
|---------------------------------|---|--|
| NO.OF PINS
Per Row
02-16P | INSULATOR
MATERIAL
A:PA46
B:PA66
C:PA9T
D:LCP | PACKING
A:PE Bag
B:TUBE
C:TRAY |
| SERLES NO
15:1.5mm | CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8U" | CONTACTL SHAPE
S: Straight
R: Right Angle
LT: STRAIGHT SMT
WT: RIGHT ANGLE SME |
|
A9=30u" B9=30U" | S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE | |

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 356-1.5mm 单排插针90度 (ZH) DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W15-06S1ARB DRAWING NO: