

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

端子: 磷青铜

Contact: Phosphor bronze

**2-特性 (characteristics):**

额定电压: 125V AC/DC .

Voltage Rating: 125V AC/DC .

额定电流: 1 AMP AC/DC .

Rating Current: 1 AMP AC/DC .

接触阻抗: ≤20mΩ MAX.

Contact Resistance: ≤20mΩ MAX .

绝缘阻抗: ≥100MΩMIN.

Insulating Resistance: ≥100MΩMIN.

耐电压: 250V AC/MINUTE


Withstanding Voltage: 250V AC/MINUTE

温度范围: -25度至+85度

Temperature Range: -25°C to +85°C

**ORDERING INFORMATION**

**T10-XX XX**

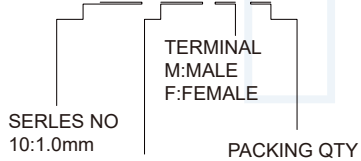

**CONTACT PLATING**

FULL OF GOLD SEMI-GOLD

A0=0.8u" B0=0.8U"


.....

A9=30u" B9=30U"

S1=ORDINARY TIN PLATED

S2=MATTE TIN PLATED

S3=TIN-PLATED HIGH-TEMPERATURE

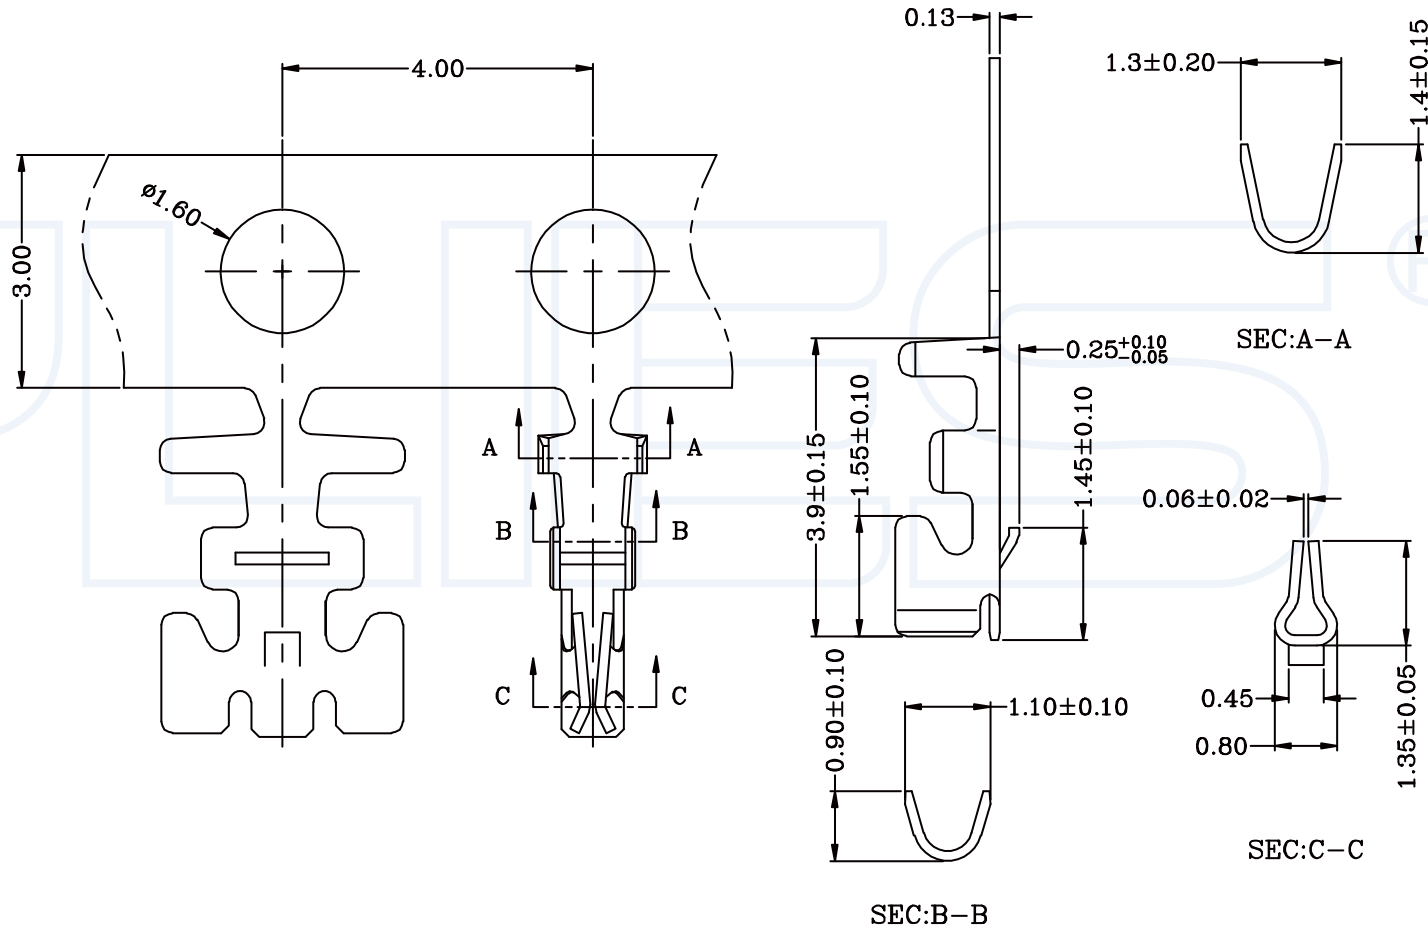

1

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel: 0769-85381995 / Fax: 0769-85493987 / Email: ylies@ylies.cn / Web: www.ylies.cn


TITLE

334-1.0mm 端子 (SH) -A

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

T10-S1XC

DRAWING NO:

1 2 3 4 5 6 7 8 9