
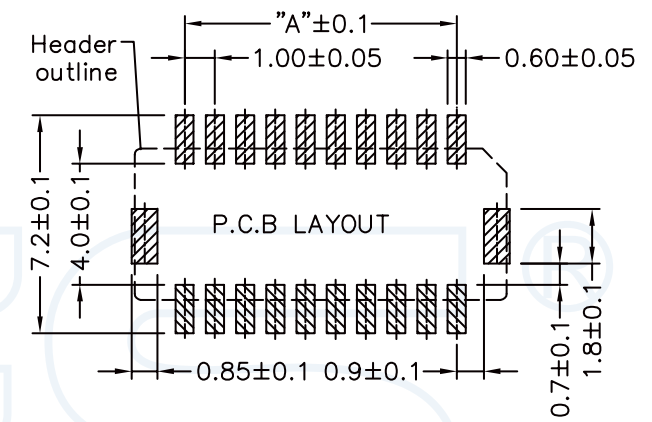
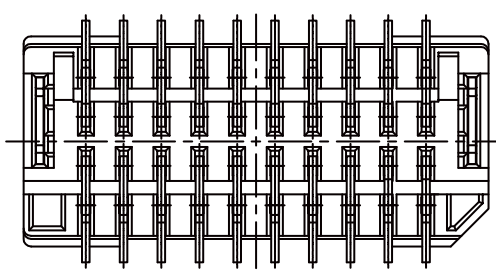
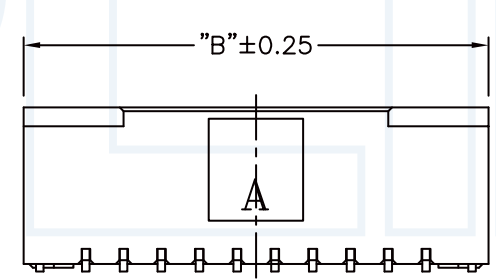


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

- 1-材料 (MATERIAL)**  
 胶芯: PA9T UL94V-0  
 Housing: PA9T UL94V-0  
 端子(焊片): 磷青铜(黄铜)  
 Contact (Solder Tab): Phosphor bronze(Brass)
- 2-特性 (characteristics):**  
 额定电压: 50V AC/DC .  
 Voltage Rating: 50V AC/DC .  
 额定电流: 1 AMP (AWG #28-32) .  
 Raring Current: 1 AMP (AWG #28-32) .  
 接触阻抗: ≤20mΩ MAX.  
 Contact Resistance: ≤20mΩ MAX.  
 绝缘阻抗: ≥100MΩMIN.  
 Insulating Resistance: ≥100MΩMIN.  
 耐电压: 500V AC/MINUTE  
 Withstanding Voltage: 500V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°Cto +85°C

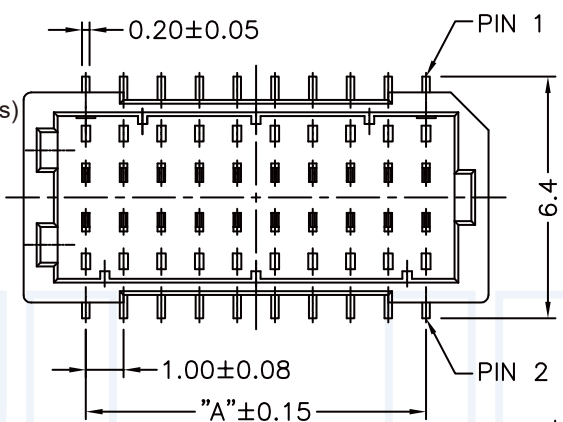

### ORDERING INFORMATION

**W10-XX XX X XX X**

NO.OF PINS Per Row 02-25P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 10:1.0mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U"	CONTACT SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME
.... A9=30u" B9=30U"	.... S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	

Poles	DIM.A	DIM.B
2×5P	4.0	7.3
2×6P	5.0	8.3
2×8P	7.0	10.3
2×10P	9.0	12.3
2×15P	14.0	17.3
2×20P	19.0	22.3
2×25P	24.0	27.3

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 335-1.0mm 立贴 双排插针(SHD)-A

DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV A	UNIT mm	SCALE 1:1	PAGE 1/1	PART NO: W10-XXXXCLTB	DRAWING NO:
-----------	-------	---------	-----------	----------	-----------------------	-------------