



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
端子: 磷青铜
Contact: Phosphor bronze
- 2-特性 (characteristics):
额定电压: 125V AC/DC .
Voltage Rating: 125V AC/DC .
额定电流: 1 AMP (AWG #30-32) .
Raring Current: 1 AMP (AWG #30-32) .
接触阻抗: ≤20mΩ MAX.
Contact Resistance: ≤20mΩ MAX .
绝缘阻抗: ≥100MΩMIN.
Insulating Resistance: ≥100MΩMIN.
耐压: 250V AC/MINUTE
Withstanding Voltage: 250V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

T10- XX X X

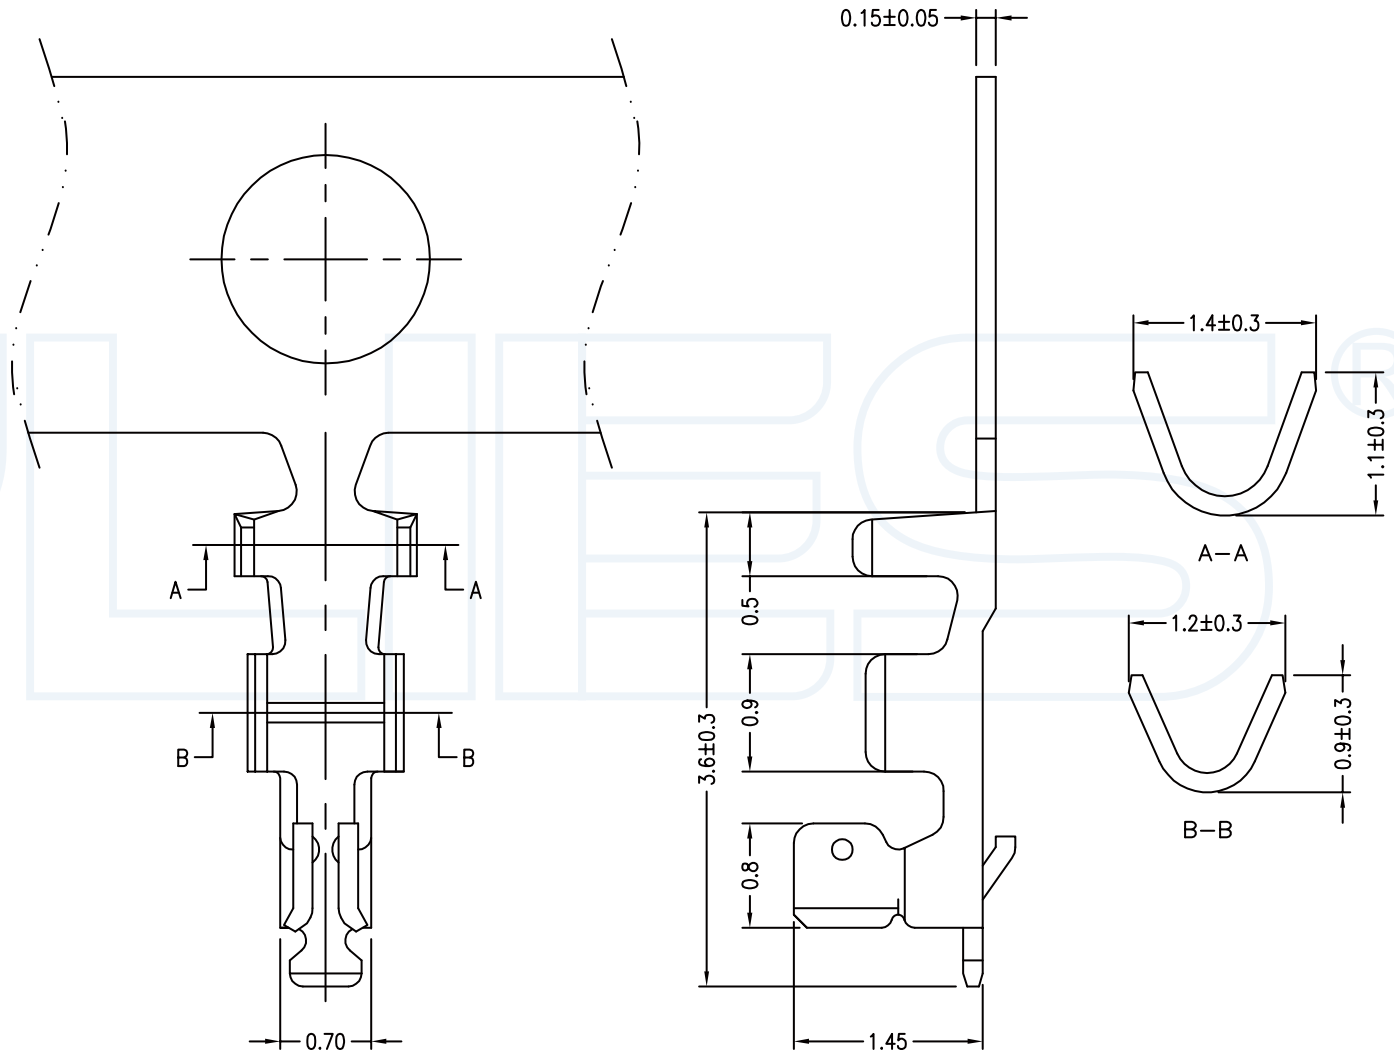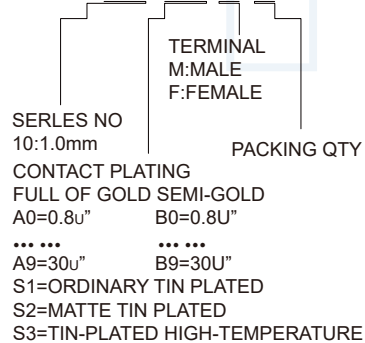

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel: 0769-85381995 / Fax: 0769-85493987 / Email: ylies@ylies.cn / Web: www.ylies.cn

TITLE: 339-1.0mm 端子 (SH) -B DATE: 2018-02-18

PROJECTON: REV: A UNIT: mm SCALE: 1:1 PAGE: 1/1 PART NO: T10-S1XC DRAWING NO: