

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric






Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA9T UL94V-0
 Housing: PA9T UL94V-0
 端子 (焊片): 磷青铜
 Contact (Solder Tab): Phosphor bronze

2-特性 (characteristics):
 额定电压: 50V AC/DC
 Voltage Rating: 50V AC/DC
 额定电流: 1 AMP (AWG #28-32)
 Raring Current: 1 AMP (AWG #28-32)
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance: ≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage: 500V AC/MINUTE
 温度范围: -40度至+85度
 Temperture Range: -40°Cto +85°C

ORDERING INFORMATION
W125-XX XX X XX X

NO.OF PINS Per Row 02-16P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 125:1.25mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" A9=30u" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	CONTACT SHAPE LT:STRAIGHT SMT WT:RIGHT ANGLE SME

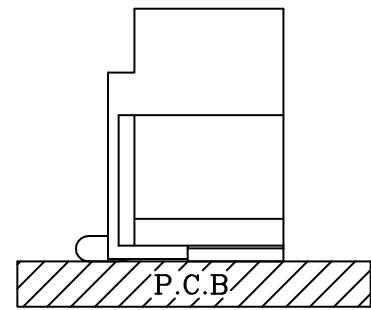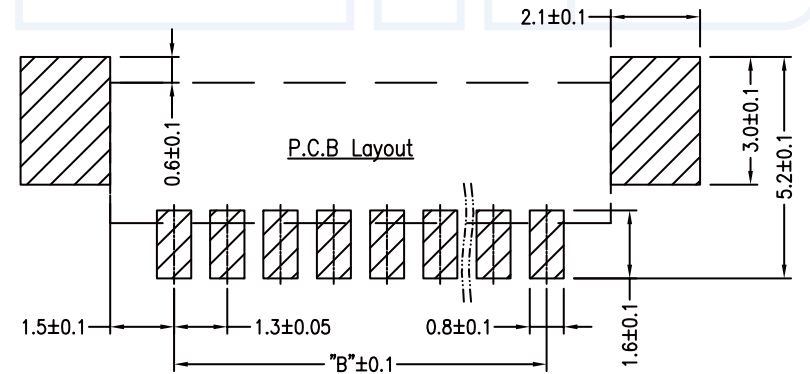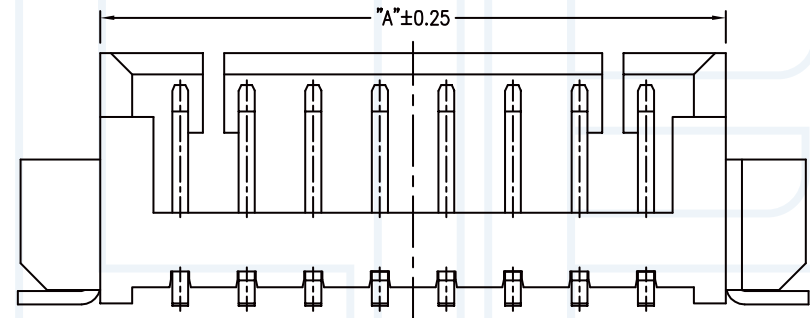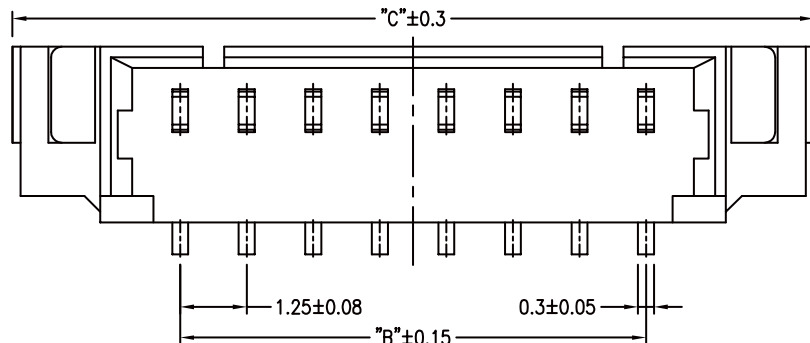

Poles	DIM.A	DIM.B	DIM.C
2	4.25	1.25	7.55
3	5.50	2.50	8.80
4	6.75	3.75	10.05
5	8.00	5.00	11.30
6	9.25	6.25	12.55
7	10.50	7.50	13.80
Poles	DIM.A	DIM.B	DIM.C
8	11.75	8.75	15.05
9	13.00	10.00	16.30
10	14.25	11.25	17.55
11	15.50	12.50	18.80
12	16.75	13.75	20.05
13	18.00	15.00	21.30
Poles	DIM.A	DIM.B	DIM.C
14	19.25	16.25	22.55
15	20.50	17.50	23.80
16	21.75	18.75	25.05

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 342-1.25mm 单排插针立贴 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: W125-XXXXCLTB DRAWING NO:

1 2 3 4 5 6 7 8 9