

1 2 3 4 5 6 7 8 9





ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing: PA66 UL94V-0
- 2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating: 50V AC/DC .
 额定电流: 1 AMP (AWG #28-30) .
 Raring Current: 1 AMP (AWG #28-30) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance: ≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage: 500V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 125-XX F X X

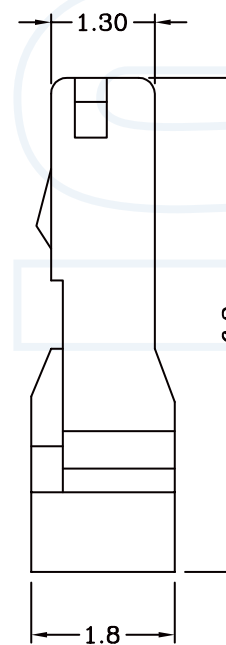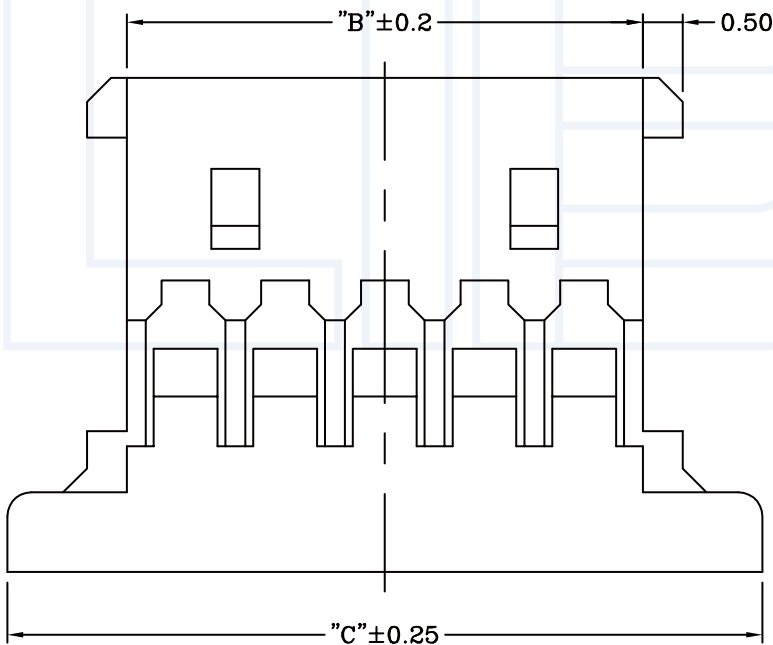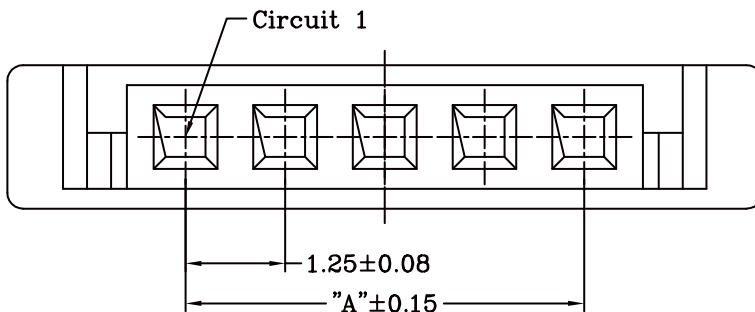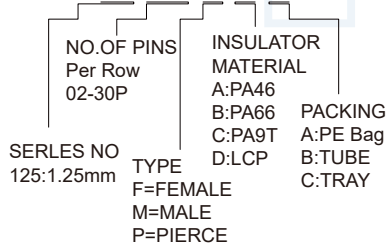

	DIM.A	DIM.B	DIM.C
2Y	1.25	2.72	5.72
3Y	2.50	3.97	6.97
4Y	3.75	5.22	8.22
5Y	5.00	6.47	9.47
6Y	6.25	7.72	10.72
7Y	7.50	8.97	11.97
8Y	8.75	10.22	13.22
9Y	10.00	11.47	14.47
10Y	11.25	12.72	15.72
11Y	12.50	13.97	16.97
12Y	13.75	15.22	18.22
13Y	15.00	16.47	19.47
14Y	16.25	17.72	20.72
15Y	17.50	18.97	21.97
20Y	23.75	25.22	28.22
30Y	36.25	37.72	40.72

4

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

349-1.25mm 胶壳单排

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

H125-05FBA

DRAWING NO:

1 2 3 4 5 6 7 8 9