

1 2 3 4 5 6 7 8 9





ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Poles	DIM.A	DIM.B	DIM.C
2P	1.25	3.65	1.90
3P	2.50	4.90	3.10
4P	3.75	6.15	4.25
5P	5.00	7.40	4.25
6P	6.25	8.65	6.25
7P	7.50	9.90	6.25
8P	8.75	11.15	6.25
9P	10.00	12.40	6.25
10P	11.25	13.65	8.20
11P	12.50	14.90	8.20
12P	13.75	16.15	8.20
13P	15.00	17.40	8.20
14P	16.25	18.65	8.20
15P	17.50	19.90	8.20

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing:PA66 UL94V-0

2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating:50V AC/DC .
 额定电流: 1 AMP (AWG #28-30) .
 Raring Current:1 AMP (AWG #28-30) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX.
 绝缘阻抗: ≥100MΩMIN.
 Insulating Resistance:≥100MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage:500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

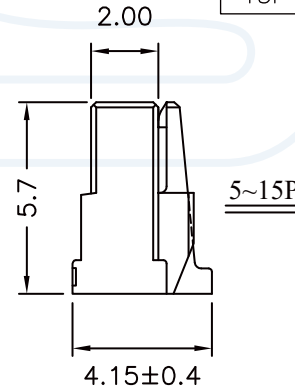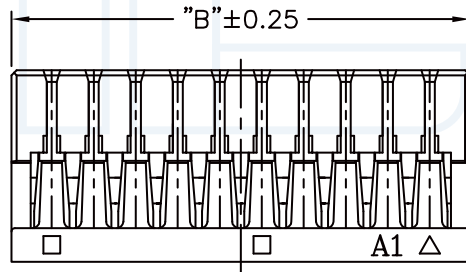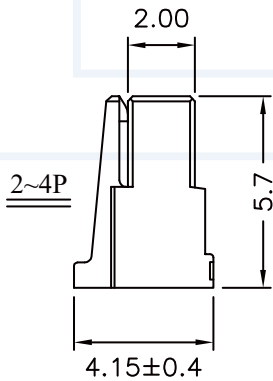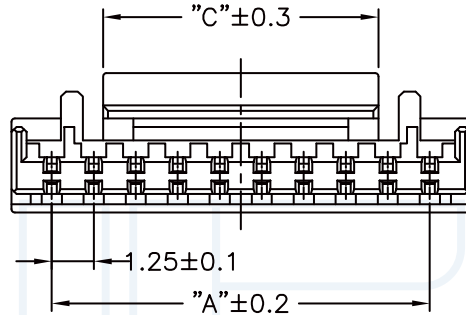

ORDERING INFORMATION

H 125-XX F X X

NO.OF PINS Per Row 02-15P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 125:1.25mm	TYPE F=FEMALE M=MALE P=PIERCE	

7

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 353-1.25mm 胶壳单排-C DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: H125-XXFBA DRAWING NO:

1 2 3 4 5 6 7 8 9