

1 2 3 4 5 6 7 8 9


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Part no	A	B
250-2A	2.50	7.30
250-3A	5.00	9.80
250-4A	7.50	12.3
250-5A	10.0	14.8
250-6A	12.5	17.3
250-7A	15.0	19.8
250-8A	17.5	22.3
250-9A	20.0	24.8
250-10A	22.5	27.3
250-11A	25.0	29.8
250-12A	27.5	32.3
250-13A	30.0	34.8
250-14A	32.5	37.3
250-15A	35.0	39.8

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA66 UL94V-0  
 Housing:PA66 UL94V-0  
 端子: 黄铜  
 Contact: Brass

2-特性 (characteristics):  
 额定电压: 250V AC/DC .  
 Voltage Rating:250V AC/DC .  
 额定电流: 3 AMP (AWG #22-28) .  
 Raring Current:3 AMP (AWG #22-28) .  
 接触阻抗: ≤20mΩ MAX.  
 Contact Resistance:≤20mΩ MAX.  
 绝缘阻抗: ≥1000MΩMIN.  
 Insulating Resistance:≥1000MΩMIN.  
 耐电压: 1000V AC/MINUTE  
 Withstanding Voltage:1000V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°Cto +85°C

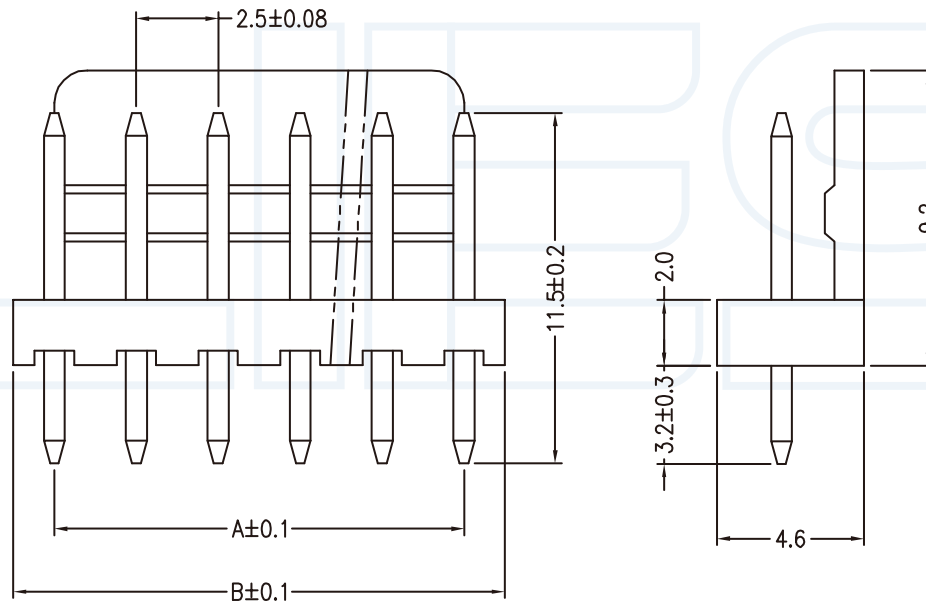

**ORDERING INFORMATION**  
**W254-XX XX X XX X**

NO.OF PINS Per Row 02-15P  
 SERLES NO 254:2.54mm  
 CONTACT PLATING FULL OF GOLD SEMI-GOLD  
 A0=0.8u" B0=0.8U" ...  
 A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE

INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP  
 CONTACT SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME

PACKING A: PE Bag B: TUBE C: TRAY

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 387-2.54mm 单排插针180度 带靠背 DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: W254-XXS1BSA DRAWING NO:

1 2 3 4 5 6 7 8 9