

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

- 1-材料 (MATERIAL)  
端子: 磷青铜  
Contact: Phosphor bronze
- 2-特性 (characteristics):  
额定电压: 250V AC/DC .  
Voltage Rating:250V AC/DC .  
额定电流: 3 AMP (AWG #22-28) .  
Rating Current:3 AMP (AWG #22-28) .  
接触阻抗: ≤20mΩ MAX.  
Contact Resistance:≤20mΩ MAX .  
绝缘阻抗: ≥1000MΩMIN.  
Insulating Resistance:≥1000MΩMIN.  
耐电压: 1000V AC/MINUTE  
Withstanding Voltage:1000V AC/MINUTE  
温度范围: -25度至+85度  
Temperature Range: -25°Cto +85°C

**ORDERING INFORMATION**


**T254- XX X X**

SERLES NO  
254:2.54mm

CONTACT PLATING  
FULL OF GOLD SEMI-GOLD  
A0=0.8u" B0=0.8U"  
... ..  
A9=30u" B9=30U"  
S1=ORDINARY TIN PLATED  
S2=MATTE TIN PLATED  
S3=TIN-PLATED HIGH-TEMPERATURE

TERMINAL  
M:MALE  
F:FEMALE

PACKING QTY

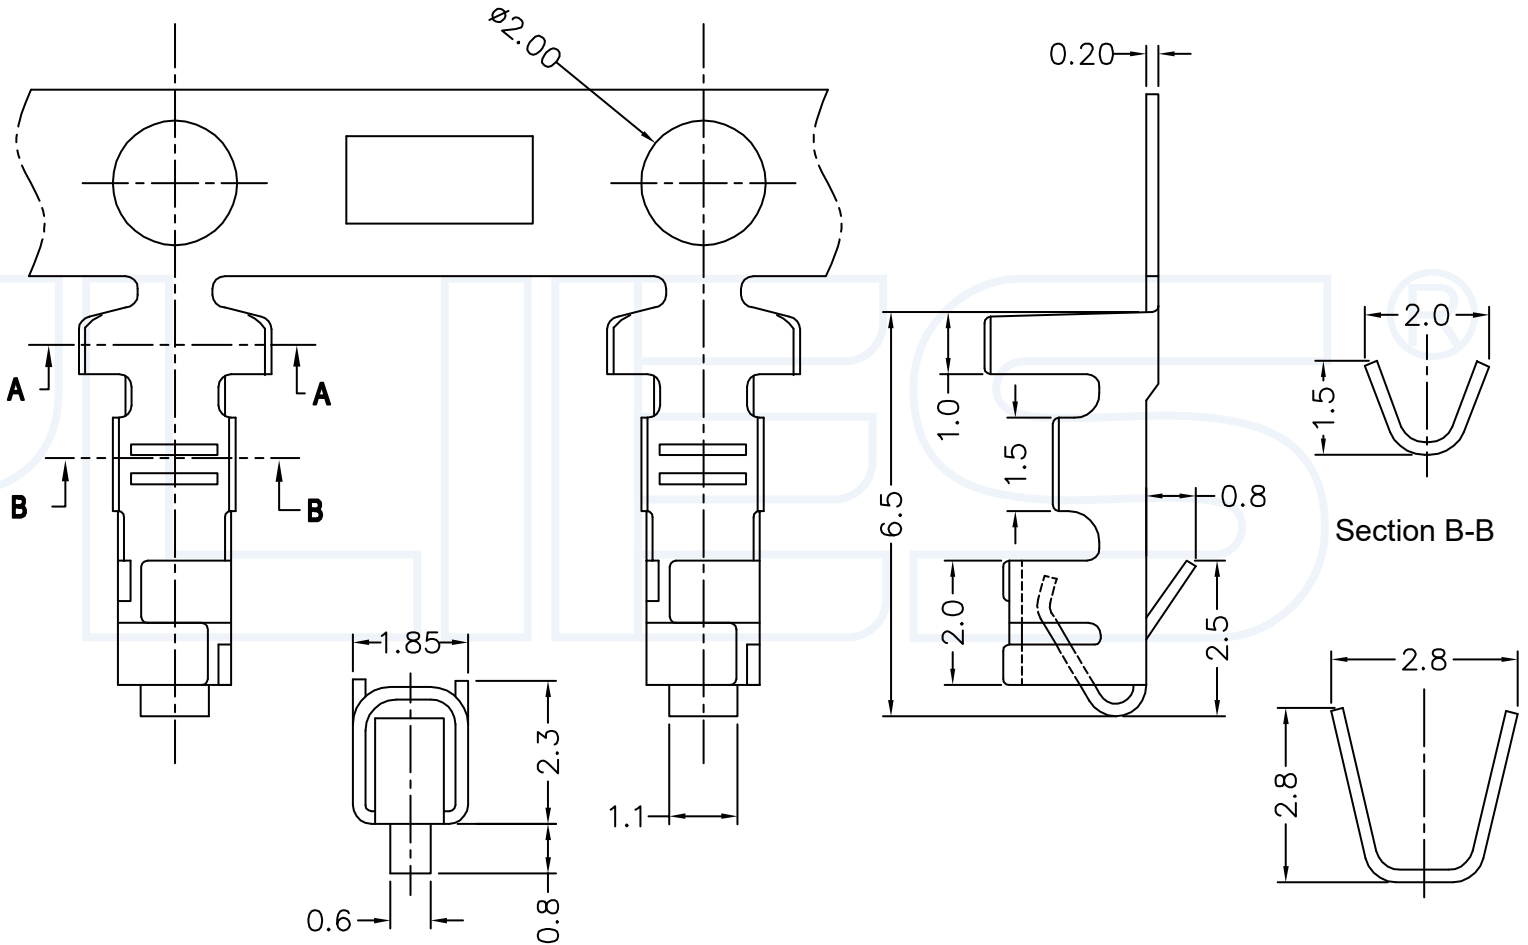

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 386-2.54mm 端子带扣 DATE: 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: T254-S1XC DRAWING NO: