

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric



Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing:PA66 UL94V-0
 端子: 黄铜
 Contact: Brass



2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating:250V AC/DC .
 额定电流: 3 AMP (AWG #22-28) .
 Raring Current:3 AMP (AWG #22-28) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 800V AC/MINUTE
 Withstanding Voltage:800V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION
W254-XX XX X XX X

NO.OF PINS Per Row 02-15P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 254:2.54mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	CONTACL SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME

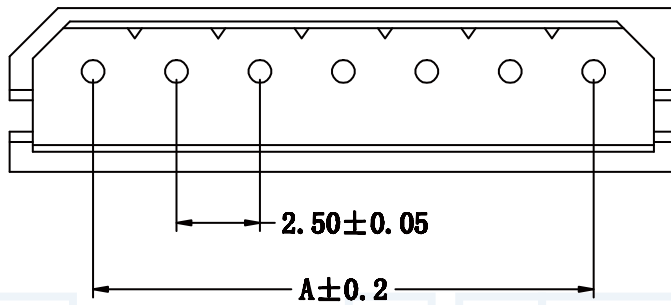

PCB LAYOUT

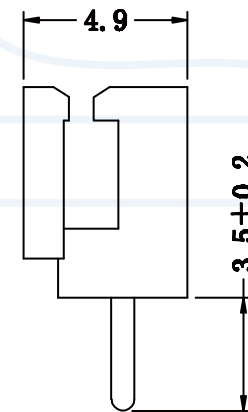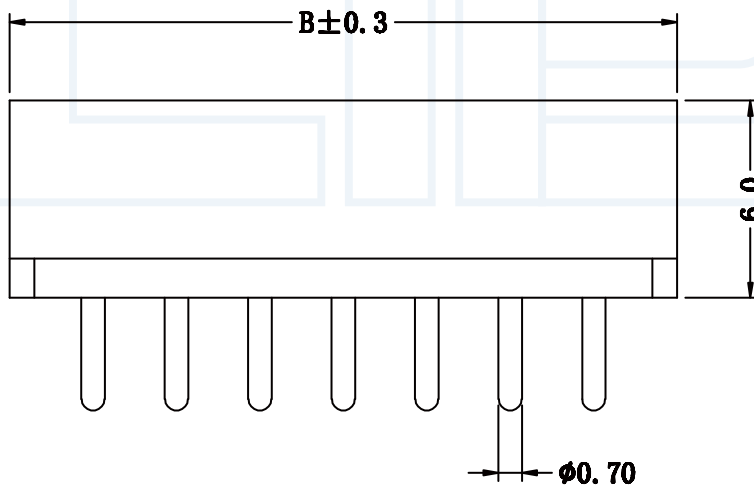

No. of Contacts	DIMENSIONS	
	DIM A	DIM B
2Y	2.50	7.50
3Y	5.00	10.00
4Y	7.50	12.50
5Y	10.00	15.00
6Y	12.50	17.50
7Y	15.00	20.00
8Y	17.50	22.50
9Y	20.00	25.00
10Y	22.50	27.50
11Y	25.00	30.00
12Y	27.50	32.50
13Y	30.00	35.00
14Y	32.50	37.50
15Y	35.00	40.00

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 390-2.54mm 单排插针180度-5264 DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W254-XXS1BSA DRAWING NO:

1 2 3 4 5 6 7 8 9