

1 2 3 4 5 6 7 8 9



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA66 UL94V-2
 Housing: PA66 UL94V-2
- 2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC .
 额定电流: 5 AMP (AWG #22-24) .
 Raring Current: 5AMP (AWG #22-24) .
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance: ≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 30--XX XXX

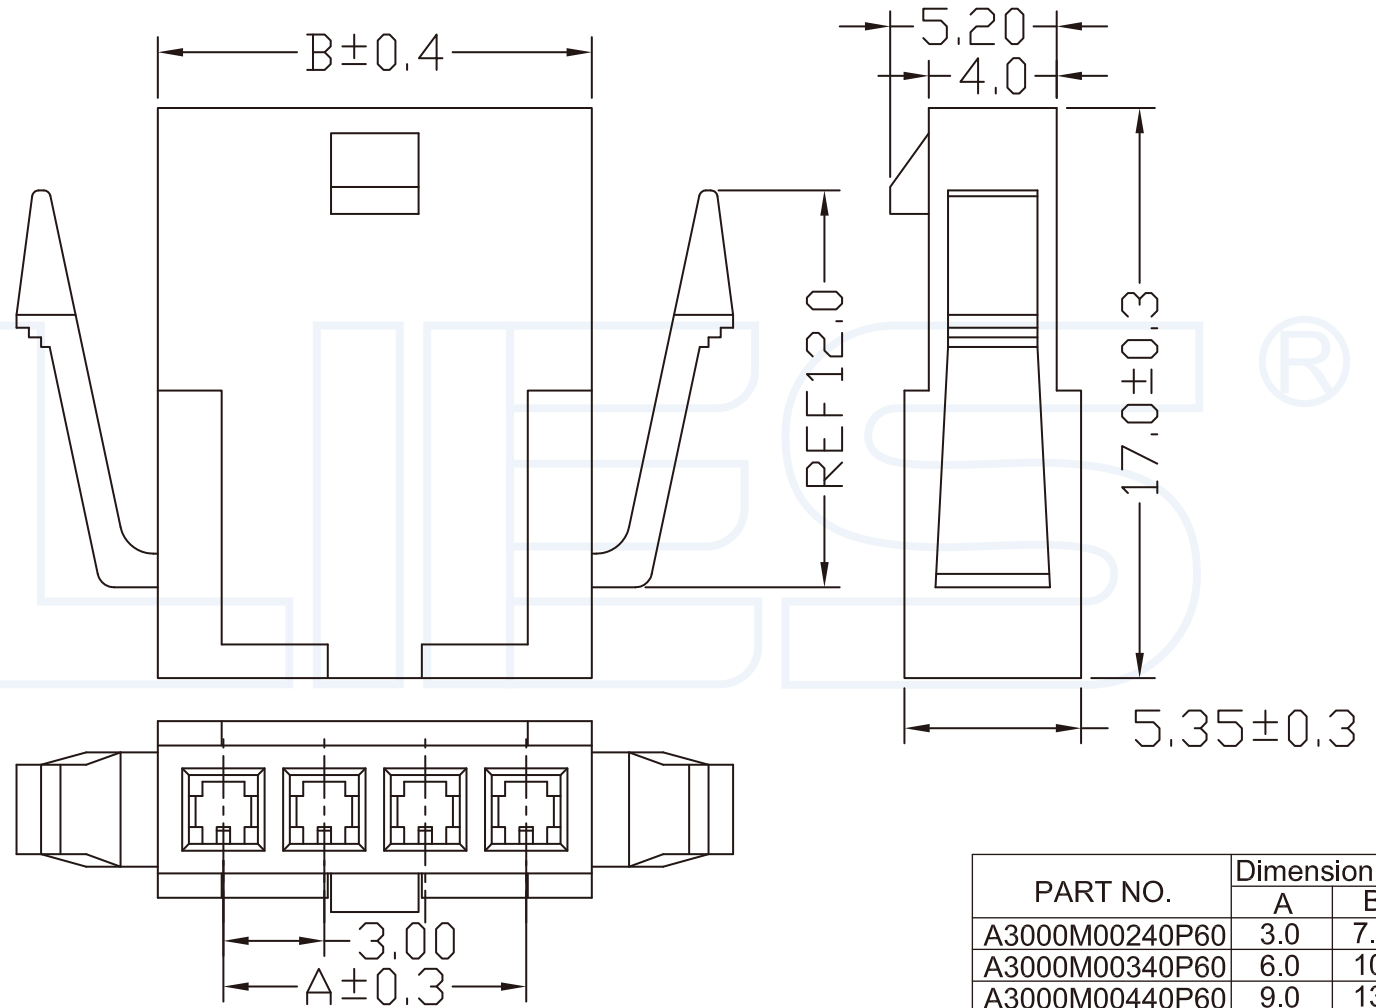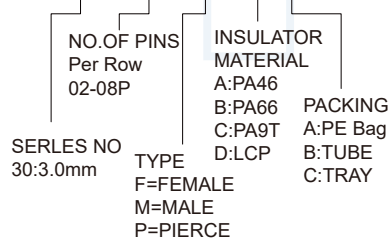

PART NO.	Dimension mm	
	A	B
A3000M00240P60	3.0	7.00
A3000M00340P60	6.0	10.00
A3000M00440P60	9.0	13.00
A3000M00540P60	12.0	16.00
A3000M00640P60	15.0	19.00

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE: 402-3.0mm母胶壳单排(MX3.0) DATE: 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: H30-XXFBA DRAWING NO:

1 2 3 4 5 6 7 8 9