

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T UL94V-0
Housing: PA9T UL94V-0
端子 (焊片): 磷青铜 (黄铜)
Contact (Solder tab): Phosphor bronze (Brass)





2-特性 (characteristics):

额定电压: 100V AC/DC .
Voltage Rating: 100V AC/DC .
额定电流: 1 AMP (AWG #28-32) .
Raring Current: 1 AMP (AWG #28-32) .
接触阻抗: ≤ 10mΩ MAX.
Contact Resistance: ≤ 10mΩ MAX.
绝缘阻抗: ≥ 500MΩMIN.
Insulating Resistance: ≥ 500MΩMIN.
耐电压: 800V AC/MINUTE
Withstanding Voltage: 800V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C


ORDERING INFORMATION

W35-XX XX X XX X

NO.OF PINS Per Row 02P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING MATERIAL A:PE Bag B:TUBE C:TRAY
SERLES NO 35:3.5mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8u" A9=30u" B9=30U" S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE	CONTACT SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME

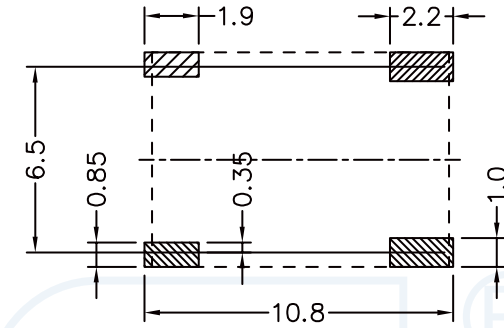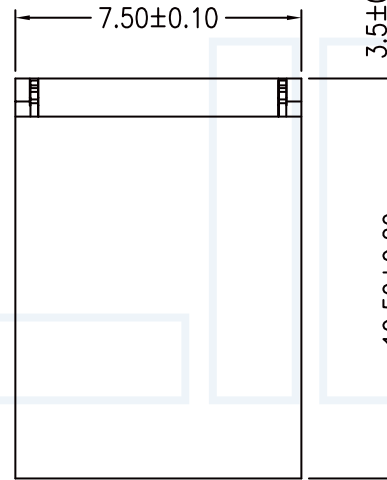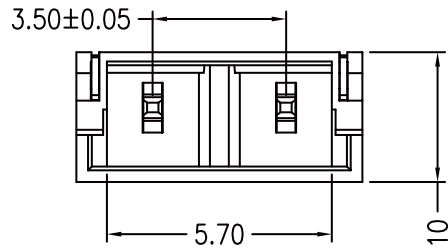

PCB LAYOUT

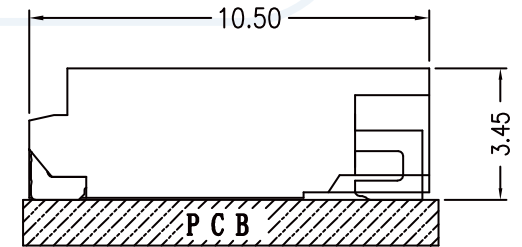

ASSEMBLY LAYOUT

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

411-3.5mm 高压插针2P 贴片 (BHD)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

W35-02S1CWTB

DRAWING NO:

1

2

3

4

5

6

7

8

9