

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国强
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)

端子: 磷青铜

Contact: Phosphor bronze

#### 2-特性 (characteristics):

额定电压: 250V AC/DC .

Voltage Rating: 250V AC/DC .

额定电流: 10 AMP (AWG #16-22) .

Rating Current: 10 AMP (AWG #16-22) .

接触阻抗: ≤ 10mΩ MAX.

Contact Resistance: ≤ 10mΩ MAX .

绝缘阻抗: ≥ 1000MΩMIN.

Insulating Resistance: ≥ 1000MΩMIN.

耐电压: 1500V AC/MINUTE

Withstanding Voltage: 1500V AC/MINUTE

温度范围: -25度至+85度



Temperature Range: -25°C to +85°C

### ORDERING INFORMATION

#### T396- XX X X

SERLES NO	396:3.96mm	PACKING QTY
CONTACT PLATING	FULL OF GOLD SEMI-GOLD	
A0=0.8u"	B0=0.8U"	
.....	.....	
A9=30u"	B9=30U"	
S1=ORDINARY TIN PLATED		
S2=MATTE TIN PLATED		
S3=TIN-PLATED HIGH-TEMPERATURE		

TERMINAL  
M:MALE  
F:FEMALE

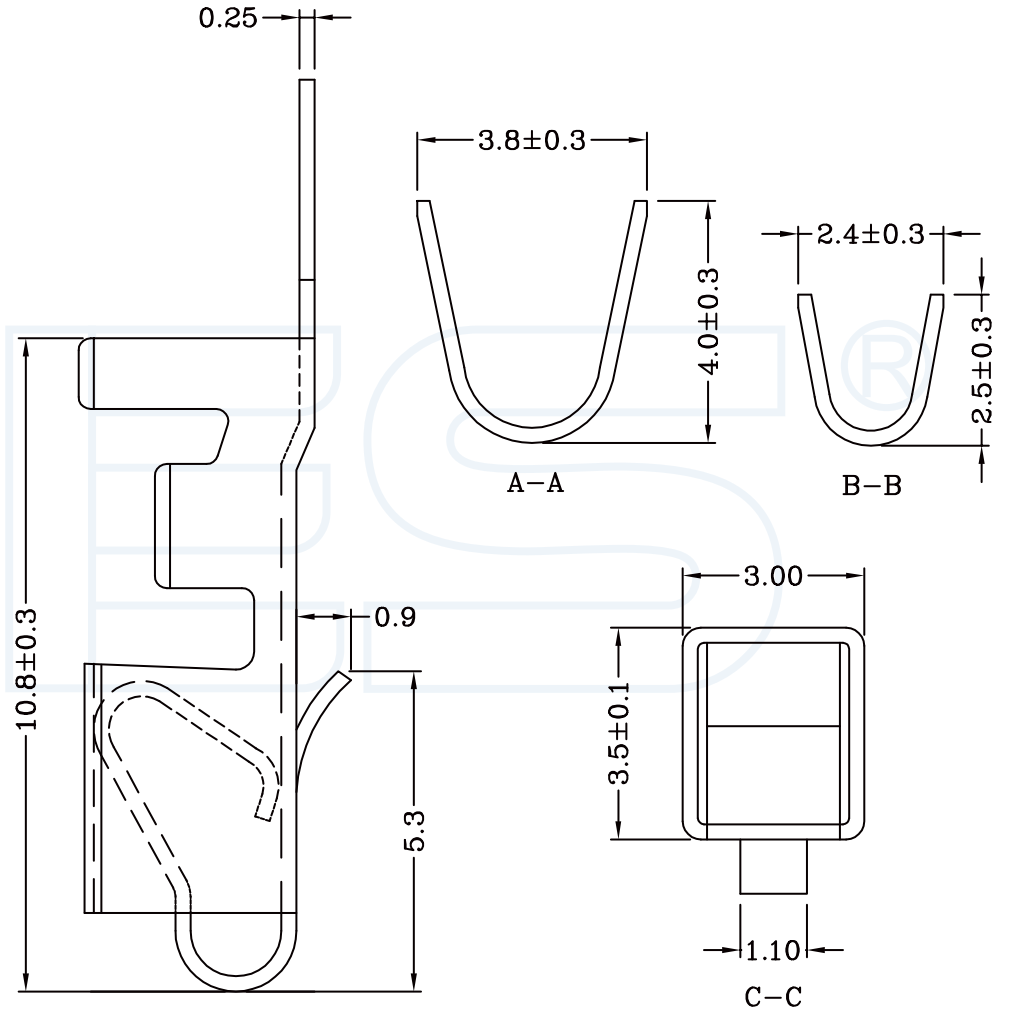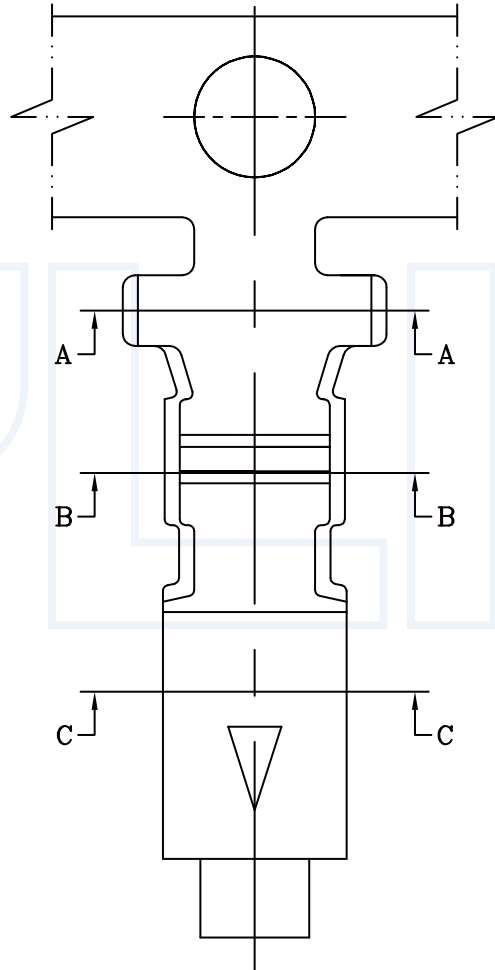

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

419-3.96mm 端子 (VH)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

T396-S1X3

DRAWING NO:

1

2

3

4

5

6

7

8

9