


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**


- 1-材料 (MATERIAL)  
 胶芯: PA66 UL94V-0  
 Housing: PA66 UL94V-0  
 端子: 黄铜  
 Contact: Brass
- 2-特性 (characteristics):  
 额定电压: 600V AC/DC .  
 Voltage Rating: 600V AC/DC .  
 额定电流: 7 AMP(AWG #20-24) .  
 Raring Current: 7 AMP(AWG #20-24) .  
 接触阻抗: ≤ 10mΩ MAX.  
 Contact Resistance: ≤ 10mΩ MAX.  
 绝缘阻抗: ≥ 1000MΩMIN.  
 Insulating Resistance: ≥ 1000MΩMIN.  
 耐电压: 1500V AC/MINUTE  
 Withstanding Voltage: 1500V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperature Range: -25°C to +85°C

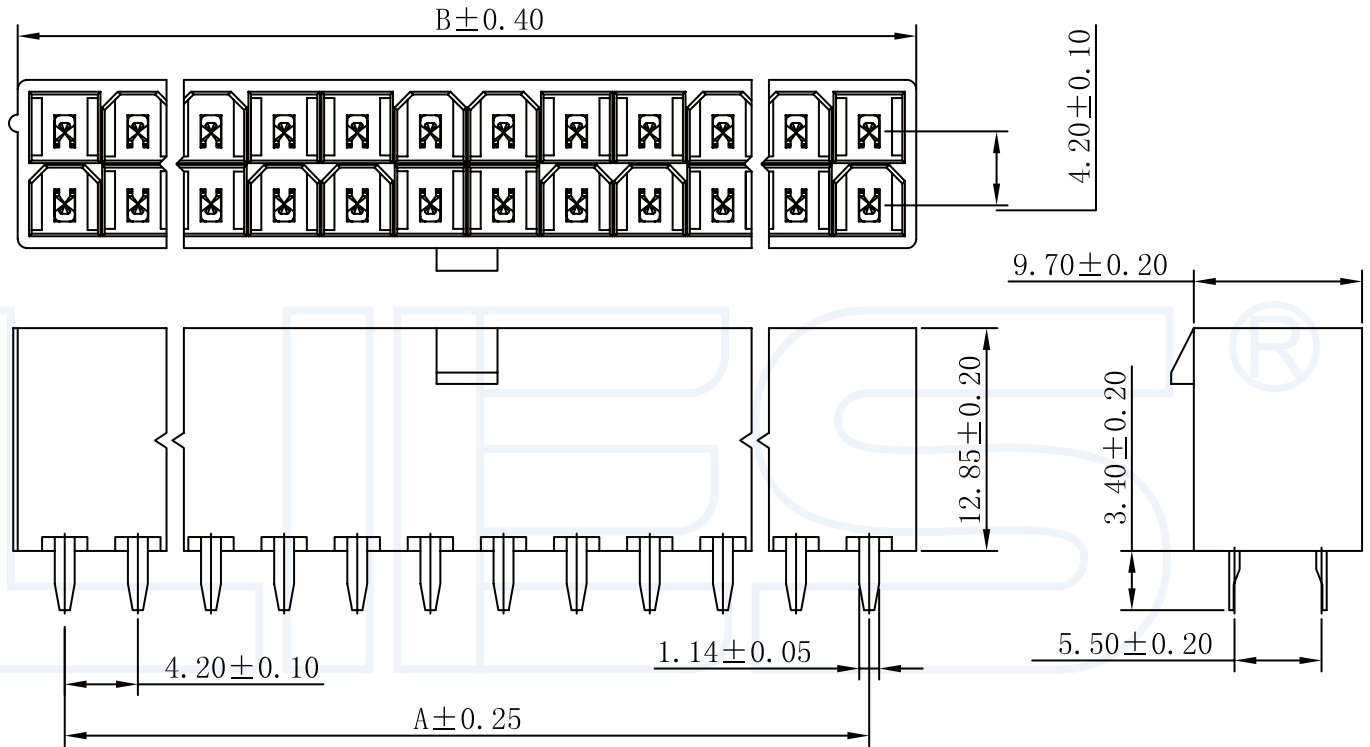

**ORDERING INFORMATION**

**W396-XX XX X XX X**

NO.OF PINS Per Row 02-12P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 42:4.2mm	CONTACT PLATING FULL OF GOLD SEMI-GOLD A0=0.8u" B0=0.8U" ... .. A9=30u" B9=30U"	CONTACL SHAPE S: Straight R: Right Angle LT: STRAIGHT SMT WT: RIGHT ANGLE SME
S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE		

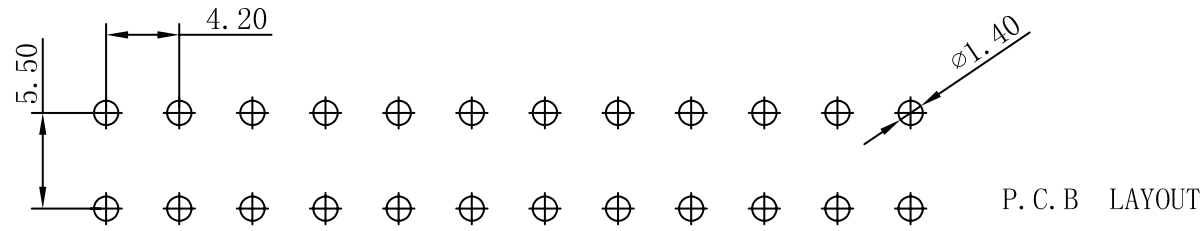

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 429-4.2mm 双排插针 180度空心针 (MX4.2) DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: W42-XXS1BSA DRAWING NO:

1 2 3 4 5 6 7 8 9