

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)
 胶芯: PA66 UL94V-2
 Housing: PA66 UL94V-2

2-特性 (characteristics):
 额定电压: 600V AC/DC .
 Voltage Rating: 600V AC/DC .
 额定电流: 9 AMP(AWG #16-22) .
 Raring Current: 9 AMP(AWG #16-22) .
 接触阻抗: ≤10mΩ MAX.
 Contact Resistance: ≤10mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 4 2 --XX XXX

NO.OF PINS Per Row 02-06P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 42:4.2mm	TYPE F=FEMALE M=MALE P=PIERCE	

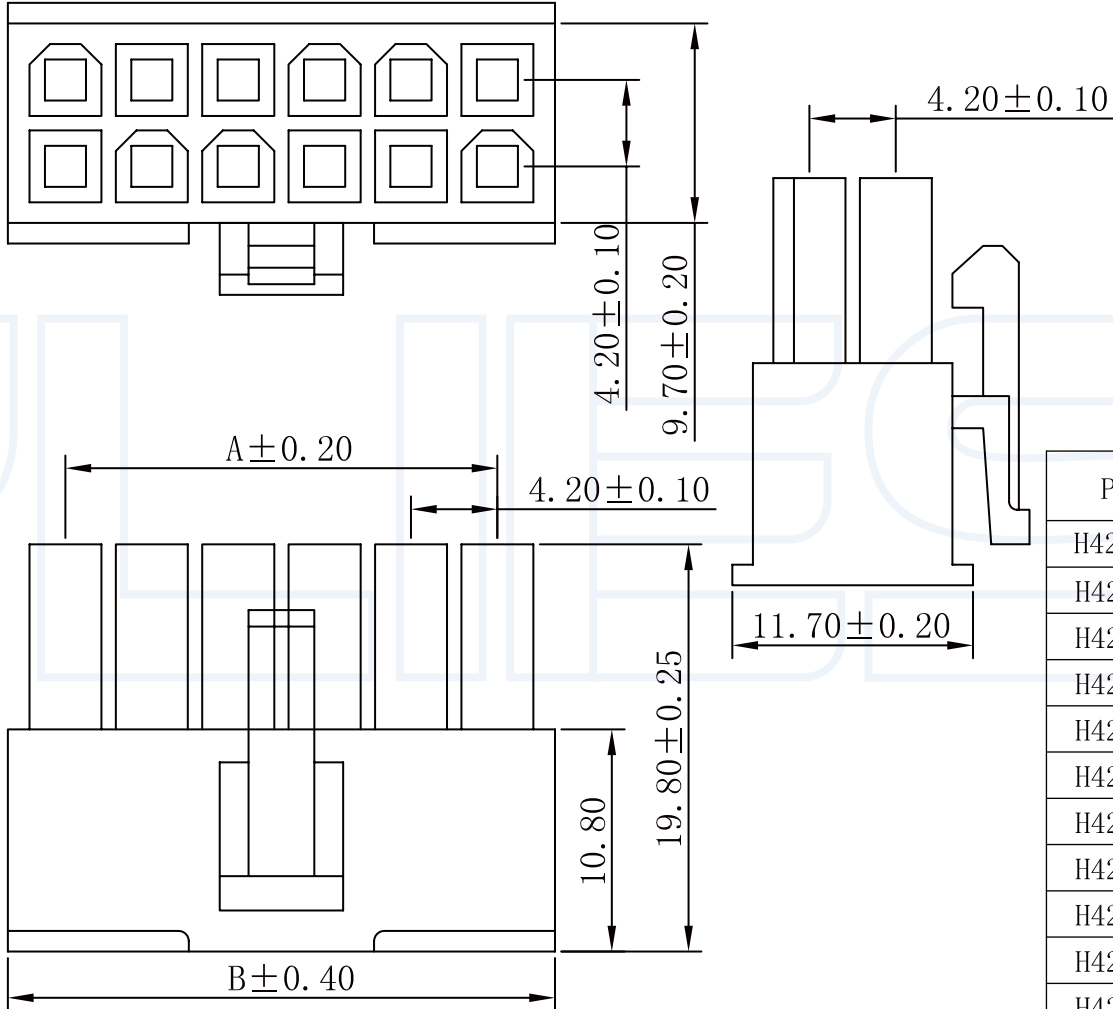

PART NO.	Dimensions (mm)	
	A	B
H4201-2*01	—	5.60
H4201-2*02	4.20	9.80
H4201-2*03	8.40	14.00
H4201-2*04	12.60	18.20
H4201-2*05	16.80	22.40
H4201-2*06	21.00	26.60
H4201-2*07	25.20	30.80
H4201-2*08	29.40	35.00
H4201-2*09	33.60	39.20
H4201-2*10	37.80	43.40
H4201-2*11	42.00	47.60
H4201-2*12	46.20	51.80

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 430-4.2mm 双排公胶壳(MX4.2) DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: H42-XXMBA DRAWING NO: