



1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

**Specifications/备注 (Remark)**

1-材料 (MATERIAL)  
 胶芯: PA66 UL94V-2  
 Housing: PA66 UL94V-2

2-特性 (characteristics):  
 额定电压: 600V AC/DC .  
 Voltage Rating: 600V AC/DC .  
 额定电流: 9 AMP(AWG #16-22) .  
 Raring Current: 9 AMP(AWG #16-22) .  
 接触阻抗: ≤ 10mΩ MAX.  
 Contact Resistance: ≤ 10mΩ MAX.  
 绝缘阻抗: ≥ 1000MΩMIN.  
 Insulating Resistance: ≥ 1000MΩMIN.  
 耐电压: 1500V AC/MINUTE  
 Withstanding Voltage: 1500V AC/MINUTE  
 温度范围: -25度至+85度  
 Temperture Range: -25°Cto +85°C

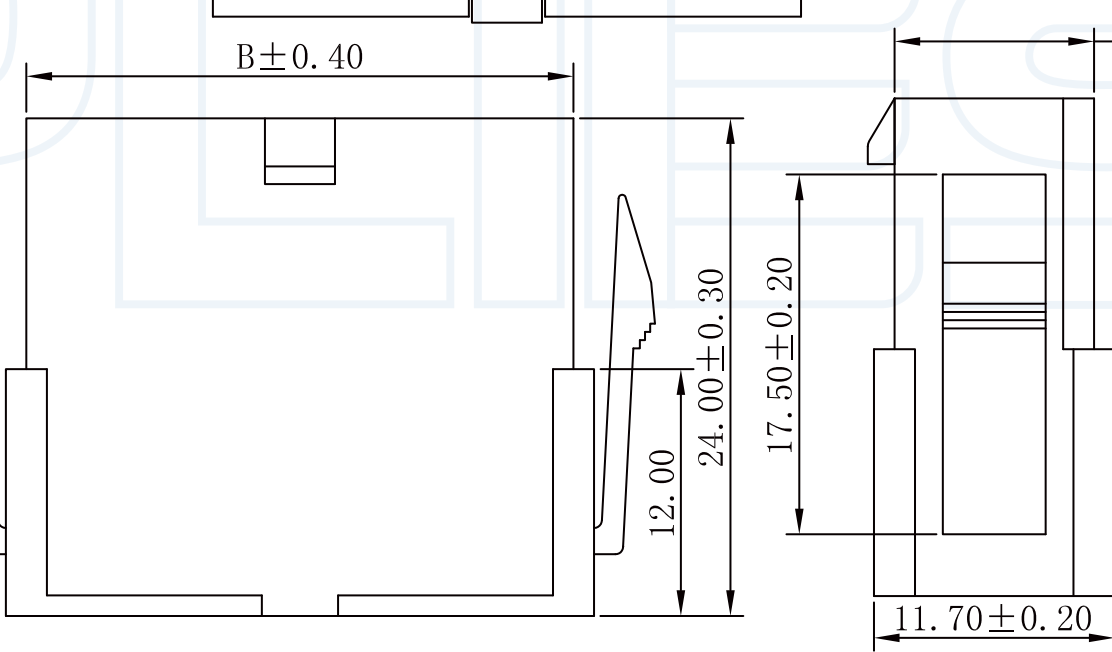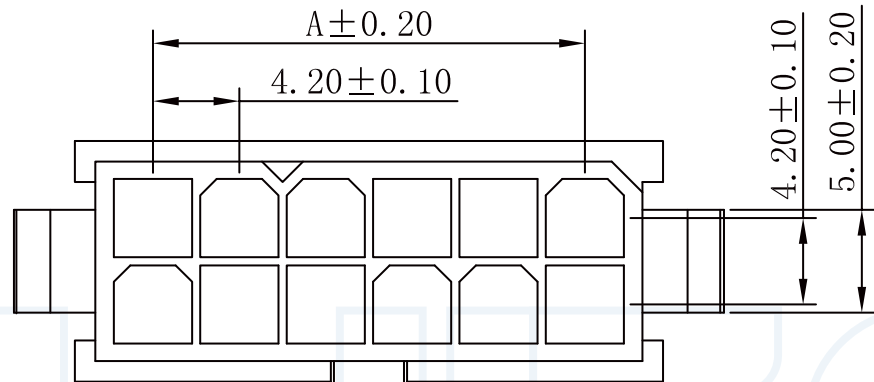

PART NO.	Dimensions (mm)	
	A	B
H4202-2*01	—	5.60
H4202-2*02	4.20	9.80
H4202-2*03	8.40	14.00
H4202-2*04	12.60	18.20
H4202-2*05	16.80	22.40
H4202-2*06	21.00	26.60
H4202-2*07	25.20	30.80
H4202-2*08	29.40	35.00
H4202-2*09	33.60	39.20
H4202-2*10	37.80	43.40
H4202-2*11	42.00	47.60
H4202-2*12	46.20	51.80

**ORDERING INFORMATION**

**H 4 2 --XX XXX**

NO.OF PINS  
Per Row  
02-06P

INSULATOR MATERIAL  
A:PA46  
B:PA66  
C:PA9T  
D:LCP

PACKING  
A:PE Bag  
B:TUBE  
C:TRAY

SERLES NO  
42:4.2mm

TYPE  
F=FEMALE  
M=MALE  
P=PIERCE

**YLIES** 东莞市瑞翔精密连接器有限公司  
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 431-4.2mm 双排母胶壳(MX4.2) DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: H42-XXFBA DRAWING NO:

1 2 3 4 5 6 7 8 9