

1 2 3 4 5 6 7 8 9



ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国防
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 端子: 黄铜
 Contact: Brass
- 2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating:250V AC/DC .
 额定电流: 5 AMP (AWG #18-20) .
 Raring Current:5 AMP (AWG #18-20) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance:≤20mΩ MAX .
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage:1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

T508- XX X X

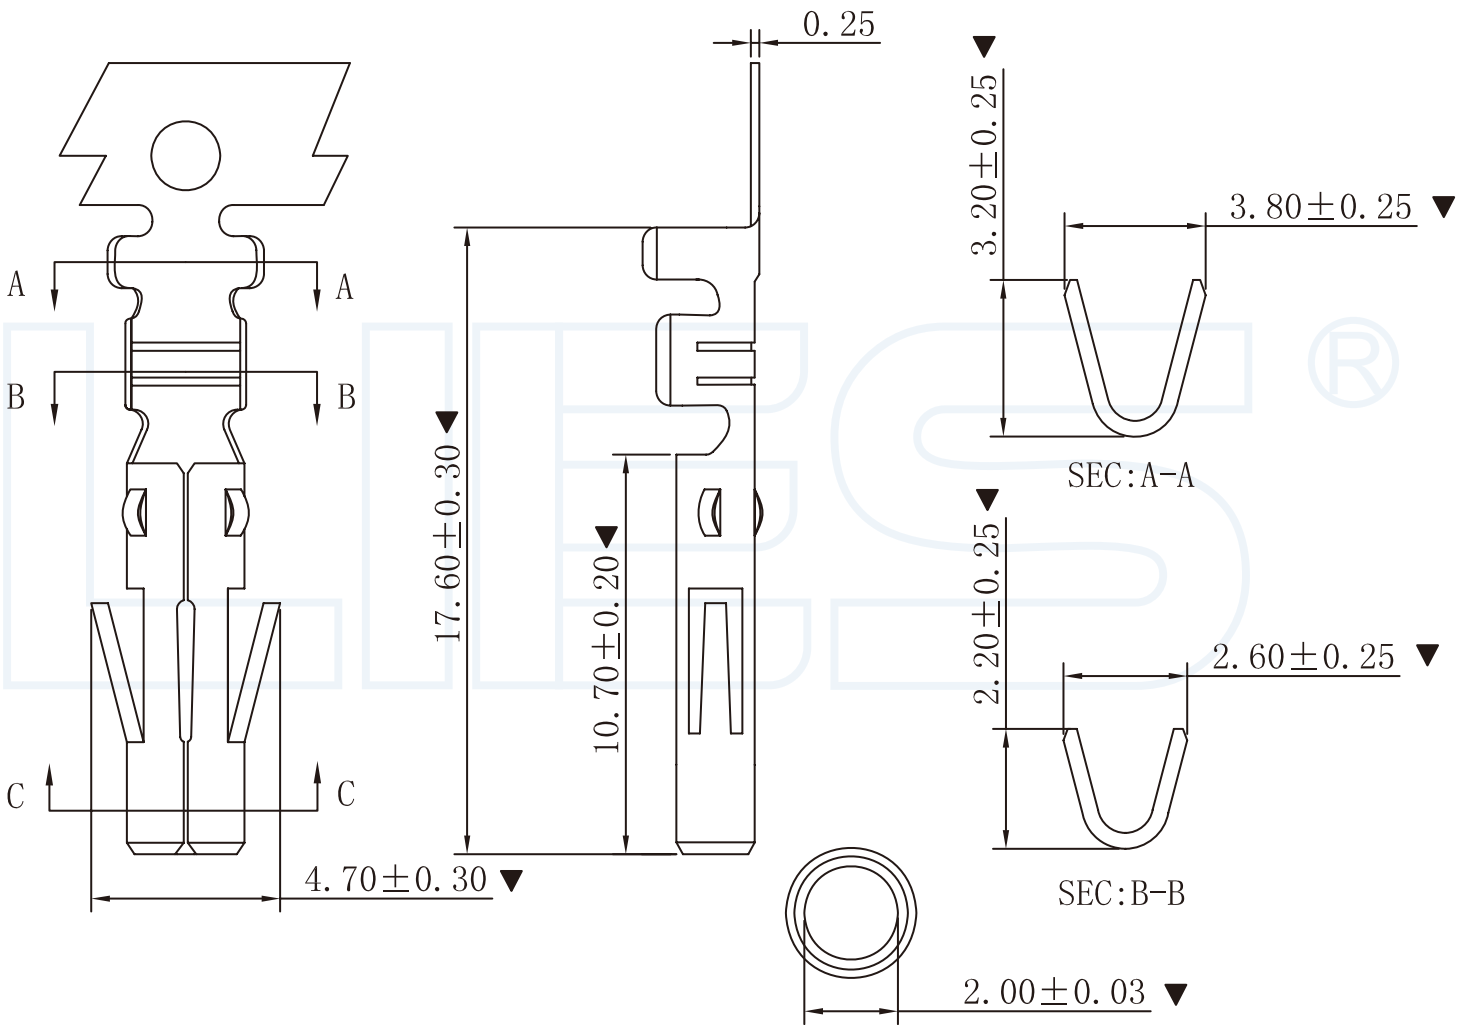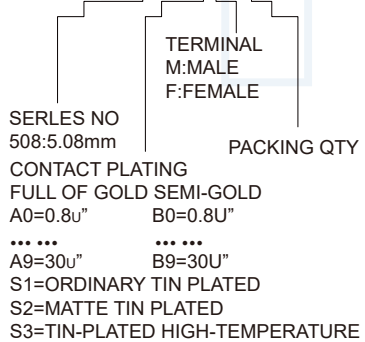

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 439-5.08mm 大四P 母端子 (MX5.08) DATE 2018-02-18

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1 PART NO: T42-S1FX DRAWING NO:

1 2 3 4 5 6 7 8 9