


1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


- 1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing: PA66 UL94V-0
 端子: 黄铜
 Contact: Brass
- 2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating: 250V AC/DC .
 额定电流: 5 AMP(AWG #18-20) .
 Raring Current: 5 AMP(AWG #18-20) .
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance: ≥1000MΩMIN.
 耐电压: 1500V AC/MINUTE
 Withstanding Voltage: 1500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°Cto +85°C

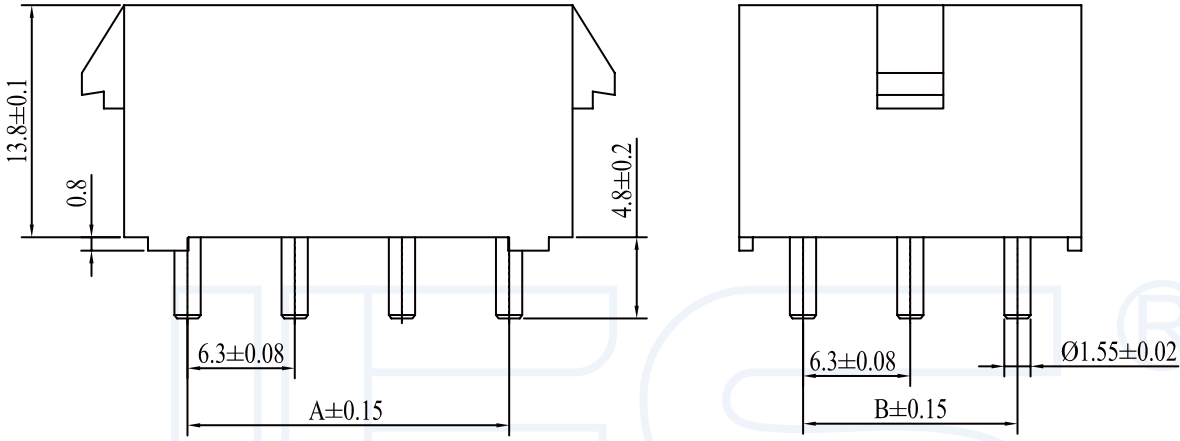

ORDERING INFORMATION

W63 -XX XX X XX X

- | | | |
|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| NO.OF PINS
Per Row
02-15P | INSULATOR
MATERIAL
A:PA46
B:PA66
C:PA9T
D:LCP | PACKING
A:PE Bag
B:TUBE
C:TRAY |
| SERLES NO
63:6.3mm | CONTACT PLATING
FULL OF GOLD SEMI-GOLD
A0=0.8u" B0=0.8U" | CONTACT SHAPE
S: Straight
R: Right Angle
LT: STRAIGHT SMT
WT: RIGHT ANGLE SME |
|
A9=30u" S1=ORDINARY TIN PLATED
S2=MATTE TIN PLATED
S3=TIN-PLATED HIGH-TEMPERATURE |
B9=30U" | |

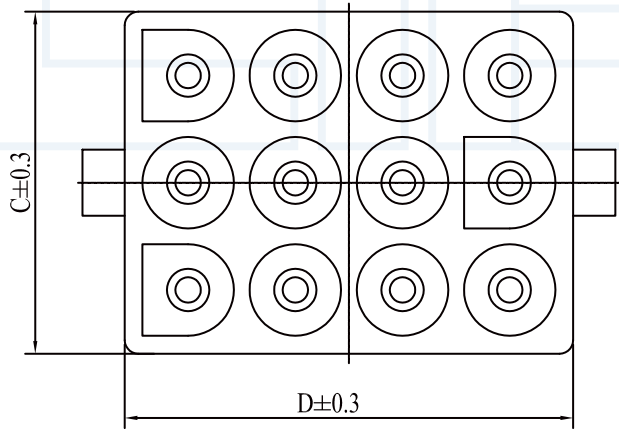

线数 Poles	编号 Part No	尺寸Dimensions (mm)			
		A	B	C	D
2	63080-2Y	6.3	0	7.6	14.0
3	63080-3Y	12.6	0	7.6	20.3
4	63080-4Y	6.3(18.9)	6.3(0)	14.0(7.6)	14.0(26.6)
5	63080-5Y	25.2	0	7.6	32.9
6	63080-6Y	12.6	6.3	14.0	20.3
9	63080-9Y	12.6	12.6	20.3	20.3
12	63080-12Y	18.9	12.6	20.3	26.6
15	63080-15Y	18.9	18.9	26.6	32.9

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE 440-6.3mm 三排插针 180度 (63080)

DATE 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: W63-XXS1BSA DRAWING NO:

1 2 3 4 5 6 7 8 9