

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)




胶芯: PA66 UL94V-2
Housing: PA66 UL94V-2

2-特性 (characteristics):

额定电压: 250V AC/DC .
Voltage Rating: 250V AC/DC .
额定电流: 5 AMP(AWG #18-22) .
Raring Current: 5 AMP(AWG #18-22) .
接触阻抗: ≤ 10mΩ MAX.
Contact Resistance: ≤ 10mΩ MAX.
绝缘阻抗: ≥ 1000MΩMIN.
Insulating Resistance: ≥ 1000MΩMIN.
耐电压: 1500V AC/MINUTE
Withstanding Voltage: 1500V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 63 --XX XXX

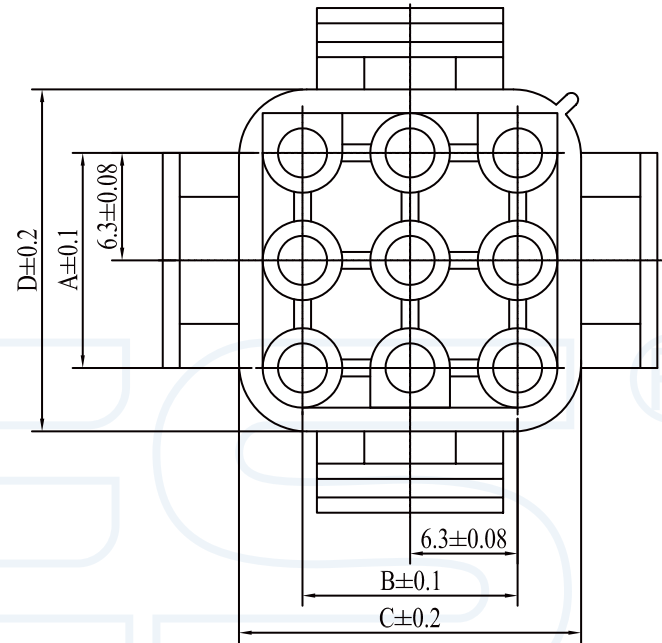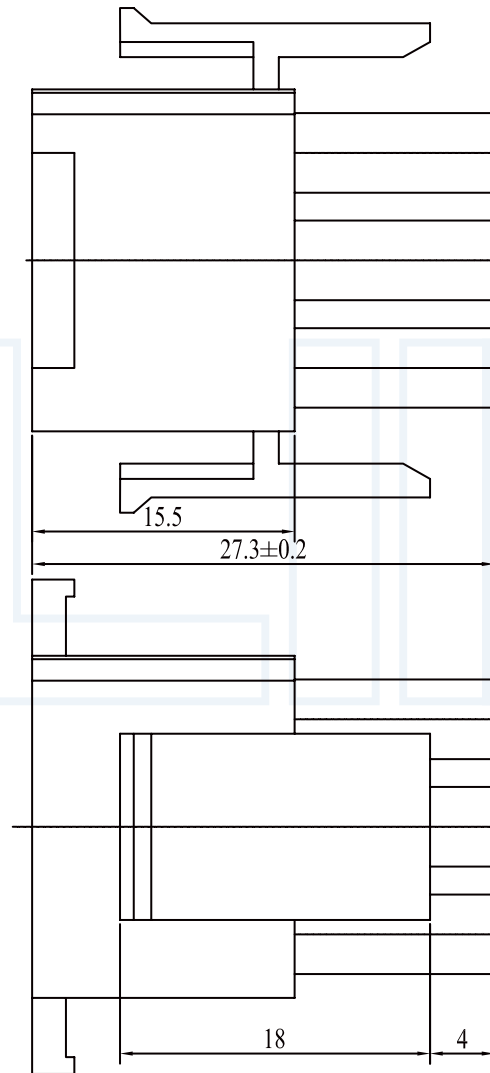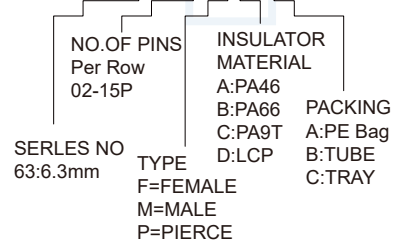

线数	编号	尺寸Dimensions (mm)			
Poles	Part No	A	B	C	D
2	63080-2Y	6.3	0	7.6	14.0
3	63080-3Y	12.6	0	7.6	20.3
4	63080-4Y	6.3(18.9)	6.3(0)	14.0(7.6)	14.0(26.6)
5	63080-5Y	25.2	0	7.6	32.9
6	63080-6Y	12.6	6.3	14.0	20.3
9	63080-9Y	12.6	12.6	20.3	20.3
12	63080-12Y	18.9	12.6	20.3	26.6
15	63080-15Y	18.9	18.9	20.3	32.9

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

441-6.3mm 三排胶壳 (63080)

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

H63-XXMBSA

DRAWING NO:

1

2

3

4

5

6

7

8

9