

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)


1-材料 (MATERIAL)
 胶芯: LCP UL94V-0
 Housing:LCP UL94V-0
 端子(焊片): 磷青铜 镍底30U"Min 镀全金1U"Min (镀全雾锡100U"Min)
 Contact: Phosphor bronze
 100U" Min Matte Tin Plating On Contact Area 30U"
 Min Ntckel Underplating Over All

2-特性 (characteristics):
 额定电压: 50V AC/DC .
 Voltage Rating:50V AC/DC.
 额定电流: 0.5 AMP.
 Raring Current:0.5 AMP .
 接触阻抗: ≤40mΩ MAX.
 Contact Resistance:≤40mΩ MAX.
 绝缘阻抗: ≥50MΩMIN.
 Insulating Resistance:≥50MΩMIN.
 耐电压: 250V AC/MINUTE
 Withstanding Voltage:250V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

FPXX- XX XX X XX X

SERLES NO 03:0.3mm	NO.OF PINS Per Row 13-71P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	CONTACTL SHAPE X:FLIP	PACKING A:PE Bag B:TUBE C:TRAY
CONTACT PLATING FULL OF GOLD SEMI-GOLD				
S1=ORDINARY TIN PLATED				
S2=MATTE TIN PLATED				
S3=TIN-PLATED HIGH-TEMPERATURE				

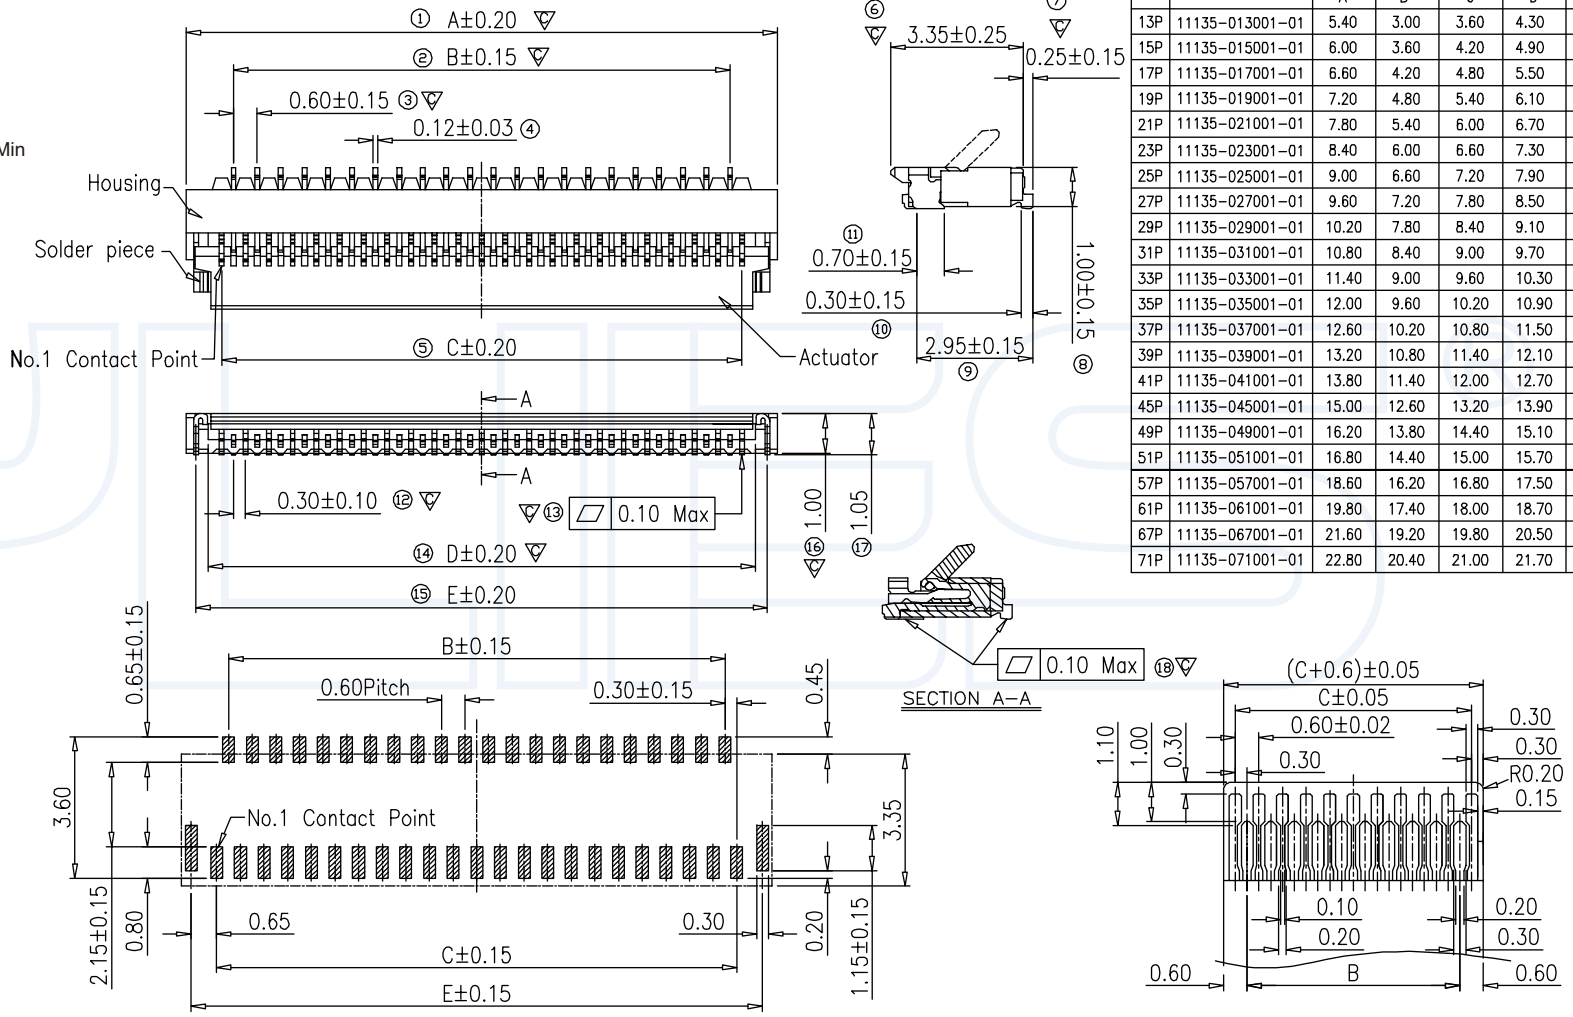

Pin	Part No.	Dimension				
		A	B	C	D	E
13P	11135-013001-01	5.40	3.00	3.60	4.30	4.90
15P	11135-015001-01	6.00	3.60	4.20	4.90	5.50
17P	11135-017001-01	6.60	4.20	4.80	5.50	6.10
19P	11135-019001-01	7.20	4.80	5.40	6.10	6.70
21P	11135-021001-01	7.80	5.40	6.00	6.70	7.30
23P	11135-023001-01	8.40	6.00	6.60	7.30	7.90
25P	11135-025001-01	9.00	6.60	7.20	7.90	8.50
27P	11135-027001-01	9.60	7.20	7.80	8.50	9.10
29P	11135-029001-01	10.20	7.80	8.40	9.10	9.70
31P	11135-031001-01	10.80	8.40	9.00	9.70	10.30
33P	11135-033001-01	11.40	9.00	9.60	10.30	10.90
35P	11135-035001-01	12.00	9.60	10.20	10.90	11.50
37P	11135-037001-01	12.60	10.20	10.80	11.50	12.10
39P	11135-039001-01	13.20	10.80	11.40	12.10	12.70
41P	11135-041001-01	13.80	11.40	12.00	12.70	13.30
45P	11135-045001-01	15.00	12.60	13.20	13.90	14.50
49P	11135-049001-01	16.20	13.80	14.40	15.10	15.70
51P	11135-051001-01	16.80	14.40	15.00	15.70	16.30
57P	11135-057001-01	18.60	16.20	16.80	17.50	18.10
61P	11135-061001-01	19.80	17.40	18.00	18.70	19.30
67P	11135-067001-01	21.60	19.20	19.80	20.50	21.10
71P	11135-071001-01	22.80	20.40	21.00	21.70	22.30