

1 2 3 4 5 6 7 8 9


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

- 1-材料 (MATERIAL)
 胶芯: PA9T UL94V-0
 Housing: PA9T UL94V-0
 端子(焊片): 磷青铜
 Contact: Phosphor bronze
- 2-特性 (characteristics):
 额定电压: 50V AC/DC
 Voltage Rating: 50V AC/DC
 额定电流: 0.5 AMP
 Rating Current: 0.5AMP
 接触阻抗: ≤20mΩ MAX.
 Contact Resistance: ≤20mΩ MAX.
 绝缘阻抗: ≥800MΩMIN.
 Insulating Resistance: ≥800MΩMIN.
 耐电压: 500V AC/MINUTE
 Withstanding Voltage: 500V AC/MINUTE
 温度范围: -25度至+85度
 Temperature Range: -25°C to +85°C

ORDERING INFORMATION
FPXX - XX XX X XX X

SERLES NO 10:1.0mm	INSULATOR MATERIAL A:PA46	CONTACT SHAPE S:STRAIGHT
NO.OF PINS Per Row	B:PA66	R:Right Angle
04-30P	C:PA9T	LT:Straight SMT
CONTACT PLATING FULL OF GOLD SEMI-GOLD	PACKING A:PE Bag	
S1=ORDINARY TIN PLATED	B:TUBE	
S2=MATTE TIN PLATED	C:TRAY	
S3=TIN-PLATED HIGH-TEMPERATURE		

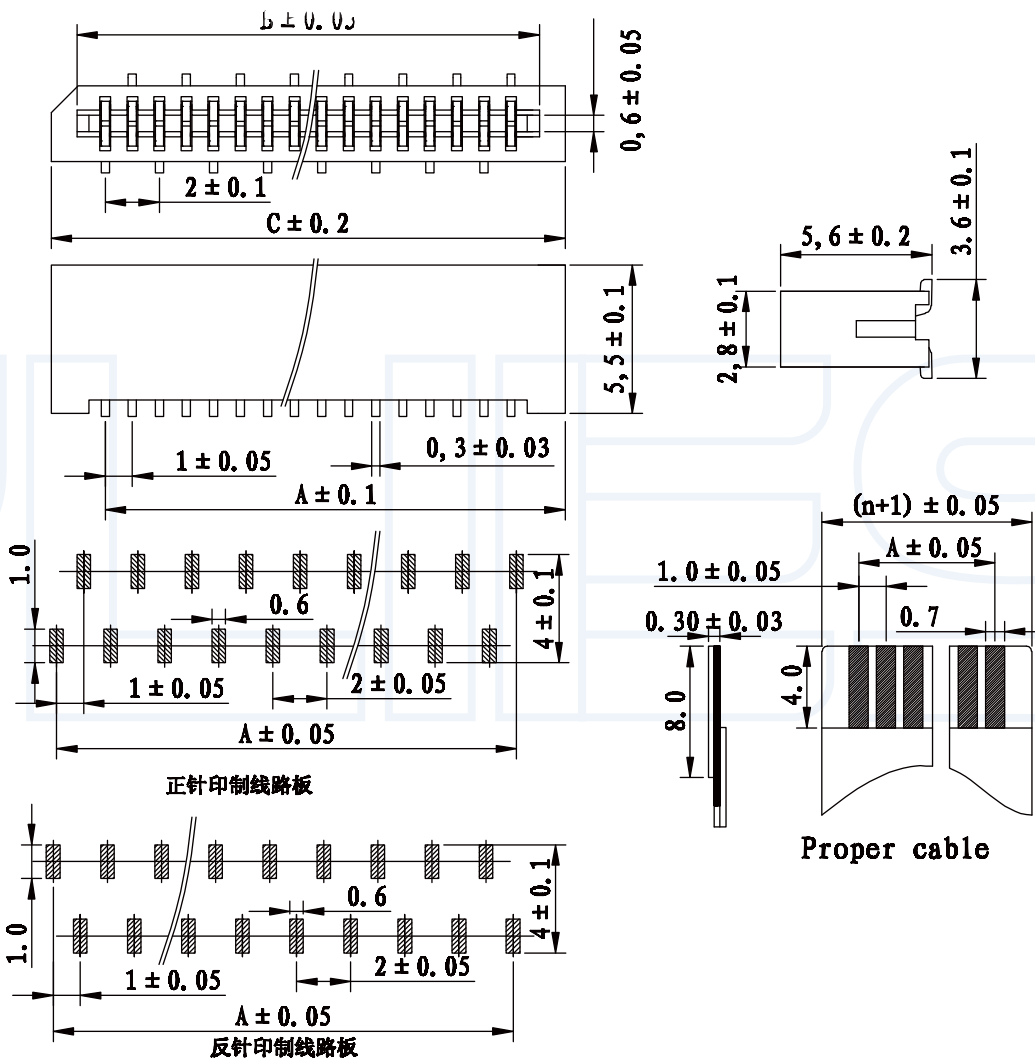

NO.of Contacts (n)	Dimensions		
	A	B	C
4	3.0	5.10	7.0
5	4.0	6.10	8.0
6	5.0	7.10	9.0
7	6.0	8.10	10.0
8	7.0	9.10	11.0
9	8.0	10.10	12.0
10	9.0	11.10	13.0
11	10.0	12.10	14.0
12	11.0	13.10	15.0
13	12.0	14.10	16.0
14	13.0	15.10	17.0
15	14.0	16.10	18.0
16	15.0	17.10	19.0
17	16.0	18.10	20.0
18	17.0	19.10	21.0
19	18.0	20.10	22.0
20	19.0	21.10	23.0
21	20.0	22.10	24.0
22	21.0	23.10	25.0
23	22.0	24.10	26.0
24	23.0	25.10	27.0
25	24.0	26.10	28.0
26	25.0	27.10	29.0
27	26.0	28.10	30.0
28	27.0	29.10	31.0
29	28.0	30.10	32.0
30	29.0	31.10	33.0

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE 461-1.0mm FPC插座 立贴错脚 L型双面接

DATE 2018-02-18

PROJECTON	REV A	UNIT mm	SCALE 1:1	PAGE 1/1
-----------	-------	---------	-----------	----------

PART NO: FP10-XXS1CLTB DRAWING NO:

1 2 3 4 5 6 7 8 9