

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

### Specifications/备注 (Remark)

#### 1-材料 (MATERIAL)

胶芯: PBT UL94V-0  
Housing: PBT UL94V-0  
端子(焊片): 磷青铜  
Contact: Phosphor bronze


#### 2-特性 (characteristics):

额定电压: 200V AC/DC .  
Voltage Rating: 200V AC/DC.  
额定电流: 1 AMP.  
Raring Current: 1 AMP .  
接触阻抗: ≤30mΩ MAX.  
Contact Resistance: ≤30mΩ MAX.  
绝缘阻抗: ≥1000MΩMIN.  
Insulating Resistance: ≥1000MΩMIN.  
耐电压: 500V AC/MINUTE  
Withstanding Voltage: 500V AC/MINUTE  
温度范围: -25度至+85度  
Temperture Range: -25°Cto +85°C

### ORDERING INFORMATION

**FPXX - XX XX X XX X**

SERLES NO 125:1.25mm	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:PBT	CONTACTL SHAPE U:UPPER D:DOWN S:STRAIGHT	PACKING A:PE Bag B:TUBE C:TRAY
NO.OF PINS Per Row 03-22P			
CONTACT PLATING FULL OF GOLD SEMI-GOLD S1=ORDINARY TIN PLATED S2=MATTE TIN PLATED S3=TIN-PLATED HIGH-TEMPERATURE			

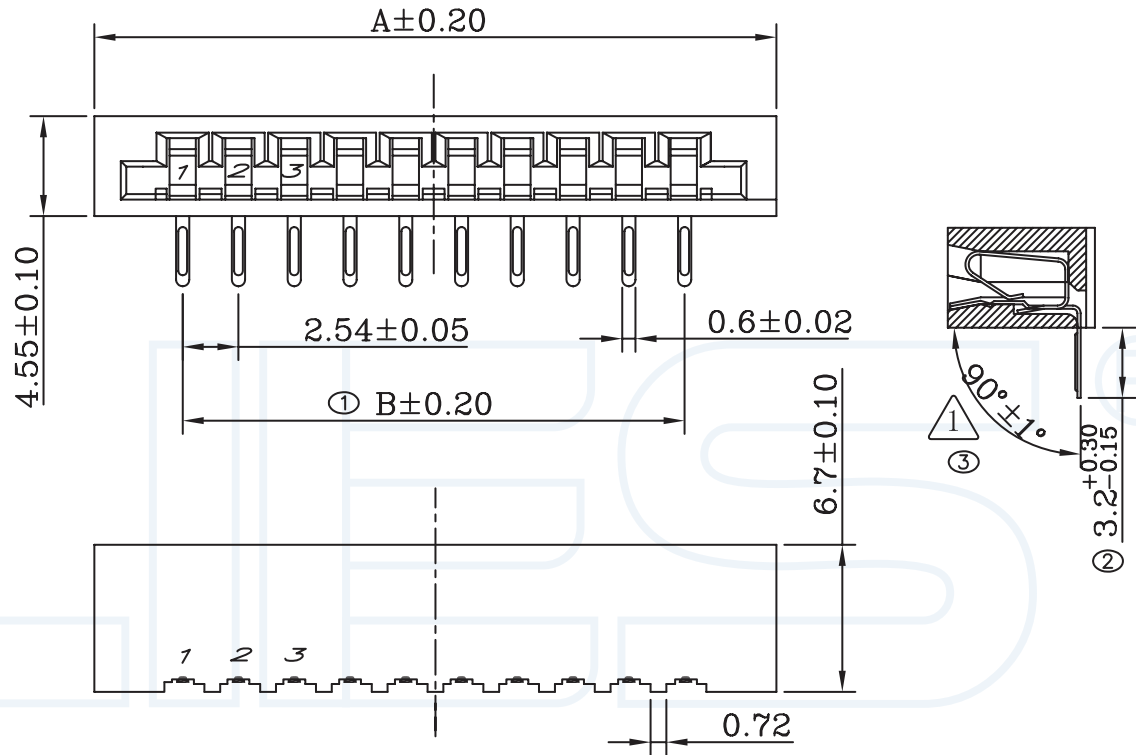

	3pin	4pin	5pin	6pin	7pin	8pin	9pin	10pin	11pin
A	13.28	15.82	18.36	20.9	23.44	25.98	28.52	31.06	33.6
B	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4
	12pin	13pin	14pin	16pin	17pin	18pin	20pin	22pin	
A	36.14	38.68	41.22	46.3	48.84	51.38	56.46	61.54	
B	27.94	30.48	33.02	38.1	40.64	43.18	48.26	53.34	

**YLIES** 东莞市瑞翔精密连接器有限公司  
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

468-2.54mm FPC插座 90度双面接

DATE

2018-02-18

PROJECTON



REV  
A

UNIT  
mm

SCALE  
1:1

PAGE  
1/1

PART NO:

FP254-XXS1DRB

DRAWING NO:

1

2

3

4

5

6

7

8

9