


ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PBT UL94V-0
 Housing:PBT UL94V-0
 端子: 磷青铜
 Contact: Phosphor bronze

2-特性 (characteristics):
 额定电流: 3 AMP.
 Rating Current:3 AMP.
 接触阻抗: ≤30mΩ MAX.
 Contact Resistance:≤30mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 1000V AC/MINUTE
 Withstanding Voltage:1000V AC/MINUTE
 温度范围: -55度至+105度
 Temperture Range: -55°Cto +105°C

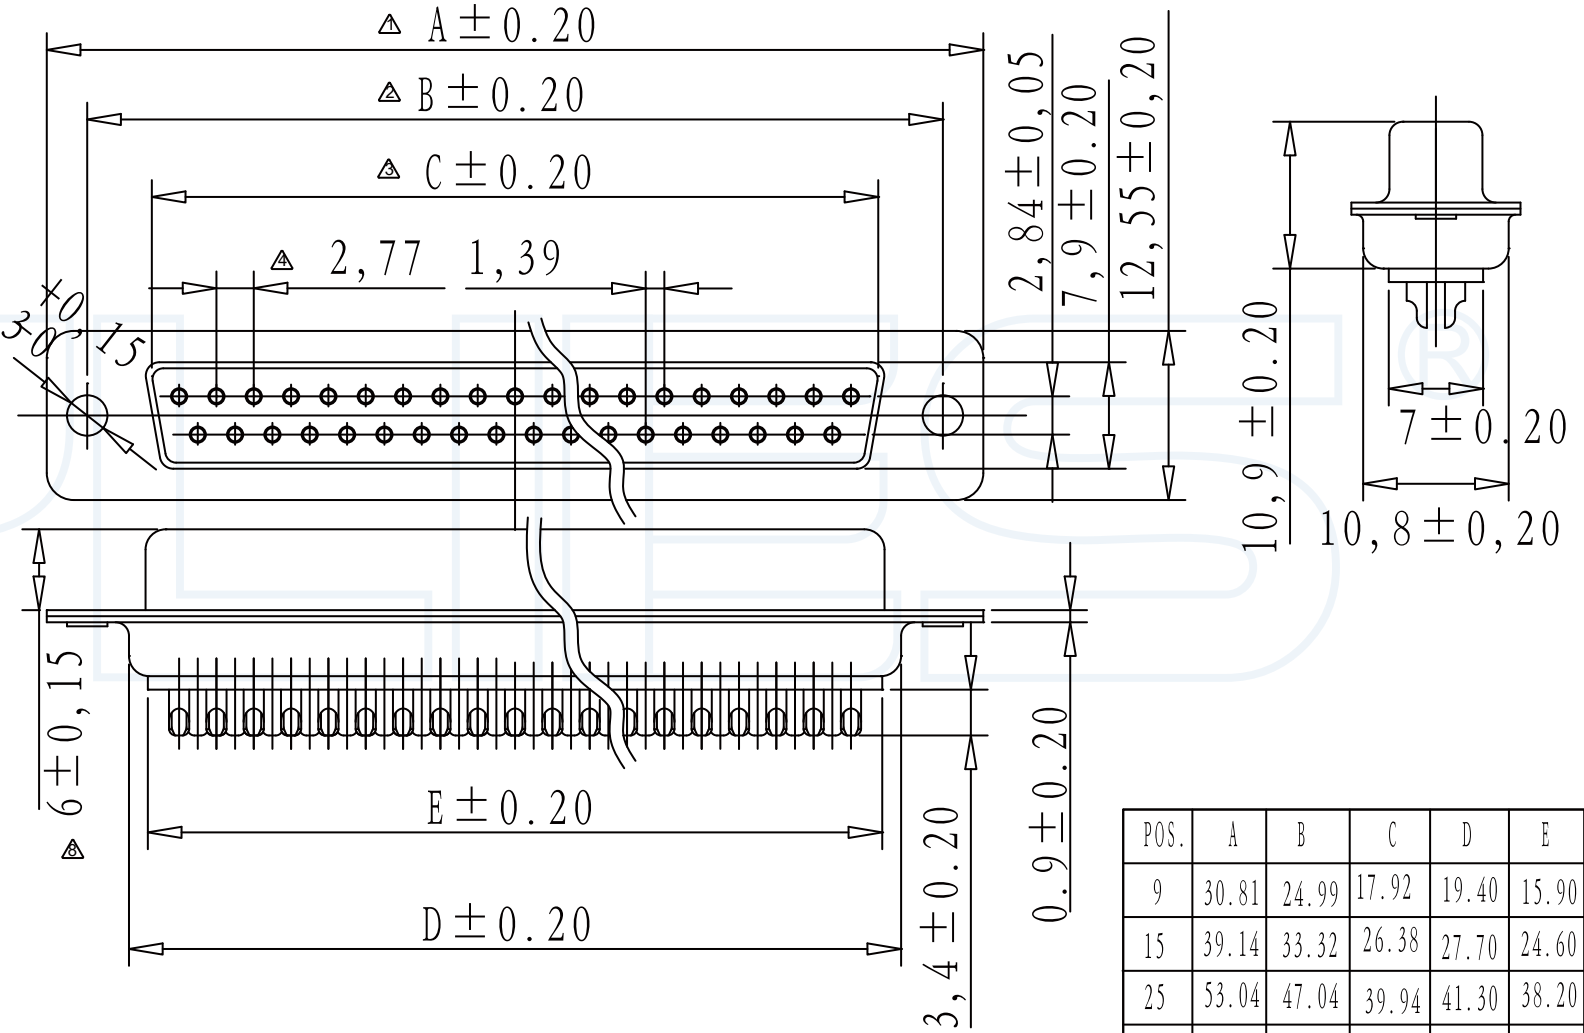

ORDERING INFORMATION
DS- 2 F D B0 A X A

D-SUB NO.OF PER ROW
 2=DUAL ROW
 3=THREE ROW

CONTACT C:PA9T
 SHAPE S:STRAIGHT
 R:RIGHT ANGLE
 D:WELDING LINE

INSULATOR MATERIAL
 A:PBT
 B:PA6T

COLOUR
 B:BLACK
 L:BLUE

TERMINAL
 M:MALE
 F:FEMALE

PACKING
 A:PE Bag
 B:TUBE
 C:TRAY

CONTACT PLATING
 FULL OF GOLD SEMI-GOLD
 A0=0.8u" B0=0.8U"
 A9=30u" B9=30U"

POS.	A	B	C	D	E
9	30.81	24.99	17.92	19.40	15.90
15	39.14	33.32	26.38	27.70	24.60
25	53.04	47.04	39.94	41.30	38.20
37	69.50	63.50	56.43	57.30	54.50

YLIES 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

TITLE: 470-D-SUB 母头插座 双排焊线式
 DATE: 2018-02-18

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON REV A UNIT mm SCALE 1:1 PAGE 1/1

PART NO: DS-2FDB0AXA DRAWING NO: