

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PBT UL94V-0
Housing: PBT UL94V-0
端子: 磷青铜

Contact: Phosphor bronze


2-特性 (characteristics):

额定电流: 5 AMP.
Raring Current: 5 AMP.
接触阻抗: ≤30mΩ MAX.
Contact Resistance: ≤30mΩ MAX.
绝缘阻抗: ≥1000MΩMIN.
Insulating Resistance: ≥1000MΩMIN.
耐电压: 1000V AC/MINUTE
Withstanding Voltage: 1000V AC/MINUTE
温度范围: -55度至+105度
Temperature Range: -55°C to +105°C

ORDERING INFORMATION

DS - 3 F R B0 A X A

D-SUB	NO.OF PER ROW	2=DUAL ROW 3=THREE ROW	TERMINAL	M:MALE F:FEMALE	CONTACT PLATING	FULL OF GOLD SEMI-GOLD	A0=0.8u" B0=0.8u" A9=30u" B9=30u"	INSULATOR MATERIAL	A:PBT B:PA6T	CONTACT CL.:	PA9T	COLOUR	B:BLACK L:BLUE	PACKING	A:PE Bag B:TUBE C:TRAY
	SHAPE	S:STRAIGHT R:RIGHT ANGLE D:WELDING LINE													

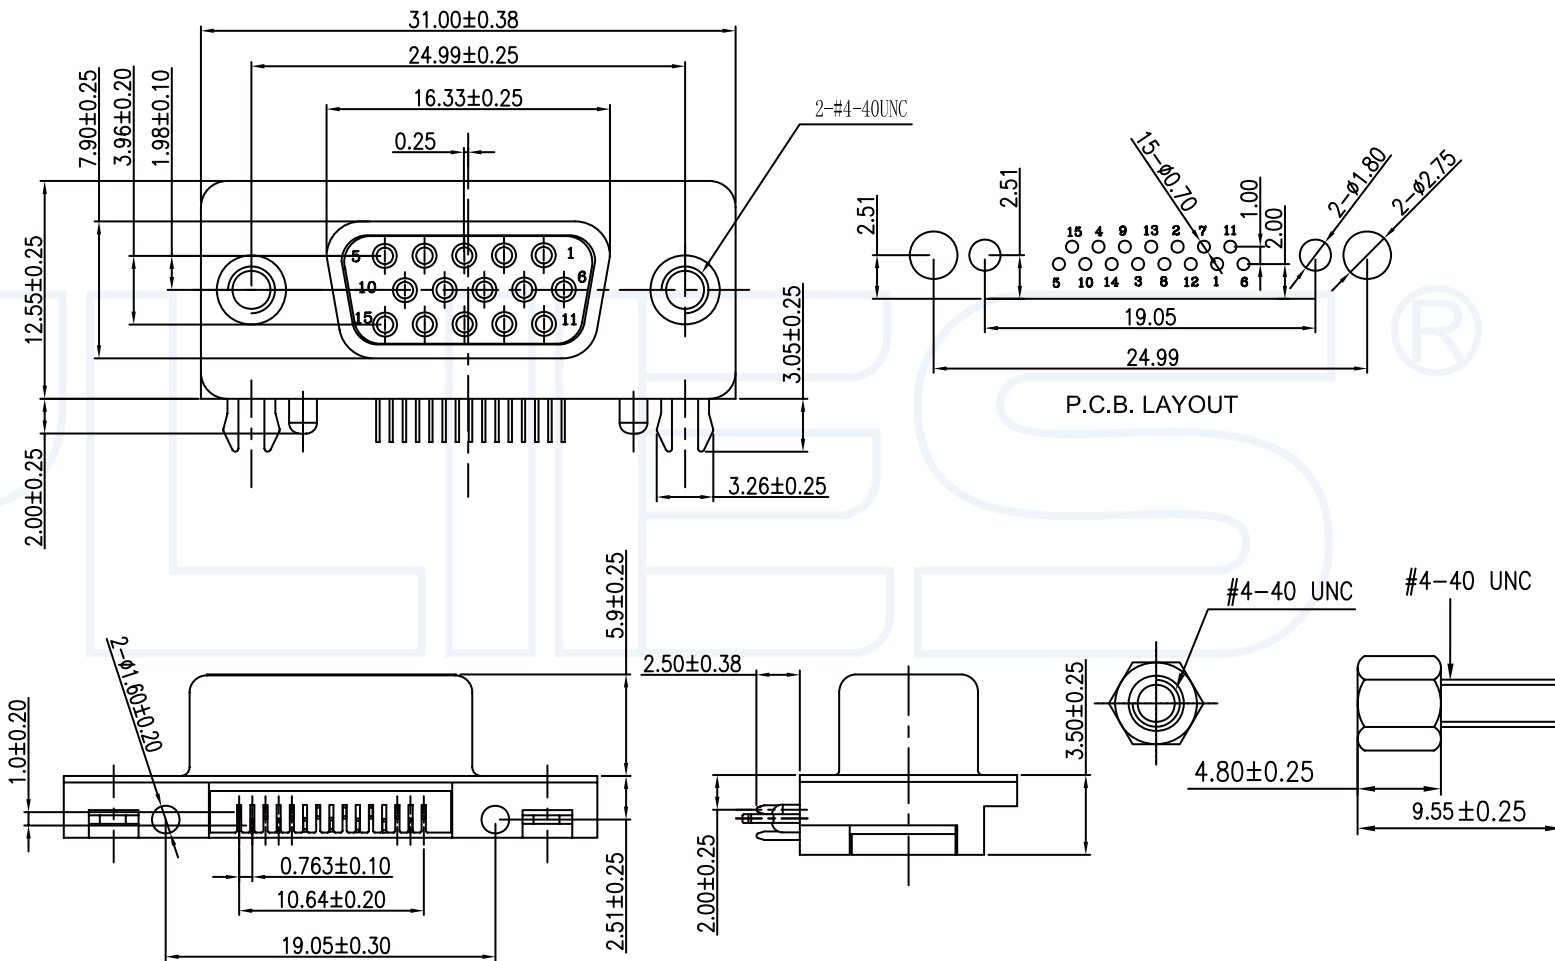

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn


TITLE

482-D-SUB 母头插座 三排超薄 前八后七

DATE

2018-02-18

PROJECTON



REV

A

UNIT

mm

SCALE

1:1

PAGE

1/1

PART NO:

DS-3FRB0AXA

DRAWING NO:

1

2

3

4

5

6

7

8

9